
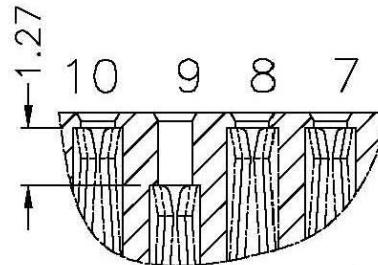


RECOMMEND P.C.B. LAYOUT  
BOTTOM VIEW

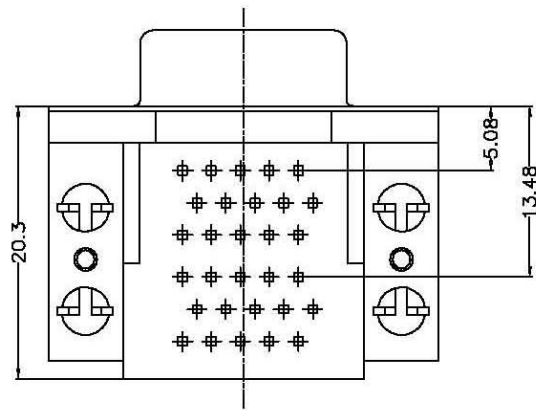

**MATERIALS**

- 1. HOUSING : THERMOPLASTIC (UL 94V-0).
- 2. TERMINAL : COPPER ALLOY.
- 3. SHELL : STEEL.

**SPECIFICATION**

- 1. CURRENT RATING : 5 AMP. MAX.
- 2. DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
- 3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
- 4. CONTACT RESISTANCE : 30m OHMS MAX.
- 5. OPERATING TEMPERATURE : -55°C TO +105°C.
- 6. DURABILITY : 500 CYCLES.
- 7. MAX. PROCESSING TEMPERATURE : 230°C FOR 30~60 SECONDS. (HI.-TEMP. PLASTIC)

UNIT	mm	Projection		Secom International Enterprise Co., Ltd.			
TOLERANCES				TITLE			
General Tolerance		Angle Tolerance		D-SUB Dual row 90 degree 15 pin Female to Female connector			
x. = ±		x. = ±2°					
.x = ±0.38		.x = ±					
.xx = ±0.25							
.xxx = ±				PART NO.	DSUB-SDA15FF-TGB		
DRAWN	Kevin	DATE	2008/10/10				
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	A0