

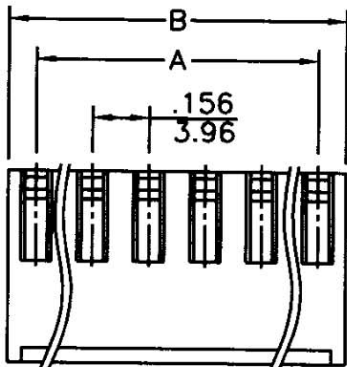


inches
mm

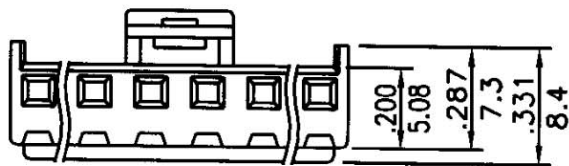

Specifications

- * Current rating: 5A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -25°C~+120°C
- * Insulation resistance: 1,000MΩ min.
- * Withstand voltage: 1,500V AC/minute
- * Poles:2-14
- * Material:NYLON 66 UL94V-0 White
- * Suitable CT3962 series terminal

CIRCUITS	DIMENSION in.(mm)		CIRCUITS	DIMENSION in.(mm)	
	A	B		A	B
2	0.156(3.96)	0.311(7.9)	9	1.247(31.68)	1.402(35.6)
3	0.312(7.92)	0.469(11.9)	10	1.403(35.64)	1.559(39.6)
4	0.468(11.88)	0.610(15.5)	11	1.559(39.60)	1.717(43.6)
5	0.624(15.84)	0.780(19.8)	12	1.715(43.56)	1.870(47.5)
6	0.780(19.80)	0.937(23.8)	13	1.871(47.52)	2.028(51.5)
7	0.935(23.76)	1.091(27.7)	14	2.027(51.48)	2.181(55.4)
8	1.091(27.72)	1.248(31.7)			

UNIT	mm	Projection		Seconn International Enterprise Co., Ltd.			
TOLERANCES				TITLE			
x. = ± Angle = ±				.156"(3.96 mm) Pitch wire to board connector			
.x = ±				PART NO. SWB-3960-1xxH			
.xx = ±							
DRAWN	Kevin	DATE	2007/8/20				
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	A1