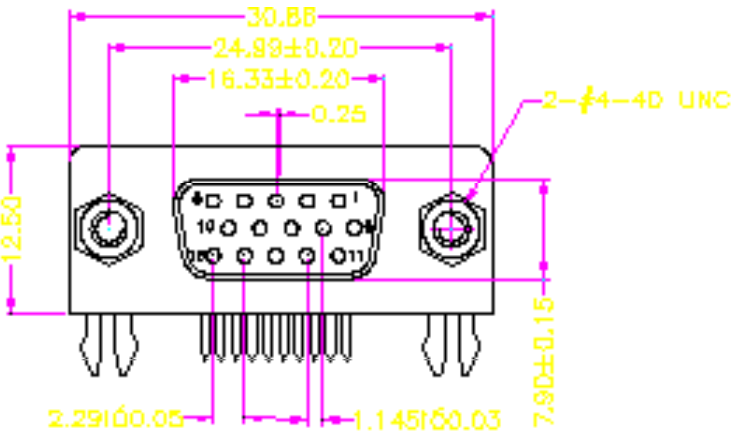

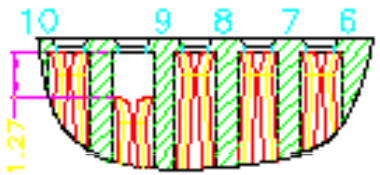

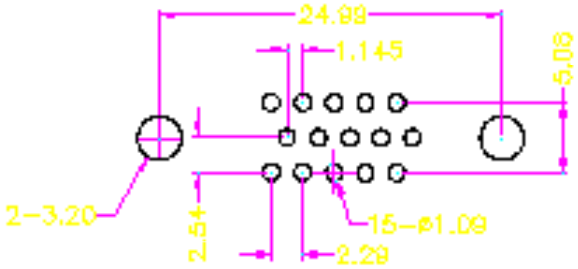

P.C.B. LAYOUT

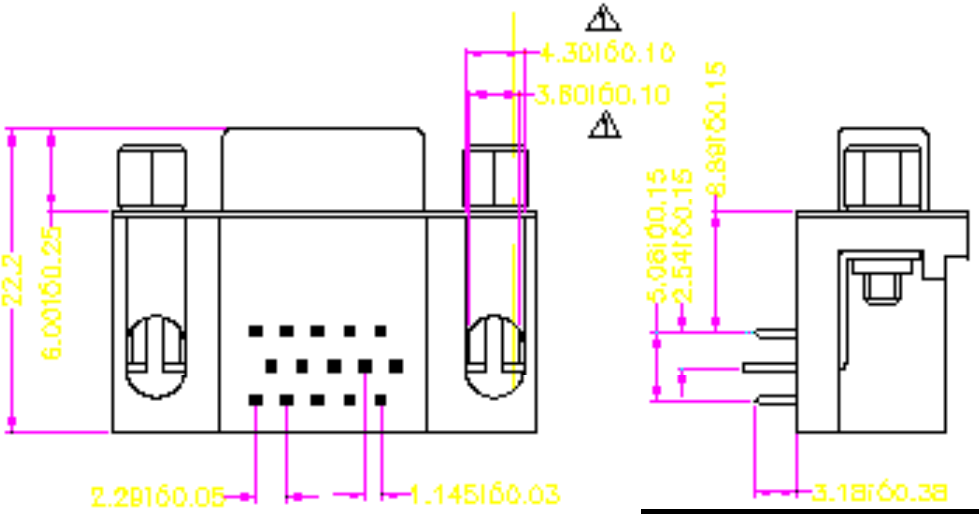

NOTES:

1.MATERIAL

1.1 Insulator:PBT+30%Glass Fiber (UL94V-0)

1.2 Contact:Brass

1.3 Contact Plated:Gold

1.4 Shell:Steel,Tin Plated

2.SPECIFICATION

2.1 Current Rate:5 Amps

2.2 Insulator Resistance:5000MΩ Min. at 500V DC

2.3 Dielectric Strength:1000V Per minute

2.4 Operation Temperature:-55℃ to+105℃

UNIT	mm	Projection		Seconn International Enterprise Co., Ltd.			
TOLERANCES				TITLE			
General Tolerance x. = ±0.5 .x = ±0.3 .xx = ±		Angle Tolerance x. = ±2° .x = ±		D-SUB connector 15 pin Female type			
				PART NO.	DSUB-SF15-TGU618		
DRAWN	Kevin	DATE	2005/4/4				
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	A0