

1 2 3 4 5 6 7 8

F


E

D


C

B

A

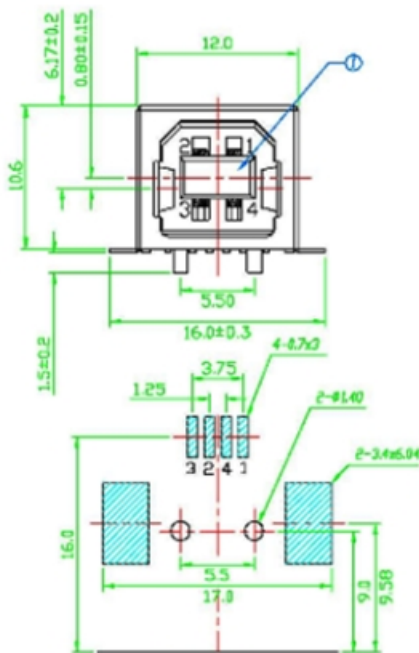

PCB EDGE
PCB LAYOUT
(COMPONENT SIDE)

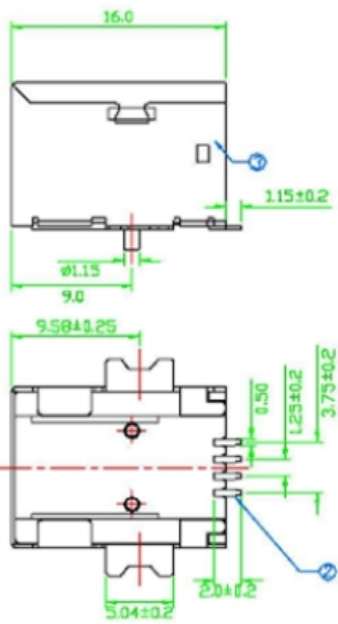

Green Product

Specification:
 Contact Resistance: 30m Ohm Max.
 Insulation Resistance: 1000M Ohm Min. At 500VDC.
 Rated Voltage And Current: 1.5A At 250VAC Minimum.
 Dielectric Withstanding Voltage:
 750V AC (rms) for 1 Minute(Rev. 1.1)
 Durability (Life Test): 1500 Cycles
 Insertion Force: 35 Newton Maximum.
 Extraction Force: 10 Newton Minimum.

| NO. | NAME | MATERIAL | FINISH | Q'TY | REMARK |
|-----|----------|--------------------|-----------------|------|--|
| 1 | HOUSING | NYLON PA9T GF. | WHITE | 1 | |
| 2 | TERMINAL | PHOS. BRONZE T0.25 | GOLD/TIN PLATED | 4 | Gold(1-3μ), Ni(40-60μ), Ti(120μ) (100% pure Tin of lead free plating) |
| 3 | SHELL | BRASS T0.3 | NICKEL PLATED | 1 | NI(80-120μ) |

USB-S M 01-B W
 Color White
 B Type
 Single Row
 USB Series
 Seconn
 SMT

| | | | | | | | |
|------------------------|-----|------|----|---|--|-------------|--|
| UNIT | mm | | | Seconn International Enterprise Co., Ltd. | | | |
| TOLERANCES | | | | TITLE | | | |
| x = ±0.38 .xxx = ±0.05 | | | | USB B Type Flat 4 Pin SMT | | | |
| .x = ±0.25 | | | | PART NO. | | USB-SM01-BW | |
| .xx = ±0.13 | | | | SHEET | | 1/1 | |
| DRAWN | | DATE | | REV | | | |
| SCALE | 1:1 | SIZE | A4 | | | | |

1 2 3 4 5 6 7 8