
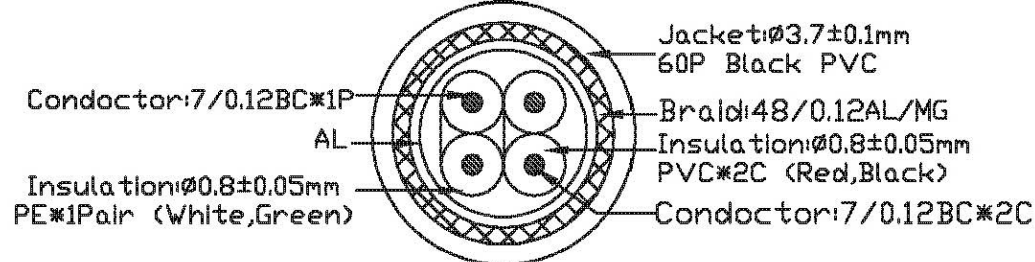


PART NO.		CABLE			PART NO.	
ITEM	MATERIAL	Specification	Q'TY	LENGTH	ITEM	MATERIAL
1	USB Micro B 5pin Shell plated nickel core black	28AWG(7/0.12BC)*1P+28AWG(7/0.12BC)*2C+BD(48/0.10AL/MG)	1pcs	1500 <sup>+30</sup> <sub>0</sub>		
2	Out mold 50P PVC BLACK					
3	USB Micro B 5pin Shell plated nickel core black					

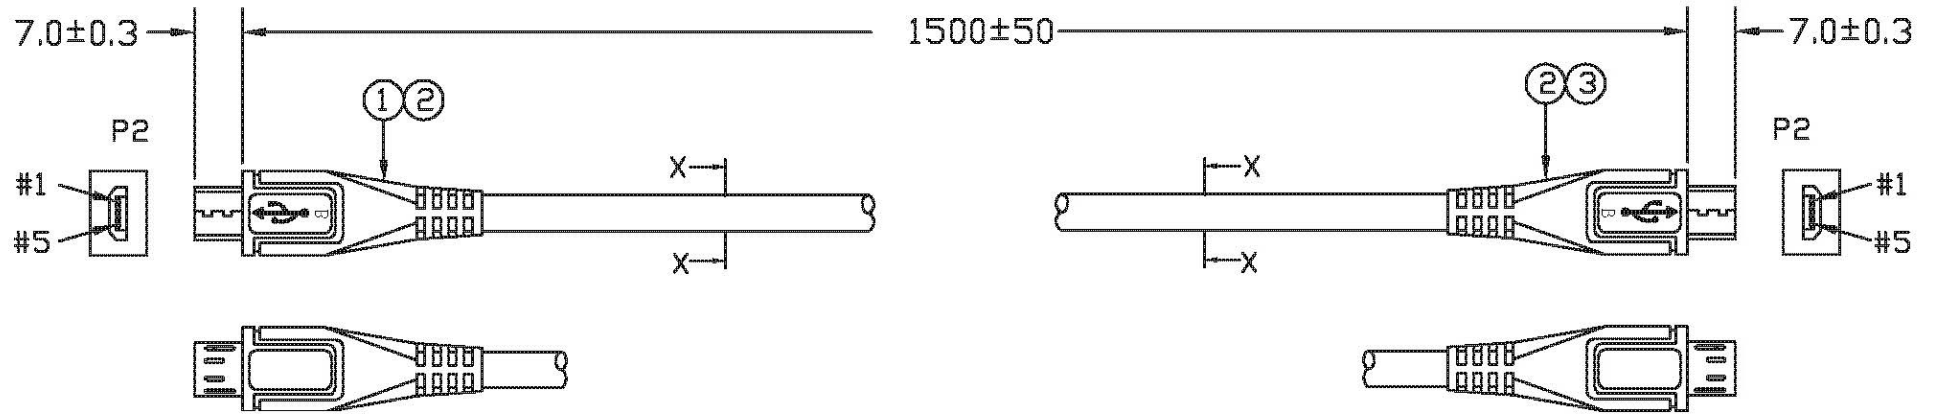

**WIRE ASSIGNMENTS:**

P1	P2
1 — Red —	1
2 — White —	2
3 — Green —	3
4 — Black —	5
Shell — braid —	Shell

**Electronic Test:**  
 1. Conductor Resistance: 2 ohm.  
 2. 100% Open, Short or Mis-wire Tests.  
 3. Insulation Resistance: 10Mchm/Min.  
 4. Hi-Pot DC 300V/10ms.

Note: all material have to apply to 'ROSH' standard.

UNIT	mm	Projection		S <sub>e</sub> - Seconn International Enterprise Co., Ltd.			
TOLERANCES				TITLE			
x. = ± 1.0    x° = ±				Micro USB B 5 pin to Micro USB B 5 pin cable			
.x = ± 0.5    .x.xx° = ±							
.xx = ±    .x.xxx° = ±							
.xxx = ±							
DRAWN	Kevin	DATE	2011/2/18	PART NO. MUB5P-SCMUB5P			
SCALE	1/1	SIZE	A4	SHEET	1/1	REV	A0