


DIE NO. : USB001

DIE NO. : A/F IMC USB003  
EXTERNAL MODEL USB004

PIN OUT

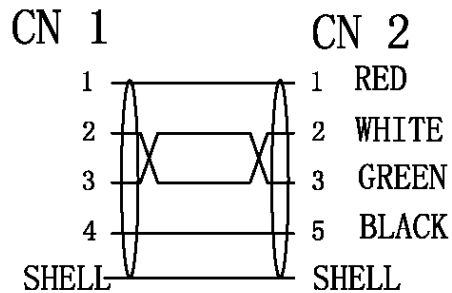

NOTES:

1. Electrical test:

- (1). 100% open short & miss wire test;
- (2). Insulation Resistance: DC 300V 10MΩ
- (3). Conductor Resistance: 3Ω max;

2. All materials must be lead free, cadmium, lead-free solder material, Compliance with RoHS environmental regulations

3. MARKING: AWM STYLE 2725 80° C 30V VW-1 USB2.0 CABLE

MATERIAL LIST:

**Seconn International Enterprise Co., Ltd.**

NO.	PARTS. NAME	SPECIFICATION STANDARD	QT' Y	REMARK	DRAWING NO.	PART NAME	ICON	TOLERANCE	UNIT	MM
④	CABLE	28#*1P+28#*2C+ADB(7/0. 12TC*1P+7/0. 12TC*2C+AL+7*0. 10BC+64/0. 12CCAM+3. 8mmOD				USB Cable A/M-A/F NICKEL				
③	AF SHELL	USB A/F PUNCTURE-TYPE THE PIN GOLD PLATING , THE SHELL FOR NICKEL PLATING	1		CUSTOMER			X. ±0.50		
②	AM PLASTICCORE	USB AM PLASTIC CORE	1		CUSTOMER'S ITEM					
①	AM SHELL	USB A/M PUNCTURE-TYPE THE PIN GOLD PLATING THE SHELL FOR NICKEL PLATING	1		APPRO BY	CHECK BY	DRAWN BY			
							shenjuan		PAGE	1/1