

6

5

4

3

2

1

F

F

E

E

D

D

C




C

B


B



A

A

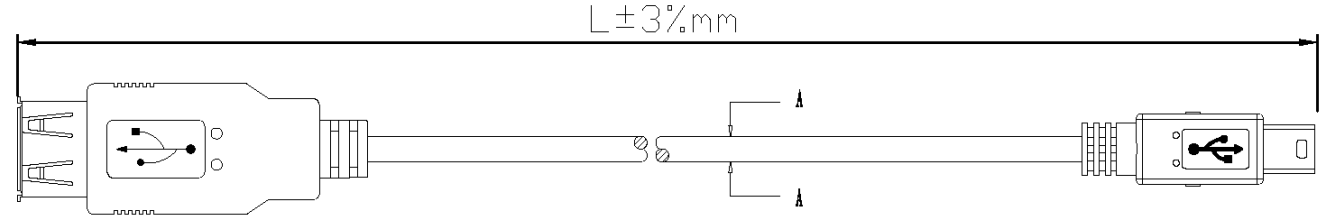


A FEMALE

MARKING:  AWM E200765 STYLE 2725 60° C 30V
1P/28AWG AND 2C/26AWG USB 2.0




Pin Assignment

A FEMALE MIN 5PIN

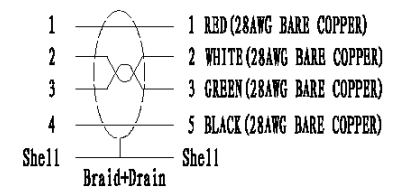

4	PM. 10	OUTER MOLD: 45P PVC	9	G
3	USB-MINI	USB MINI 5P CONNECTOR FLASH GOLD; NICKEL PLATE SHELL	1	SET
2	USB-AF	USB A FEMALE CONNECTOR FLASH GOLD ;NICKEL PLATE SHELL	1	SET
1	USB-28/28	USB CABLE 28AWG/1P+28AWG/2C +AB(16/3/0.12mm)+DRAIN OD: 3.8 ± 0.2mm	L	M
NO	P/N	DESCRIPTION	QTY	UNIT

UNIT	mm	Projection		Seconn International Enterprise Co., Ltd.			
TOLERANCES				TITLE			
x. = ± .xxx = ± .x = ± .xx = ±0.01				USB A female to Mini USB 5 Pin female Cable			
				PART NO.		US-SCAFM5P	
DRAWN	Kevin	DATE	Oct. 08, 2011				
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	A1