

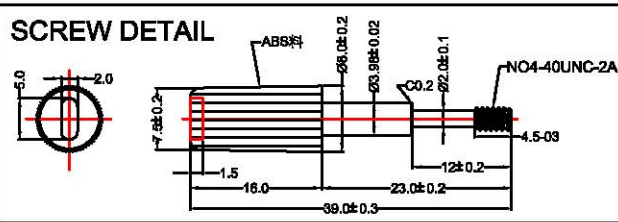


RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2012/03/08	

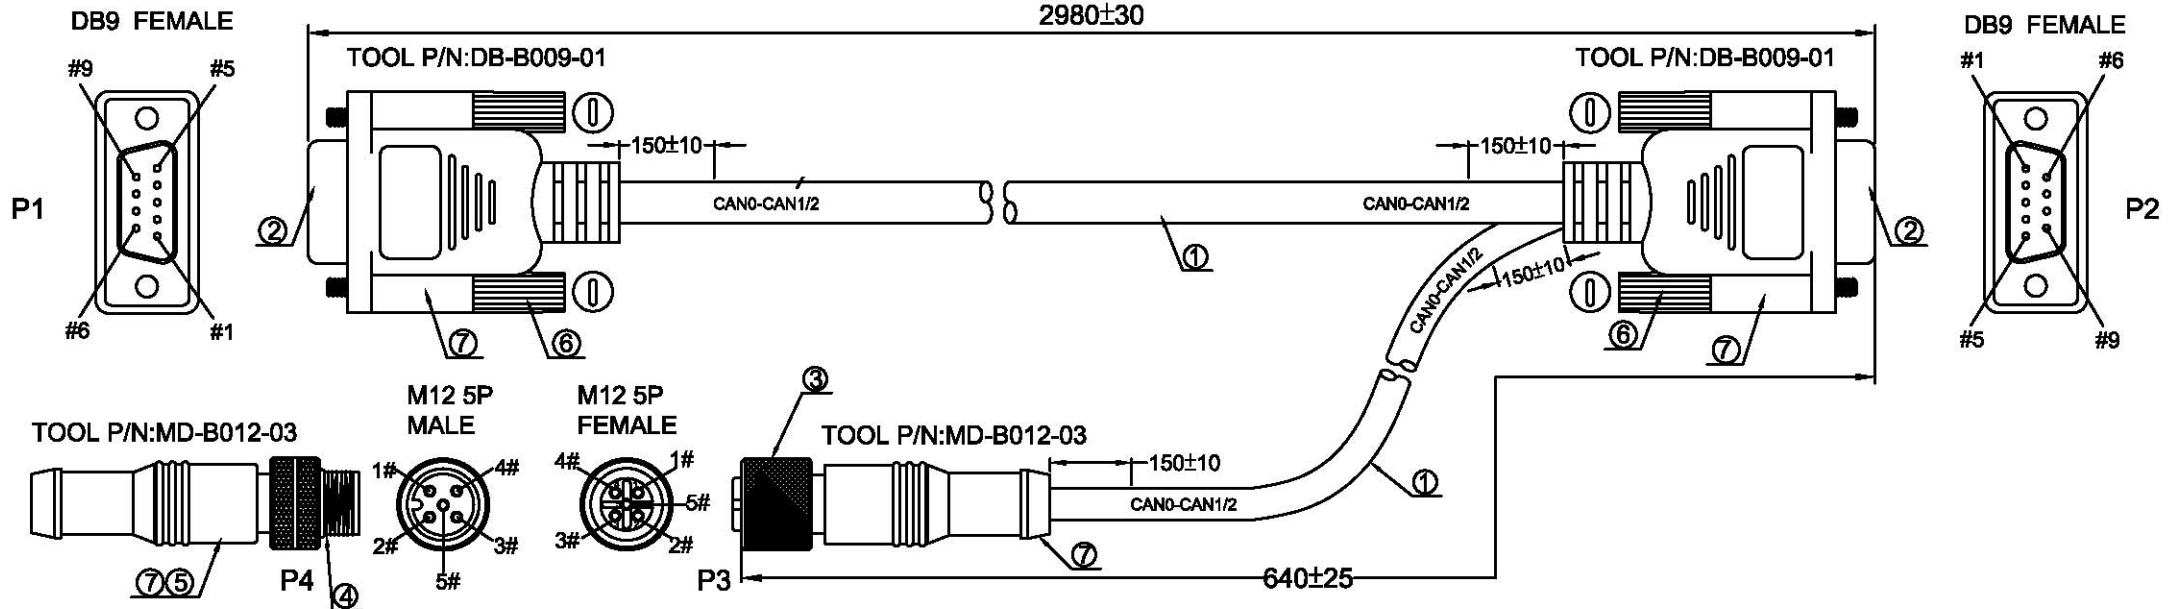

PIN ASSIGNMENT

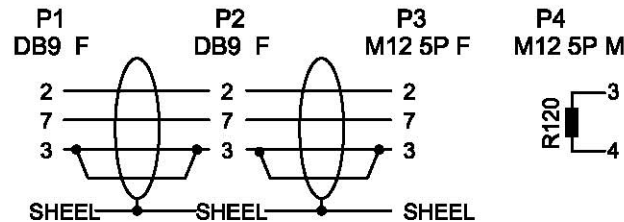

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 (a). 100% OPEN, SHORT & MISWIRE TEST,
 (b). INSULATOR RESISTANCE: 20 Mohm MIN.
 DC 300V 0.01sec.
 (c). CONTACT RESISTANCE: 3 ohm MAX.

ITEM	QTY	PART NUMBER	DESCRIPTION
8	1		LABEL.
7		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
6	4	C0075	SCREW:#4-40UNC Q23MM, BLACK ABS.
5	1		RESISTANCE R120.
4	1	A0587	M12 5P MALE FROM SECONN.
3	1	A0667	M12 5P FEMALE FROM SECONN.
2	1	A0010	DB9 FEMALE ,SOLDER TYPE , FROM SECONN.
1	2	E0873	26AWG*5C+ADB OD:5.0 BLACK PVC JACKET UL2464.

UNIT	mm	Projection		Se	Seconn International Enterprise Co., Ltd.			
DRAWN	Wushijie	SCALE	1:1		TITLE			
CHECK, BY	Caojiawei	REV	A		DB9 FEMALE/FEMALE TO M12 5P MALE			
APP, BY	Mr. Huang	DATE	2012/03/08		TOLERANCES			
DWG NO.	SE-S-0043-1				X. = \pm	.X = \pm	.XX = \pm	.XXX = \pm
PART NO.					SHEET	1/1	SIZE	A4