

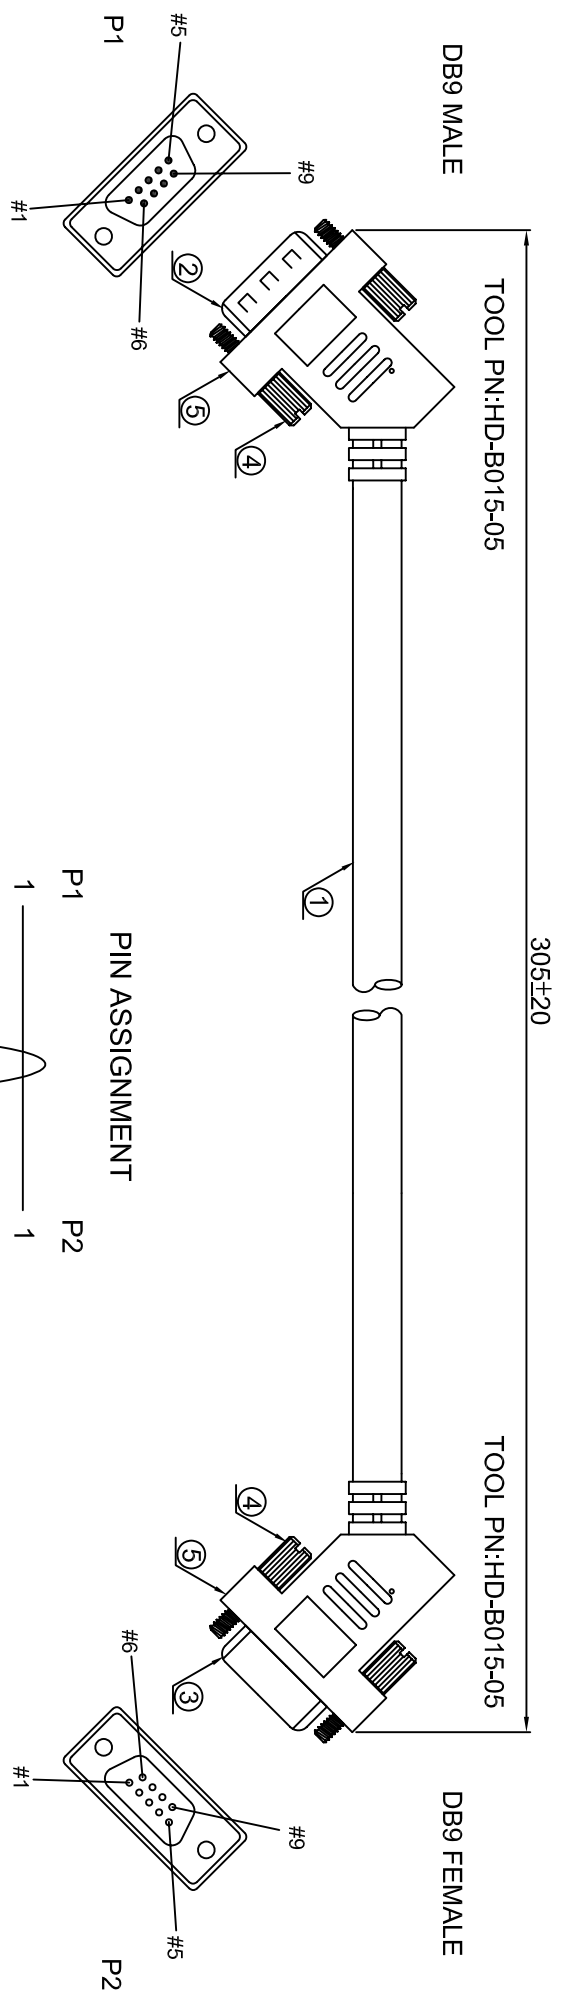


ROHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2011/10/18	

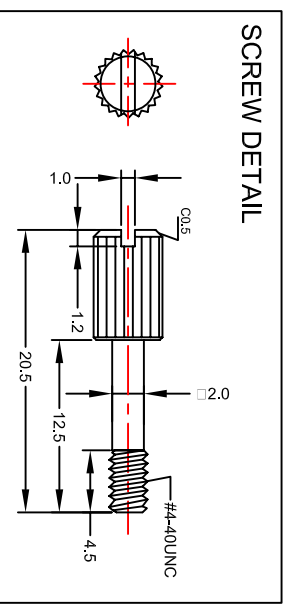

NOTES:
 1. PIN ASSIGNMENT SEE TO WIRE LIST.
 2. ELECTRICAL TEST CONDITION:
 (a).100%OPEN,SHORT & MISWIRE TEST,
 (b). INSULATOR RESISTANCE:20 Mohm MIN.
 DC 300V/0.01sec.
 (c). CONTACT RESISTANCE:1 ohm MAX.

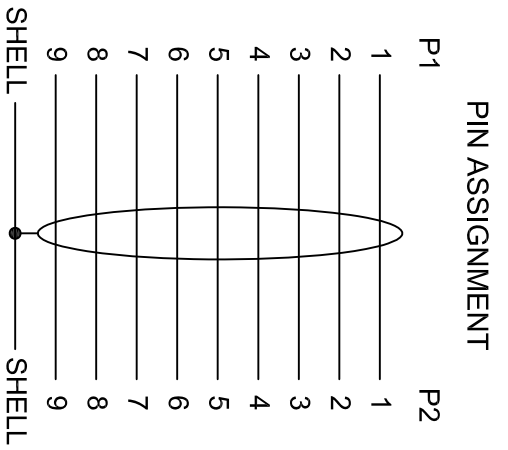

ITEM	QTY	PART NUMBER	DESCRIPTION
5		G0001	ALL CONNECTOR OVERMOLD BLACK PVC.
4	4	C0022	SCREW:#4-40 UNC 5.0*20.5, NICKEL PLATED.
3	1	A0010	DB9P FEMALE SOLDER TYPE,BLACK INSULATOR.
2	1	A0009	DB9P MALE SOLDER TYPE,BLACK INSULATOR.
1	1	E0079	28AWG*9C+DRAIN+AM, BLACK JACKET, OD:5.3MM, UL2464.

UNIT	mm	Projection	1:1	Scale	1:1	DATE	2011/10/18	DWG NO.	SE-S-0028	PART NO.	SE-S-0028-0.305M
DRAWN	<i>Barry</i>	SCALE	1:1	CHECK,BY	REV	DATE	2011/10/18	APP,BY		PART NO.	SE-S-0028-0.305M
TITLE: 45° DB9 M/F TOLERANCES: X.= ± .X= ± .XX= ± .XXX= ± SHEET: 1/1 SIZE: A4											

Seconn International Enterprise Co., Ltd.