



ROHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2011/10/18	

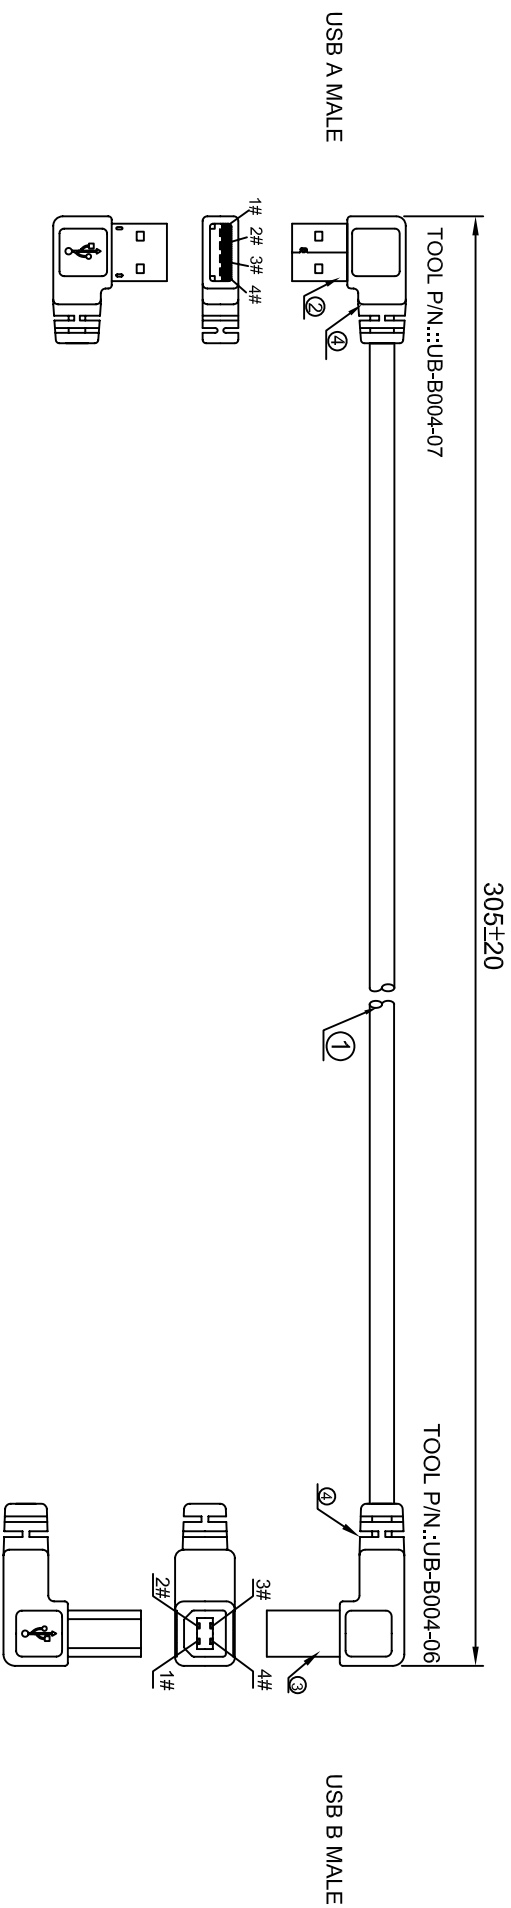

PIN ASSIGNMENT

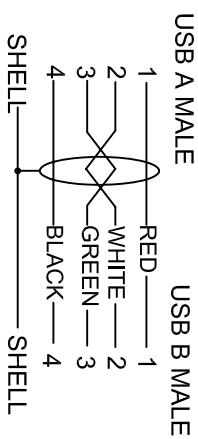

NOTES:
 1. PIN ASSIGNMENT SEE TO WIRE LIST.
 2. ELECTRICAL TEST CONDITION:
 (a). 100% OPEN, SHORT & MISWIRE TEST,
 (b). INSULATOR RESISTANCE: 20 Mohm MIN.
 DC 300V 0.01sec,
 (c). CONTACT RESISTANCE: 3 ohm MAX.

ITEM	QTY	PART NUMBER	DESCRIPTION
4		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
3	1	A0226	USB B MALE, WHITE INSULATOR, SOLDER TYPE.
2	1	A0225	USB A 4P MALE, WHITE INSULATOR, SOLDER TYPE.
1	1	E0329	USB 2.0 28AWG*1PAIR+28AWG*2C+AM+DRAIN+BRAID, OD: 3.5MM, BLACK PVC JACKET, UL2725

UNIT	mm	Projection	Scale	1:1	DATE	2011/10/18	DWG NO.	SE-S-0033	PART NO.	SE-S-0033-0.305M	SHEET	1/1	SIZE	A4
DRAWN	<i>Barney</i>	SCALE	1:1		REV	A	APP, BY							
CHECK, BY		DATE	2011/10/18											
Seconn International Enterprise Co., Ltd. TITLE: USB A M TO USB B M TOLERANCES:														