


ROHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2011/10/18	


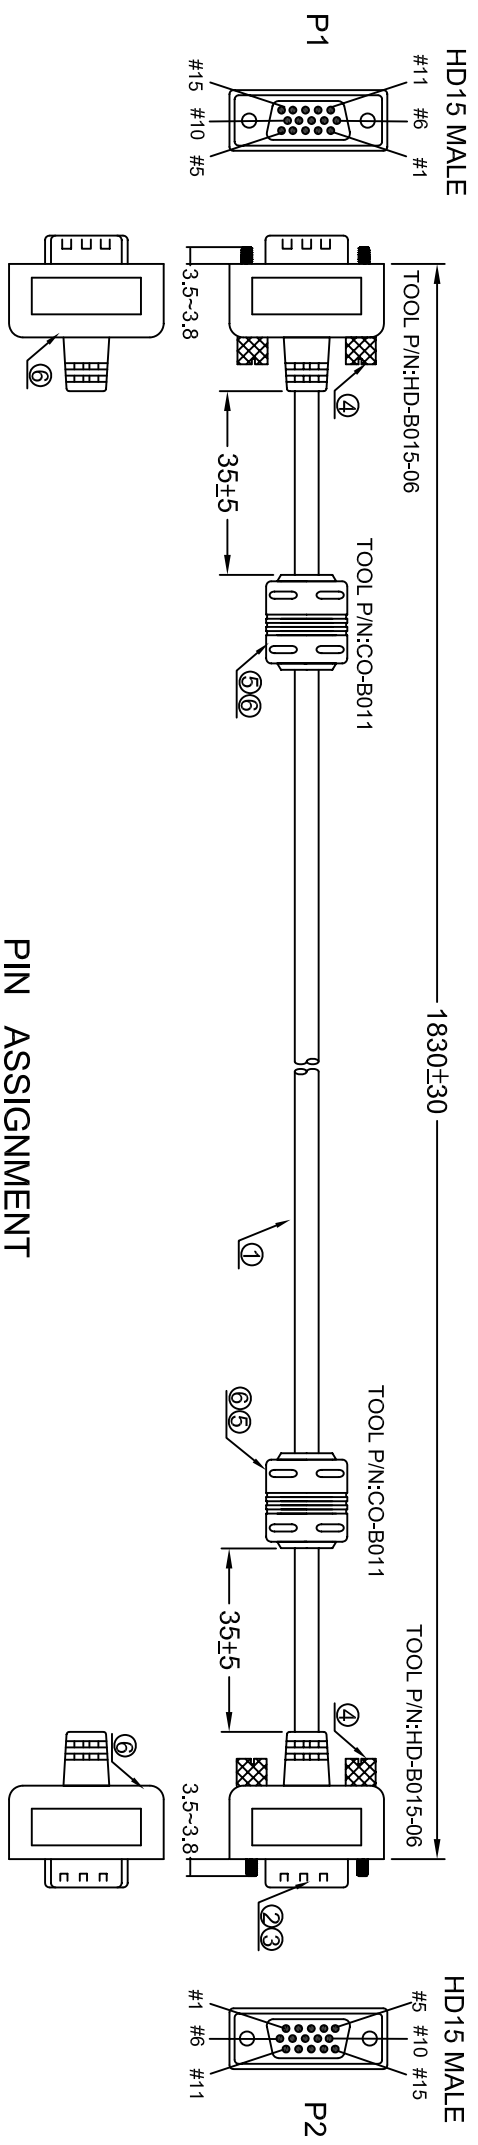


NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100%OPEN,SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE:20 Mohm MIN, DC 300V 0.01sec,
 - CONTACT RESISTANCE:3 ohm MAX.

ITEM	QTY	PART NUMBER	DESCRIPTION
6		G0001	CONNECTORS AND CORE MOLDED BLACK PVC
5	2	T0021	CORE:12.0*12.7*6.0MM
4	4	C0044	SCREW:#4-40UNC 6.2*25.5mm NICKEL PLATED.
3	30	B0003	TERMINAL:□0.76 MALE GOLD PLATED 3U".
2	2	A0017	HD15P MALE ,BLACK INSULATOR, CRIMP TYPE.
1	1	E0394	UL20276 32AWG*3COAX+30AWG*9C+AL/MTLAR +DRAIN+BRAID,OD:5.0mm,BLACK PVC JACKET.

PIN ASSIGNMENT

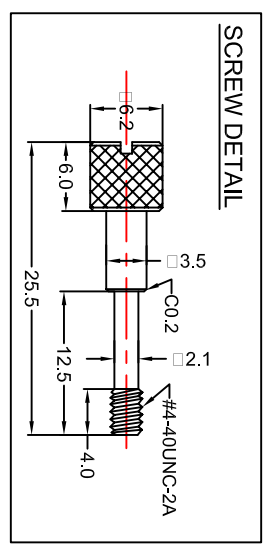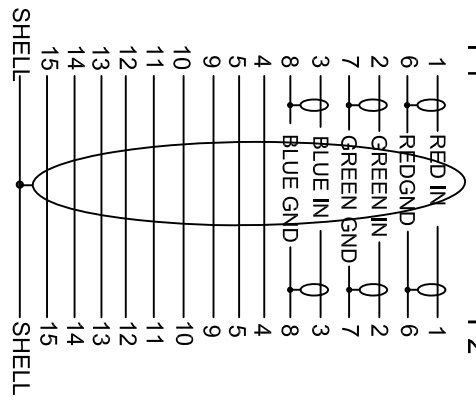

UNIT	mm	Projection	Scale	1:1	Seconn International Enterprise Co., Ltd.
DRAWN	<i>Barry</i>	SCALE	1:1		TITLE
CHECK,BY		REV	A		HD15 M/M
APP,BY		DATE	2011/10/18		TOLERANCES
DWG NO.	SE-S-0030	X.= ±	X.= ±	XX.= ±	.XXX.= ±
PART NO.	SE-S-0030-1.83M	SHEET	1/1	SIZE	A4