


RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2013/02/27	

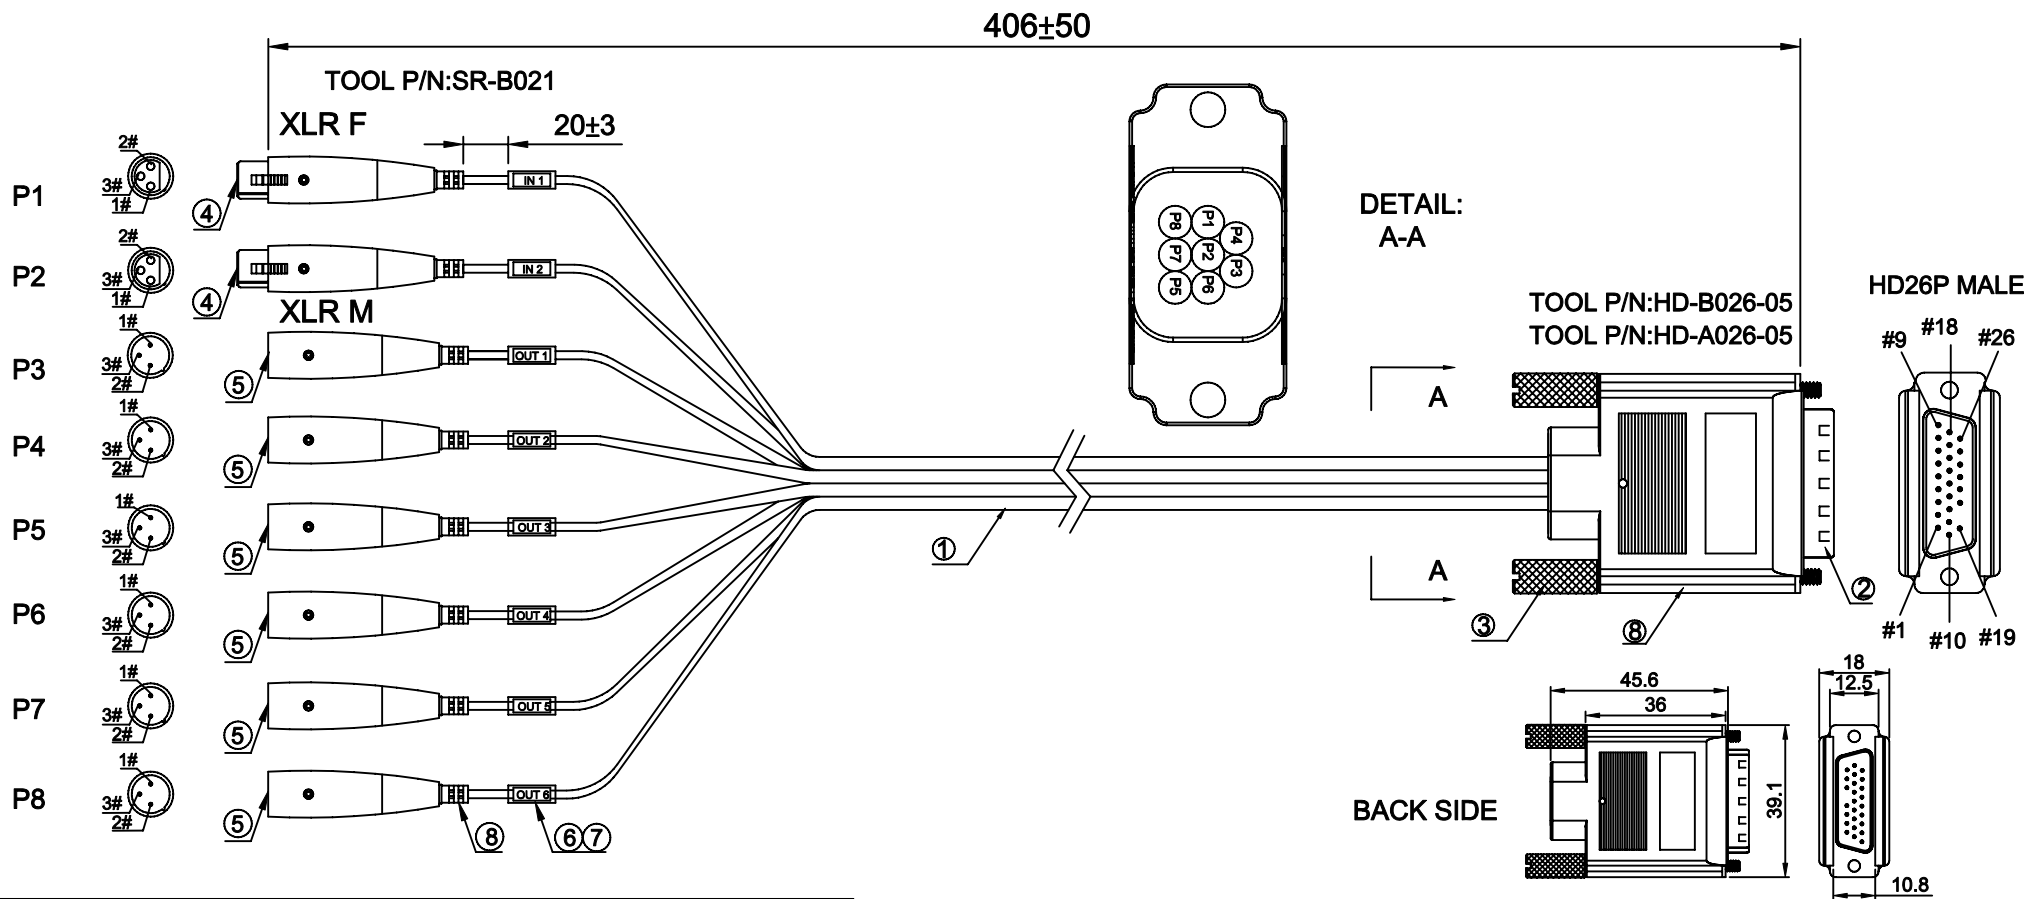


8		G0001	ALL CONNECTOR MOLDED HOODS BLACK PVC.
7	8		LABEL.
6	8		TRANSPARENT TUBE.
5	6	A0220	XLR MALE GREY INSULATOR.
4	2	A0219	XLR FEMALE BEIGE INSULATOR.
3	2	C0278	SCREW:#4-40UNC 6.0*55MM NICKEL PLATED.
2	1	A0123	HD26PIN MALE SOLDER TYPE,BLACK INSULATOR.
1	8	E0456	UL2464 22AWG/2C+AD OD:4.5MM JACKET:BLACK.
ITEM	QTY	PART NO.	DESCRIPTION


UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.		
DRAWN	<i>Yi jialu</i>	SCALE	FREE	TITLE			
CHECK, BY	<i>Bao jianwei</i>	REV	A	2*XLR F+4*XLR M/HD26P M			
APP, BY	<i>Mr. Huang</i>	DATE	2013/02/27	TOLERANCES			
DWG NO.	SE-S-0069			X.= ±	.X.= ±	.XX.= ±	.XXX.= ±
PART NO.		SHEET	1/2	SIZE	A4		

RoHS COMPLIANT

PIN ASSIGNMENT

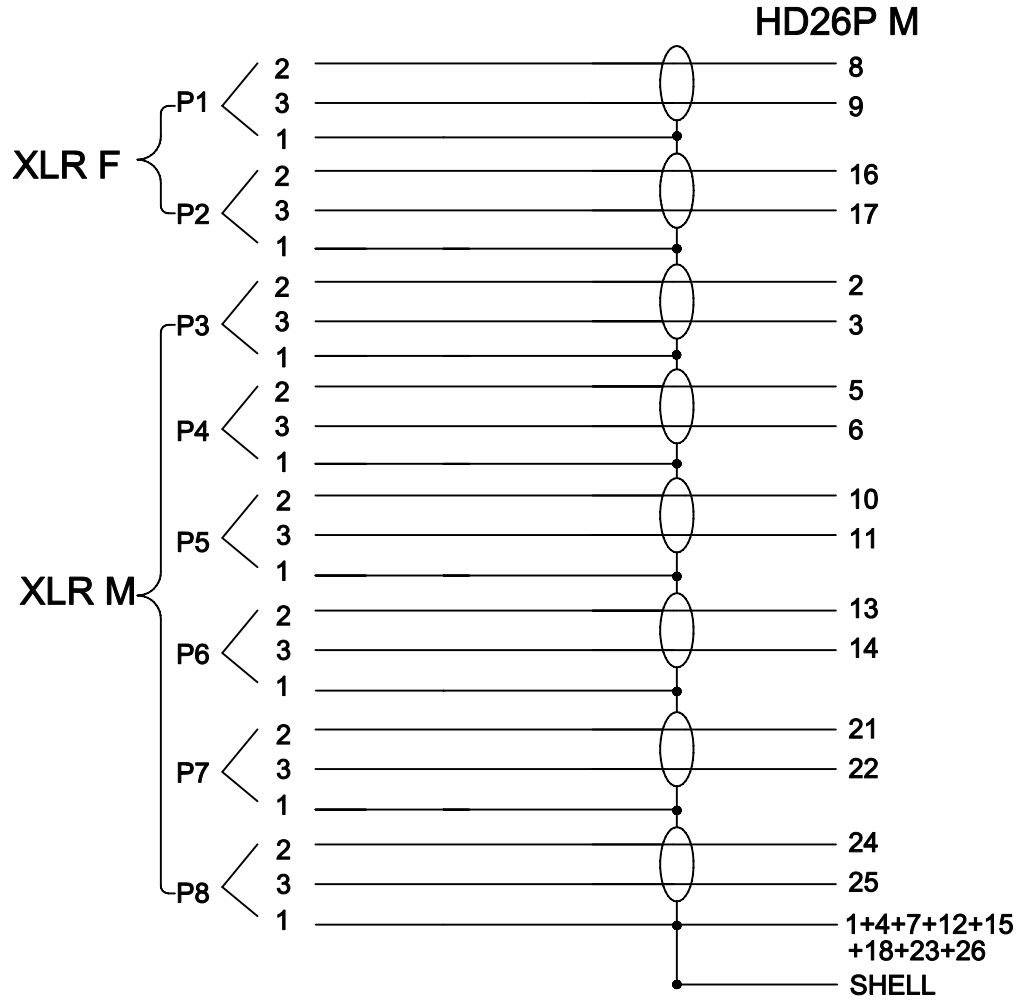


DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2013/02/27	

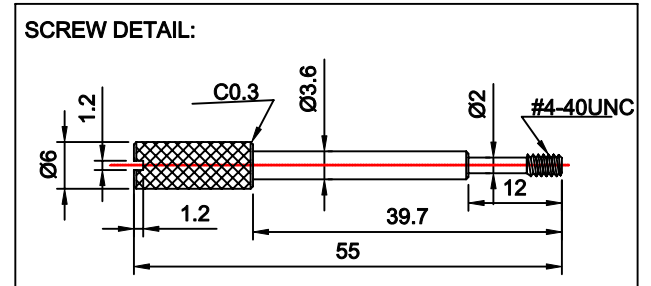

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100% OPEN, SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE: 50 Mohm MIN.
DC 300V 0.01sec,
 - CONTACT RESISTANCE: 3 ohm MAX.
- DO NOT INSERT PIN IN LOCATION 20PIN AND 19PIN NO CONTACT.

LABEL LIST

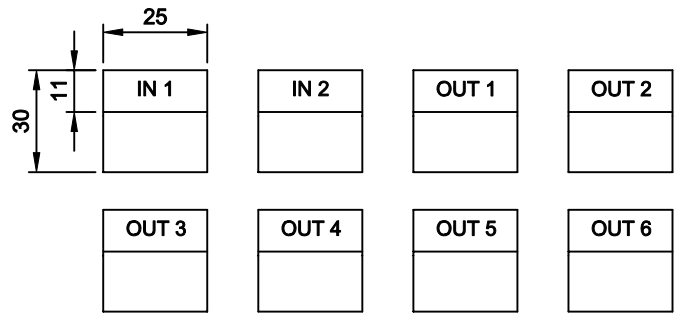

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.	
DRAWN	<i>Yi jialu</i>	SCALE	FREE	TITLE		
CHECK, BY	<i>Bao jianwei</i>	REV	A	2*XLR F+4*XLR M/HD26P M		
APP, BY	<i>Mr. Huang</i>	DATE	2013/02/27	TOLERANCES		
DWG NO.	SE-S-0069		X.= ±	.X.= ±	.XX.= ±	.XXX.= ±
PART NO.			SHEET	2/2	SIZE	A4