


DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2012/11/06	

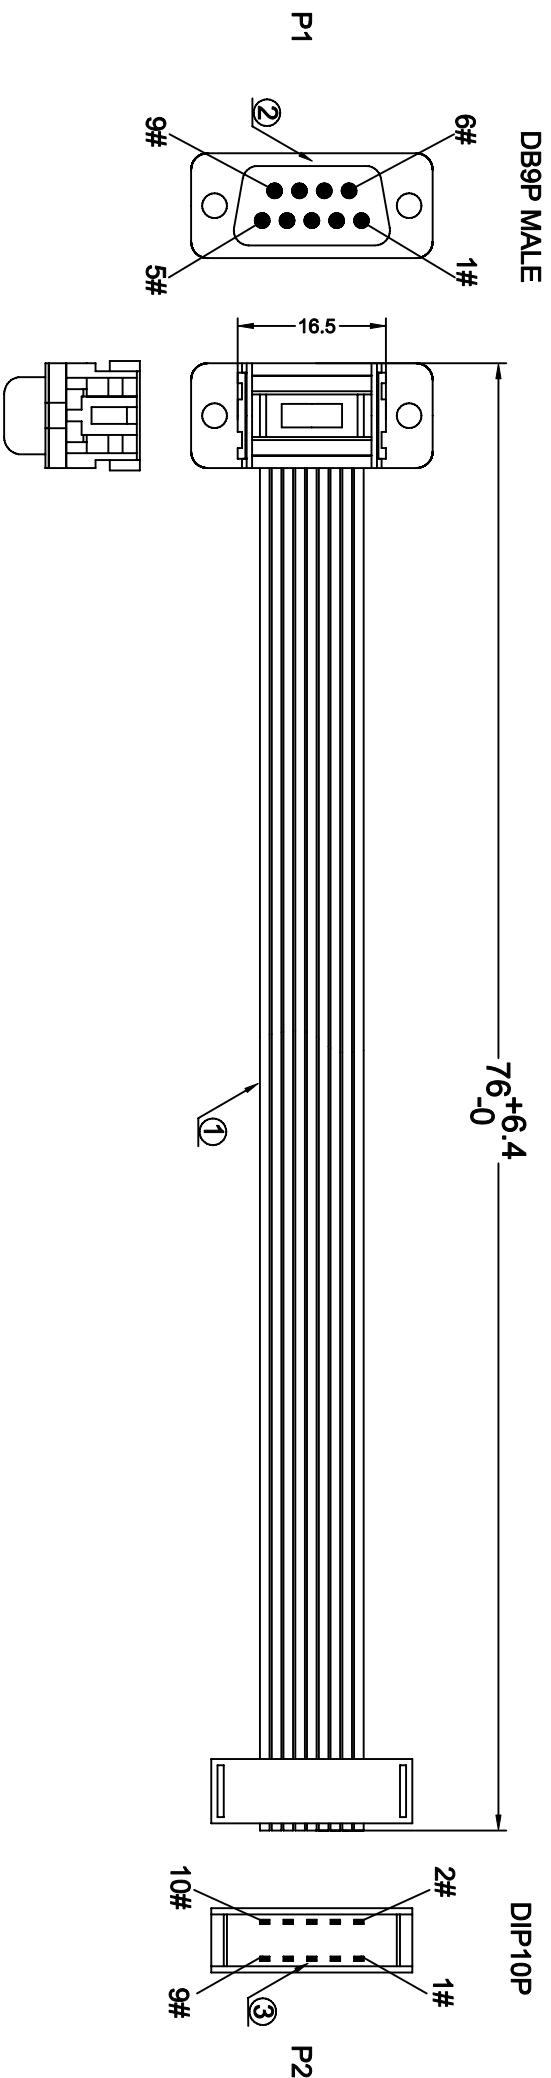

PIN ASSIGNMENT

P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100% OPEN, SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.01sec.
 - CONTACT RESISTANCE: 10hm MAX.

ITEM	QTY	PART NUMBER	DESCRIPTION
3	1		DIP10P BLACK INSULATOR.
2	1		DB9P MALE BLUE INSULATOR I.D.C TYPE.
1	1		28AWG*9C 1.27MM PITCH FLAT CABLE.

UNIT	mm	Projection	SCALE	1:1	TITLE
DRAWN	<i>Shuang shengyan</i>	SCALE	1:1		
CHECK, BY		REV	A		
APP, BY		DATE	2012/11/06		
DWG NO.	SE-S-0055				
PART NO.	195-000032				

Seconn International Enterprise Co., Ltd.

TITLE

DB9P MALE/DIP10P

TOLERANCES

X. = ± .X = ± .XX = ± .XXX = ±

SHEET

1/1

SIZE

A4