



型 号	模 号
AM外模:	
AF外模:	

REV.	DESCRIPTION	DATE	DR.	APPD
B	△ Revise Dimensioning △ Revise Electrical Character	2021.08.23		
	△ Revise Cable Spec.			
C	△ Correct Cable UL No. & Packing Length	2021.09.28	Diana	

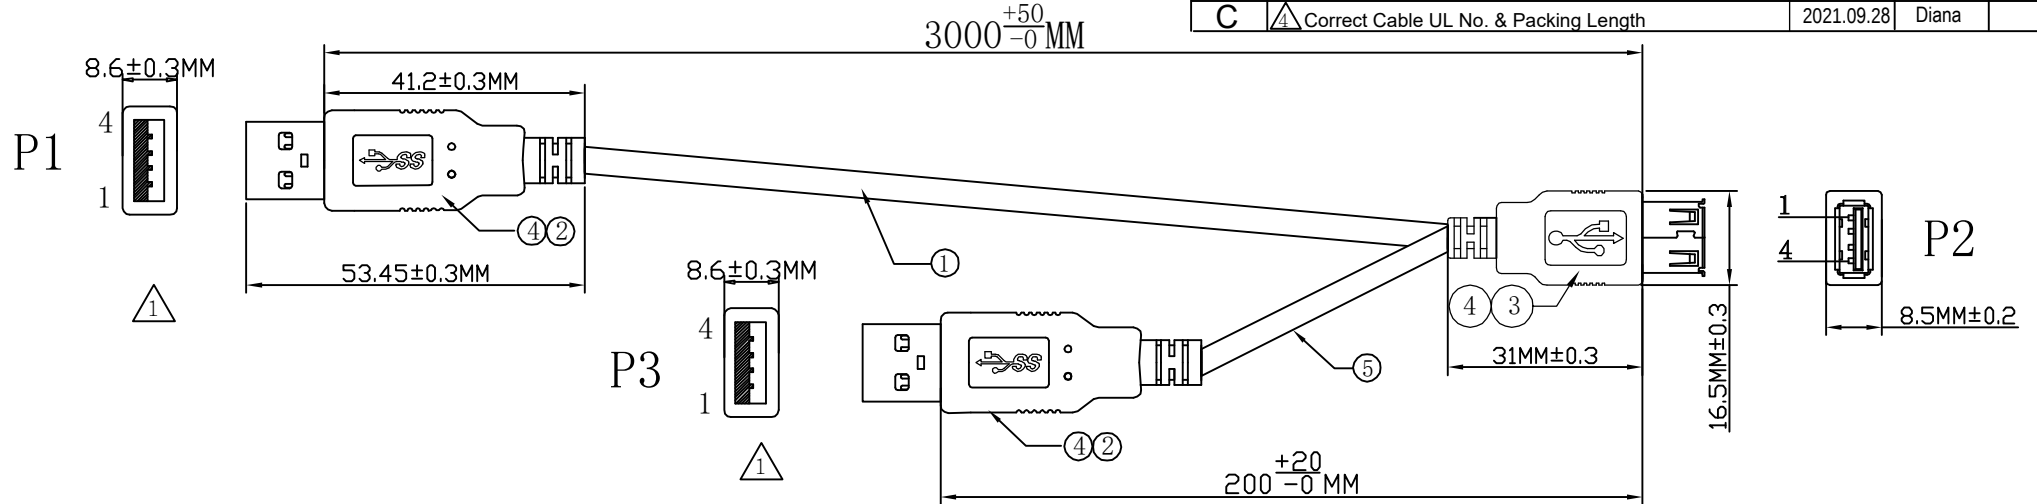


PIN ASSIGNMENT

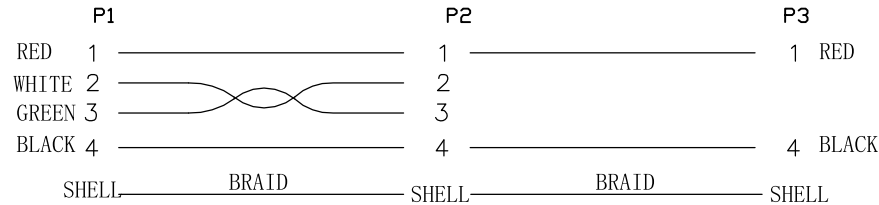

ELECTRICAL CHARACTER:

- 100% OPEN&SHORT TESTING
- WITHSTANDING VOLTAGE:DC 300V 0.1Sec
- INSULATION RESISTANCE: 10M Ohms(Min) △2
- CONDUCTIVE RESISTANCE:5 Ohms(Max)

PACKING:

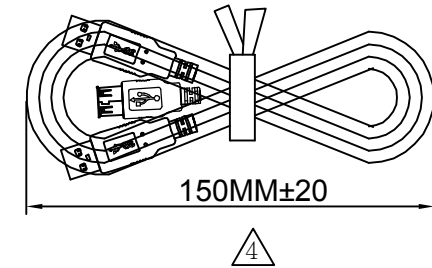

PART LIST: ALL "ROHS" COMPLIANT, ALL MATERIALS ARE EQUIVALENT.

ITEM	STANDARD SPECIFICATION	Q' TY	UNIT
5	CABLE : UL2725 20AWG*2C OD:4.8±0.2MM JACK BLACK PVC △3		
4	PVC:45P BLACK.		Kg/1K
3	USB 2.0 AF TYPE GOLD CONNECTOR,NICKEL PLAIED SHELL,PLASTLC:WHITE.	1	SET
2	USB 2.0 AM TYPE GOLD CONNECTOR,NICKEL PLATED SHELL,PLASTIC:WHITE	2	SET
1	CABLE : UL2725 28AWG*1P+20AWG*2C+AB OD:4.8±0.2MM. JACK BLACK PVC. △3	2	PCS

 Seconn International Enterprise Co., Ltd.							
TOLERANCES			PROJECTION	TITLE			
AS DRAWING				Y Type USB A 2.0 Male to USB 2.0 A Female Cable Black L: 3000mm			
			UNIT				
			mm				
DRAWN	Diana	DATE	2021/08/11	PART NO.	SC-S-2108-1114		
SCALE	X:1	SIZE	A4	SHEET	1/1	REV	C