


型 号	模 号
AM外模:	
AF外模:	

REV.	DESCRIPTION	DATE	DR.	APPD
B	△ Revise Electrical Character △Revise Cable Spec.	2021.08.23		
C	△ Revise Cable Length	2021.09.02		

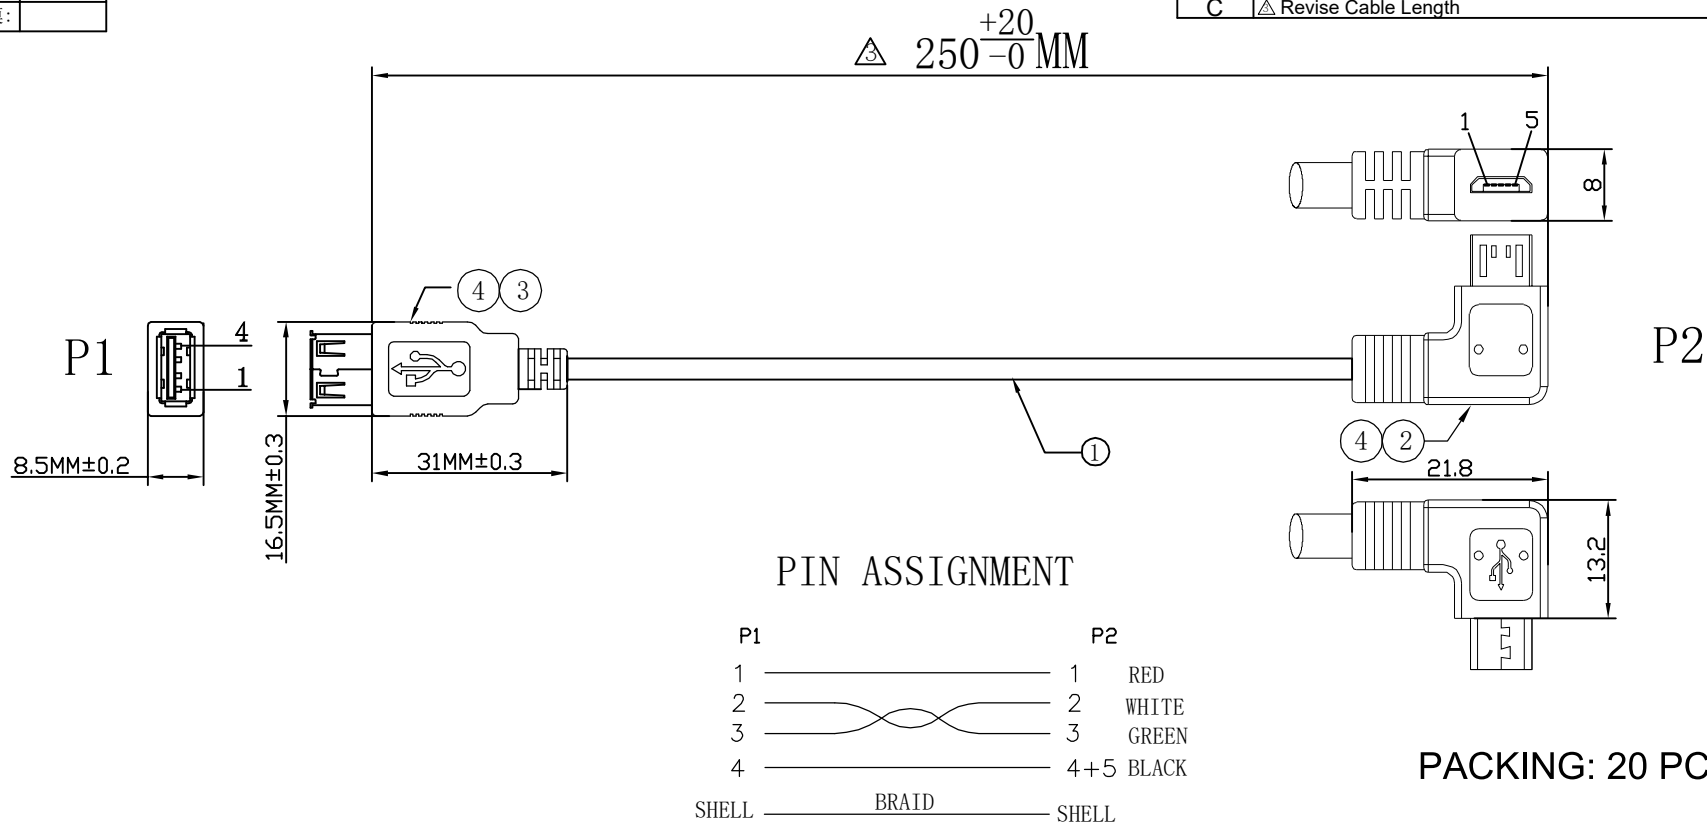

PACKING: 20 PCS / Bundle

ELECTRICAL CHARACTER:

1. 100% OPEN&SHORT TESTING
2. WITHSTANDING VOLTAGE:DC 300V 0.1Sec
3. INSULATION RESISTANCE: 10M Ohms(Min)
4. CONDUCTIVE RESISTANCE: 5 Ohms(Max)



PART LIST: ALL "ROHS" COMPLIANT, ALL MATERIALS ARE EQUIVALENT.

ITEM	STANDARD SPECIFICATION	Q' TY	UNIT
4	PVC:45P BLACK.		Kg/1K
3	USB 2.0 AF TYPE GOLD CONNECTOR,NICKEL PLAIED SHELL,PLASTLC:WHITE.	1	SET
2	MICRO 5P M TYPE GOLD CONNECTOR,NICKEL PLATED SHELL,PLASTIC:BLACK	1	SET
1	UL2725 28AWG*1P+20AWG*2C+AB OD:4.8±0.2mm BLACK △	2	PCS

 Seconn International Enterprise Co., Ltd.									
TOLERANCES			PROJECTION	TITLE					
AS DRAWING				USB 2.0 A Female to Micro USB 5 Pin Male 90 Deg Cable Black L: 250mm					
			UNIT						
			mm						
DRAWN	Diana	DATE	2021/08/11	PART NO.	SC-S-2108-1115				
SCALE	X:1	SIZE	A4	SHEET	1/1	REV	C		