


使用机器具型/编号	测试条件

修改内容			
日期	版本	描述	制定
20/2/18	A1	Modify Connector exposed dimensions, Remark Micro-Fit are by AUK	Diana

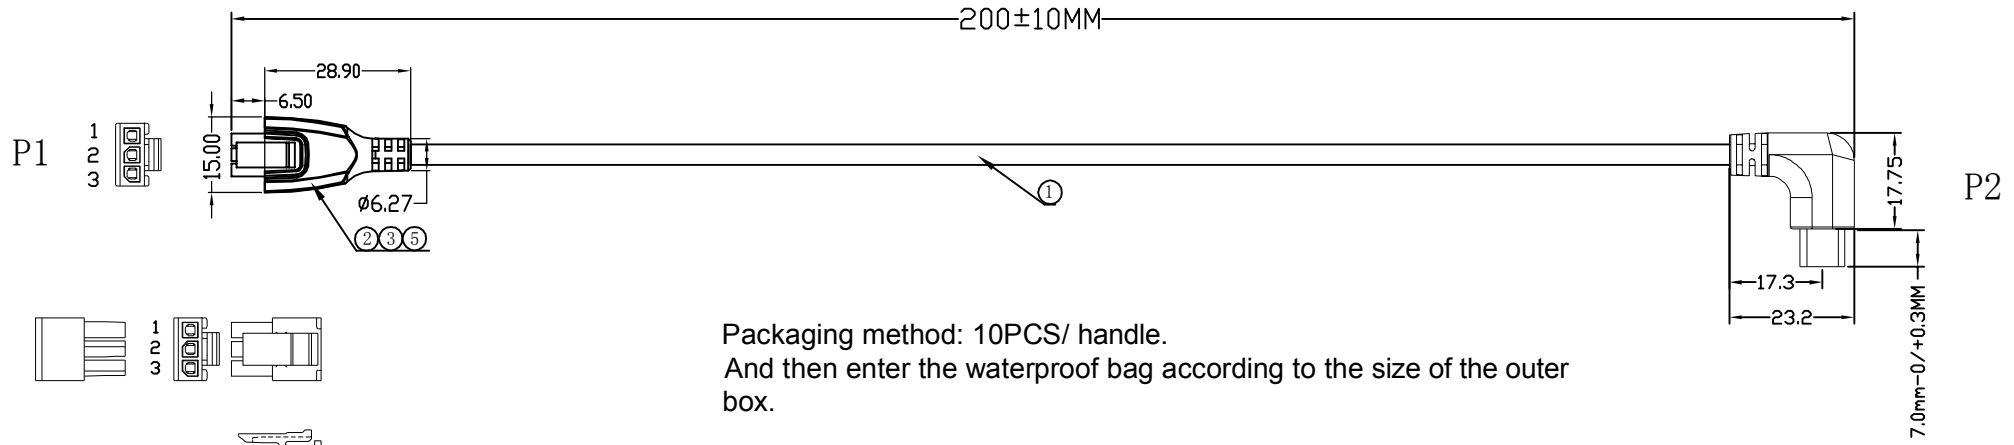


Packaging method: 10PCS/ handle.  
And then enter the waterproof bag according to the size of the outer box.

PIN OUT:

P1	P2
2-----	A4+B4+A9+B9(WHITE)
3-----	A5
1-----	A1+A12+B1+B12(BLAK-GND)
1-----	SHELL(WHITE)

SHELL NOT SHORTED TO GND

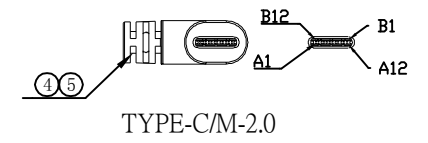

- ELECTRONIC TEST:
- 100% TEST, (Open, Short, Miss Wire).
  - Contact Resistance: 10Ω/max.
  - Insulation Resistance: 5MΩ/min.
  - Hi-Pot: 300v dc/10ms.
  - Electric current over 3A.

PART LIST: A11" ROHS" Compliant , All Materials are Equivalent .

5	PVC	45P WHITE PVC OUTER MOULD MATERIAL.		g
4	JUNCTOR	USB2.0 TYPE C MALE CONTACT. SHELL NICKEL PLATED G/F. INSULATOR BLACK.	1	PCS
3	HOUSING	MICRO-FIT 3.0-3P MALE HOUSING BLACK. (Connectors are by AUK)	1	PCS
2	TERMINAL	MICRO FIT FEMALE TERMINAL NICKEL PLATED. (Connectors are by AUK)	3	PCS
1	CABLE	NON UL 24AWG*3C OD:3.5mm JACK WHITE.	200	mm
项次	NAME	SPECIFICATION	Qty	Unit

**Seconn International Enterprise Co., Ltd.**

TOLERANCES			PROJECTION	TITLE			
AS DRAWING				Micro Fit 3 Pin Housing to 90 Deg Type C USB 2.0 Male Cable White L: 200mm			
			UNIT				
			mm				
DRAWN	Diana	DATE	2019/08/16	PART NO.	SC-S-1908-1605		
SCALE	NONE	SIZE	A4	SHEET	1/1	REV	A1