




型号	模号
USB AM	
USB AF	

變更內容	變更日期	版本

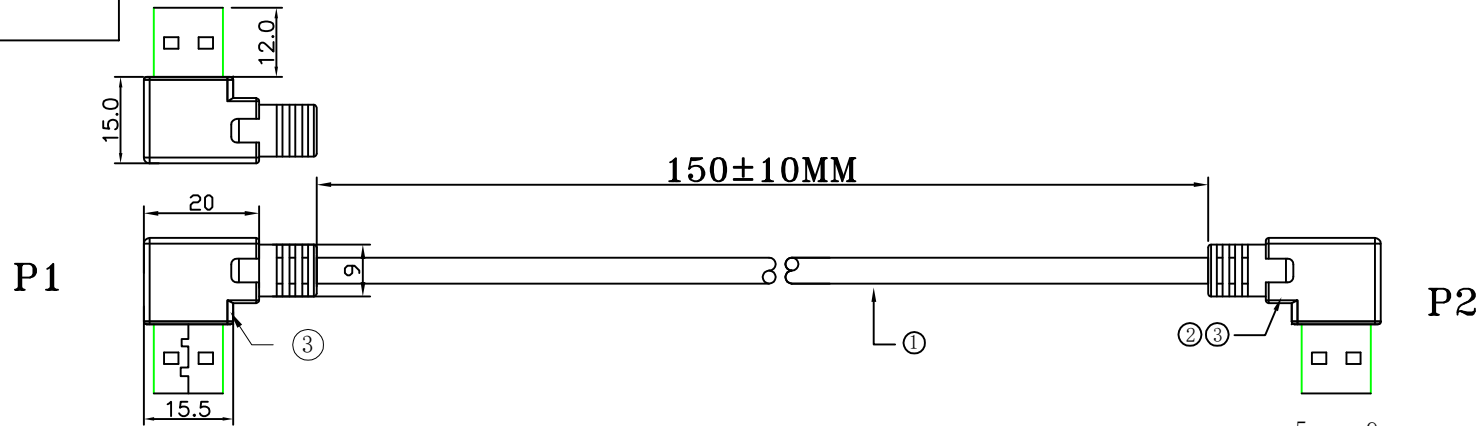

PIN ASSIGNMENT

P1	P2
1	1 RED
2	2 WHITE
3	3 GREEN
4	4 BLACK
5	5 ORANGE
6	6 PURPLE
7	7 GND
8	8 BLUE
9	9 YELLOW
SHELL	SHELL BRAID



PACKING: 20PCS/BUNDLE

NOTE:  
ALL MODEL TOLERANCE  $\pm 0.3\text{mm}$

ELECTRONIC TEST:

- 100% TEST, (Open, Short, Miss Wire).
- Conduct Resistance: 5# /max.
- Insulation Resistance: 10M# /min.
- Hi-Pot: 100v dc/10ms.

PART LIST: ALL "ROHS" COMPLIANT, ALL MATERIALS ARE EQUIVALENT.

ITEM	STANDARD SPECIFICATION	Q' TY	UNIT
3	PVC:45P BLACK.		KG/K
2	USB 3.0 AM TYPE GOLD CONNECTOR, NICKEL PLATED SHELL, PLASTIC: BLUE.	2	SET
1	UL2725 (32#*1P+DAM)*2+32#*1P+24#*2C+AEB OD:4.2 BLACK.		MM

TOLERANCES		PROJECTION		TITLE			
		AS DRAWING		USB 3.0 A Male 90 Deg to A Male 90 Deg Cable			
		UNIT					
		mm					
DRAWN	Tan	DATE	2022/05/21	PART NO.	SC-S-2205-2110		
SCALE	X:1	SIZE	A4	SHEET	1/1	REV	A