


**RoHS COMPLIANT**

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2016/09/09	

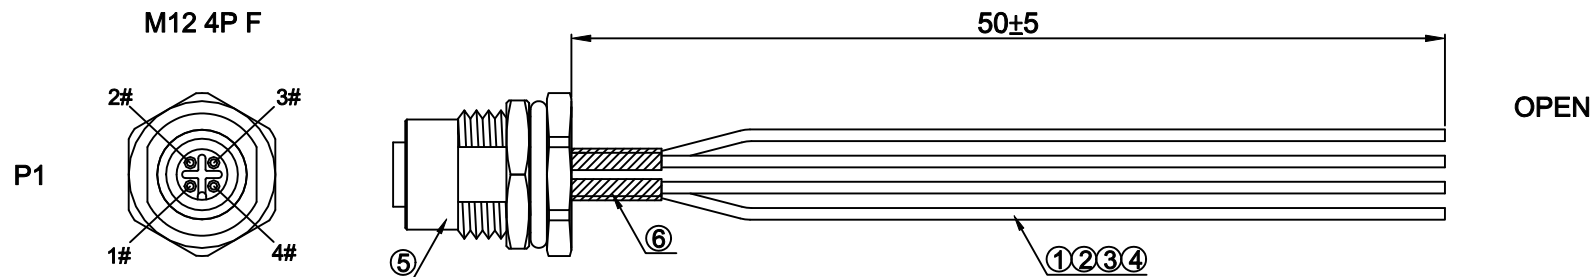

**PIN ASSIGNMENT**

P1	OPEN
1	BLACK
2	WHITE
3	RED
4	GREEN

**NOTES:**

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
  - 100% OPEN, SHORT & MISWIRE TEST,
  - INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.01sec.
  - CONTACT RESISTANCE: 3 ohm MAX.

6	4		BLACK HEAT SHRINK TUBE.
5	1		M12 4P FEMALE BLACK INSULATOR SOLDER TYPE.(WP-04F2-121-11)
4	1	F0109	JUMP WIRE:22AWG GREEN UL1007.
3	1	F0070	JUMP WIRE:22AWG RED UL1007.
2	1	F0116	JUMP WIRE:22AWG WHITE UL1007.
1	1	F0071	JUMP WIRE:22AWG BLACK UL1007.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.	
DRAWN	Deng zhifei	SCALE	FREE	TITLE		
CHECK, BY	Caojiawei	REV	A	M12 4P F/OPEN		
APP, BY	Mr. Huang	DATE	2016/09/09	TOLERANCES		
DWG NO.	SE-S-0276		X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.	M12C-S1204-RFC-50		SHEET	1/1	SIZE	A4