


**RoHS COMPLIANT**

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2013/07/11	

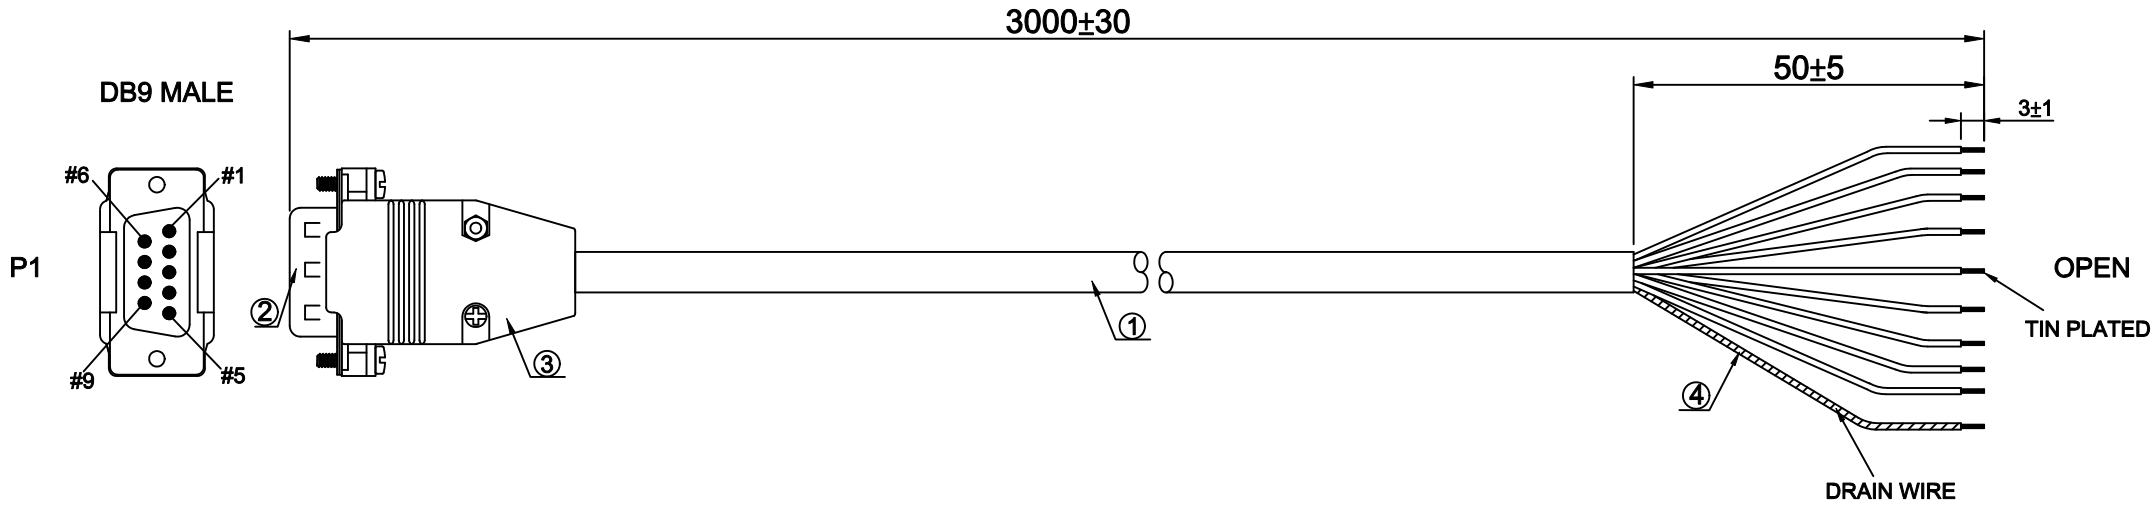

**PIN ASSIGNMENT**

P1	OPEN
1	BLACK
2	BROWN
3	RED
4	ORANGE
5	YELLOW
6	GREEN
7	BLUE
8	VIOLET
9	GRAY
SHELL	DRAIN WIRE

**NOTES:**  
 1. PIN ASSIGNMENT SEE TO WIRE LIST.  
 2. ELECTRICAL TEST CONDITION:  
 (a).100%OPEN,SHORT & MISWIRE TEST,  
 (b). INSULATOR RESISTANCE:20 Mohm MIN.  
 DC 300V 0.01sec.  
 (c). CONTACT RESISTANCE:3 ohm MAX.

ITEM	QTY	PART NUMBER	DESCRIPTION
4	1		BLACK HEAT SHRINK TUBE.
3	1		DB9 SHELL WITH SCREW.
2	1	A0009	DB9 MALE ,SOLDER TYPE ,BLACK INSULATOR.
1	1	E0079	28AWG*9C+D+AM BLACK PVC JACKET OD:5.3MM UL2464.

UNIT	mm	Projection		Seconn International Enterprise Co., Ltd.			
DRAWN	<i>Huang shenggen</i>	SCALE	FREE	TITLE			
CHECK, BY		REV	A	DB9 M TO OPEN			
APP, BY		DATE	2013/07/11	TOLERANCES			
DWG NO.	SE-S-0082-1		X.= ±	.X= ±	.XX= ±	.XXX= ±	
PART NO.	XDSB-SE-S-0082-1-3M		SHEET	1/1	SIZE	A4	