


RoHS COMPLIANT


DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2011/10/18	

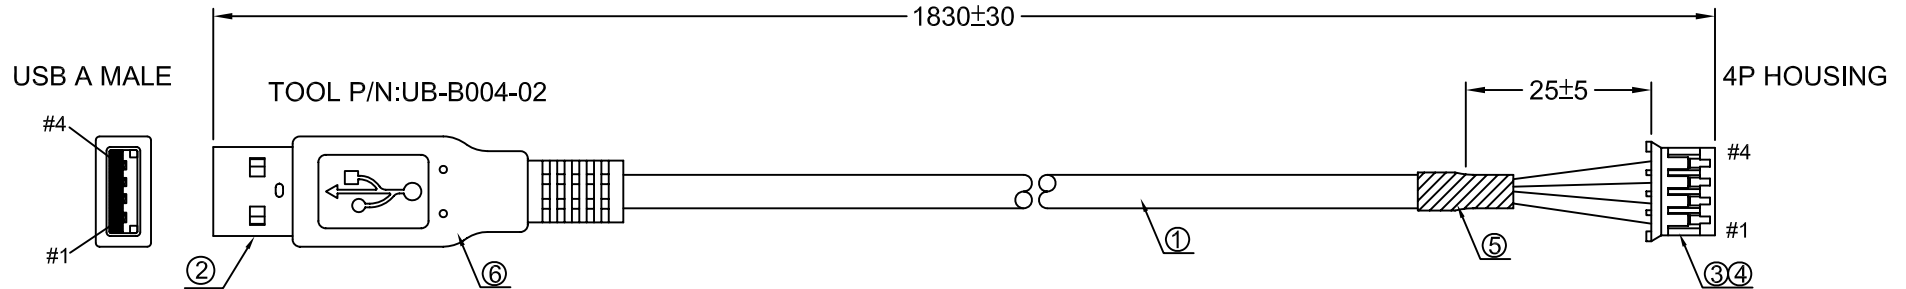

NOTES:

1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
 - (a). 100% OPEN, SHORT & MISWIRE TEST,
 - (b). INSULATOR RESISTANCE: 20 Mohm MIN.
DC 300V 0.01sec,
 - (c). CONTACT RESISTANCE: 3 ohm MAX.

PIN ASSIGNMENT

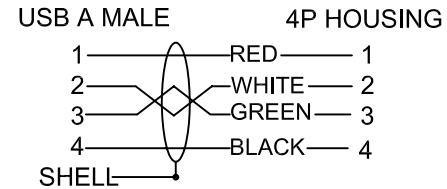

ITEM	QTY	PART NUMBER	DESCRIPTION
6		G0001	USB CONNECTOR OVERMOLD BLACK PVC.
5	1		HEAT SHRINK TUBE:BLACK.
4	4	B0141	TERMINAL:TIN PLATED.
3	1	B0151	HOUSING:PITCH:2.0MM,WHITE.
2	1	A0182	USB A 4P MALE,WHITE INSULATOR,SOLDER TYPE.
1	1	E0329	USB 2.0 28AWG*1PAIR+28AWG*2C+AM+DRAIN +BRAID,OD:3.5MM,BLACK PVC JACKET,UL2725

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.	
DRAWN	<i>Davey</i>	SCALE	1:1	TITLE		
CHECK, BY		REV	A	USB A M/HOUSING		
APP, BY		DATE	2011/10/18	TOLERANCES		
DWG NO.	SE-S-0031		X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.	SE-S-0031-1.83M		SHEET	1/1	SIZE	A4