


**RoHS COMPLIANT**


DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2011/10/18	

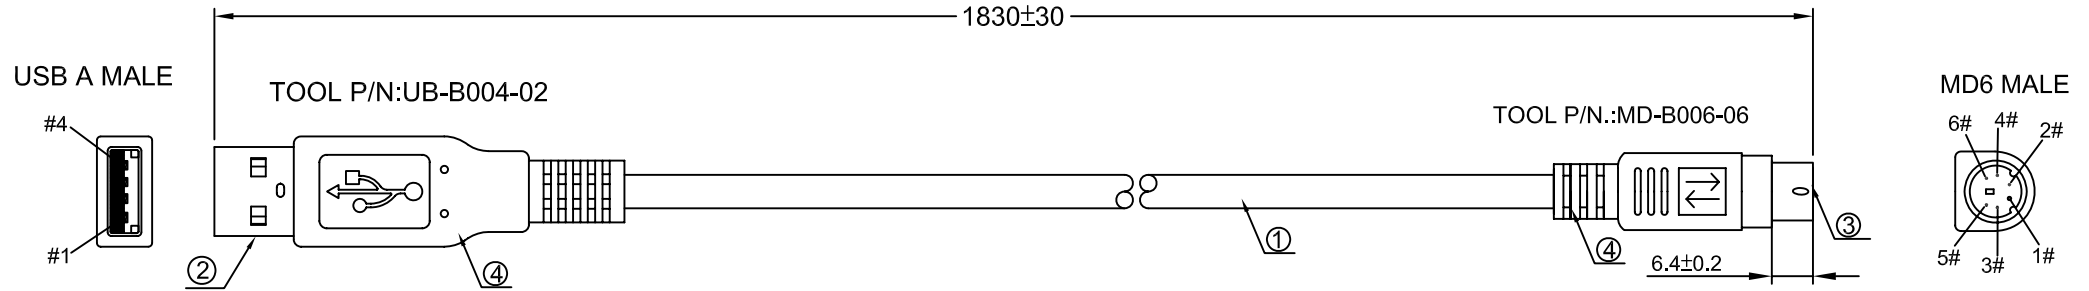

**NOTES:**

1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
  - (a). 100% OPEN, SHORT & MISWIRE TEST,
  - (b). INSULATOR RESISTANCE: 20 Mohm MIN.  
DC 300V 0.01sec,
  - (c). CONTACT RESISTANCE: 3 ohm MAX.

**PIN ASSIGNMENT**

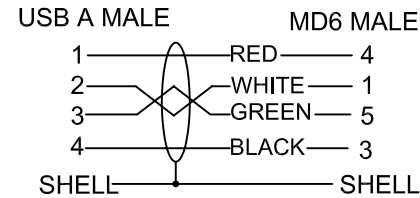

ITEM	QTY	PART NUMBER	DESCRIPTION
4		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
3	1	A0043	MD6 MALE, BLACK INSULATOR, SOLDER TYPE.
2	1	A0182	USB A 4P MALE, WHITE INSULATOR, SOLDER TYPE.
1	1	E0329	USB 2.0 28AWG*1PAIR+28AWG*2C+AM+DRAIN +BRAID, OD:3.5MM, BLACK PVC JACKET, UL2725

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.	
DRAWN	<i>Davey</i>	SCALE	1:1	TITLE		
CHECK, BY		REV	A	USB A M TO PS/2		
APP, BY		DATE	2011/10/18	TOLERANCES		
DWG NO.	SE-S-0032		X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.	SE-S-0032-1.83M		SHEET	1/1	SIZE	A4