

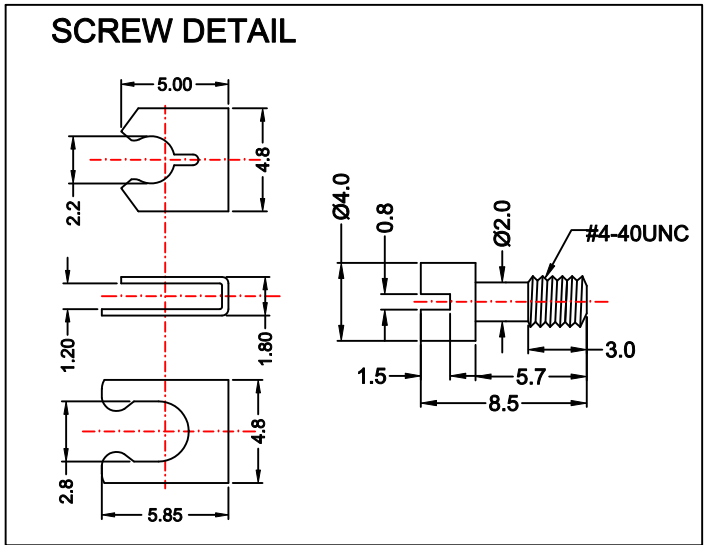


RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2013/11/20	

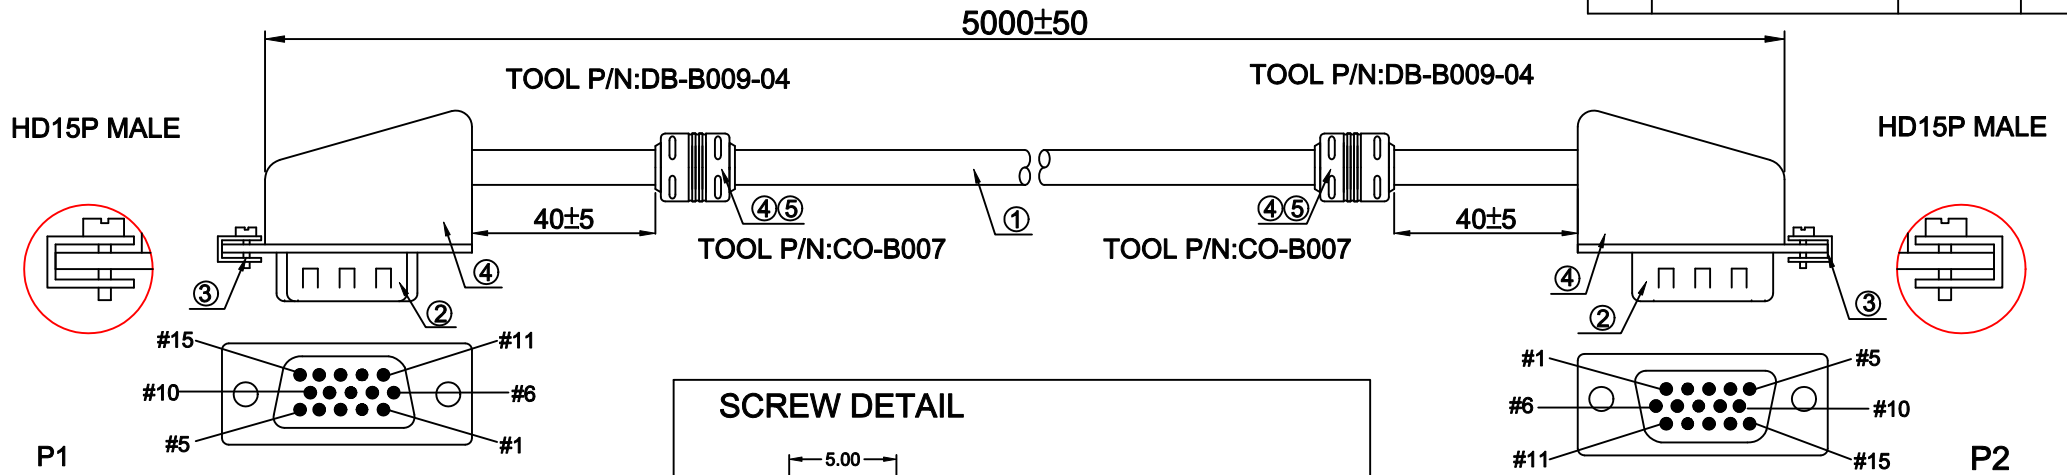

PIN ASSIGNMENT

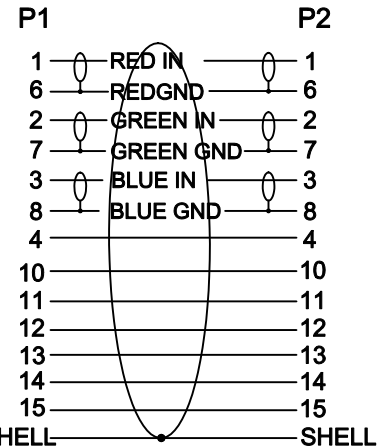

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100% OPEN, SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.03 sec,
 - CONTACT RESISTANCE: 3 ohm MAX.

ITEM	QTY	PART NUMBER	DESCRIPTION
5	2	T0021	CORE:12*12.7*6.5MM.
4		G0001	ALL CONNECTORS OVERMOLD BLACK PVC
3	2	C0145/C0146	SCREW:#4-40UNC 4.0*8.5MM NICKEL PLATED
2	2	A0022	HD15P MALE, BLACK INSULATOR, SOLDER TYPE.
1	1	E0052	32AWG*3COAX(S)+30AWG*7C+AM+B BLACK PVC JACKET OD:4.6MM UL20276.

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.
DRAWN	<i>Huang shenggen</i>	SCALE	1:1		
CHECK, BY		REV	A	10 DEGREE VGA M/M	
APP, BY		DATE	2013/11/20		
DWG NO.	SE-S-0093		X= ±	.X=	
PART NO.	10 DEGREE VGA M/M-5M		SHEET	1/1	