




RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2011/06/07	

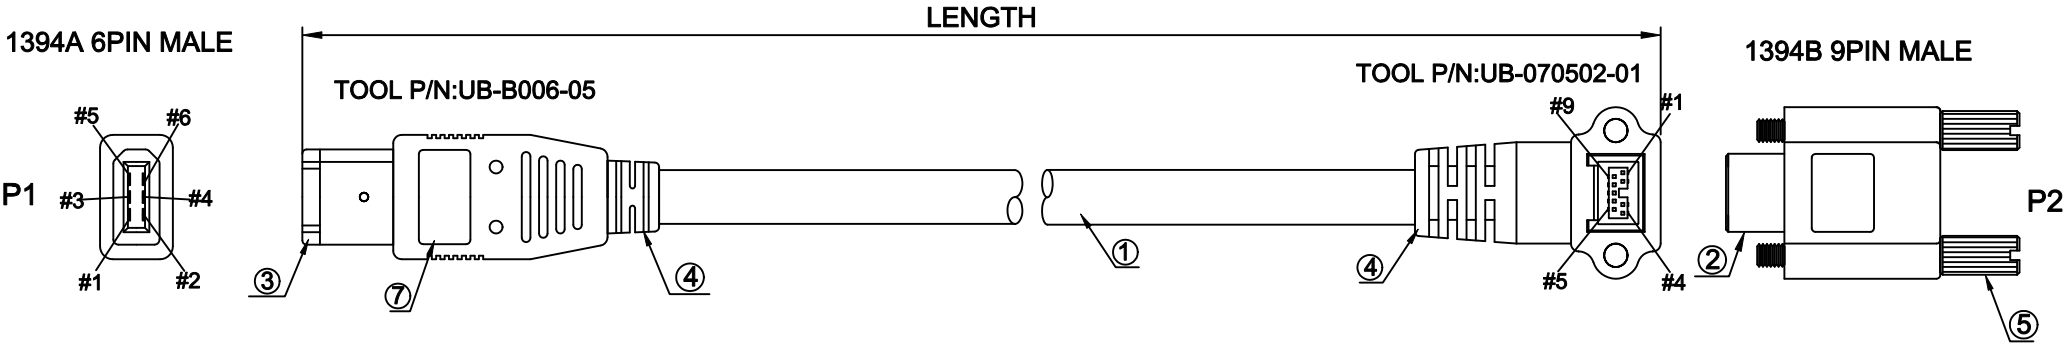

- NOTES:
- 1. PIN ASSIGNMENT SEE TO WIRE LIST.
 - 2. ELECTRICAL TEST CONDITION:
 - (a).100%OPEN,SHORT & MISWIRE TEST,
 - (b). INSULATOR RESISTANCE:20 Mohm MIN.
DC 300V 0.03sec.
 - (c). CONTACT RESISTANCE:3ohm MAX.

5	2	C0317	SCREW:M3*0.5 5.0*35.5MM,NICKEL PLATED.
4		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
3	1	A0286	1394A 6P MALE,BLACK INSULATOR,SOLDER TYPE.
2	1	A0566	1394B 9P MALE,BLACK INSULATOR,SOLDER TYPE.
1	1	E0763 H7306BL	(26AWG*1PAIR+2*DRAIN+CU-PT+MYLAR)*2PCS+ 22AWG*2C]+M+AM+BRAID OD:6.9MM BLACK PVC JACKET UL20276
ITEM	QTY	PART NUMBER	DESCRIPTION

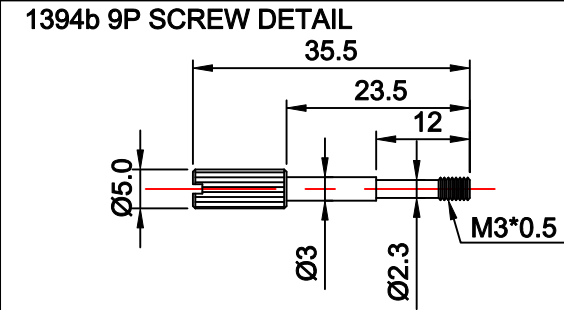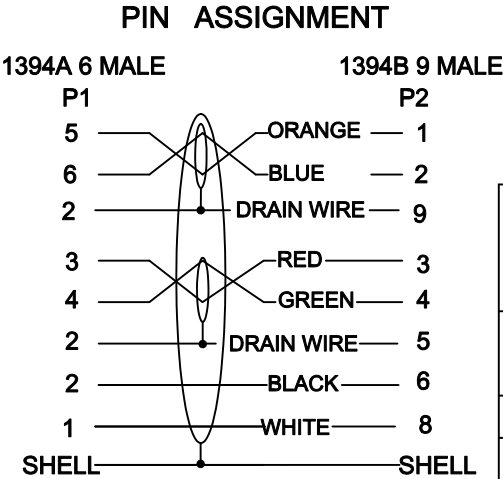

Seconn International Enterprise Co., Ltd.

	REV.	PART NO: SE-S-0004		
	A	IEEE1394A 6 Pin Male to IEEE1394B 9 Pin Male 90 degree Screw Type Cable UL20276		
DRAW,BY: WU SHI JIE		CUSTOMER P/N:		
CHECK,BY:		SCALE	UNIT	SHEET
APP,BY:		FREE	mm	1/1