


RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2012/10/08	
B	CHANGE PLUG	2012/10/18	
C	CHANGE SCREW	2012/11/13	

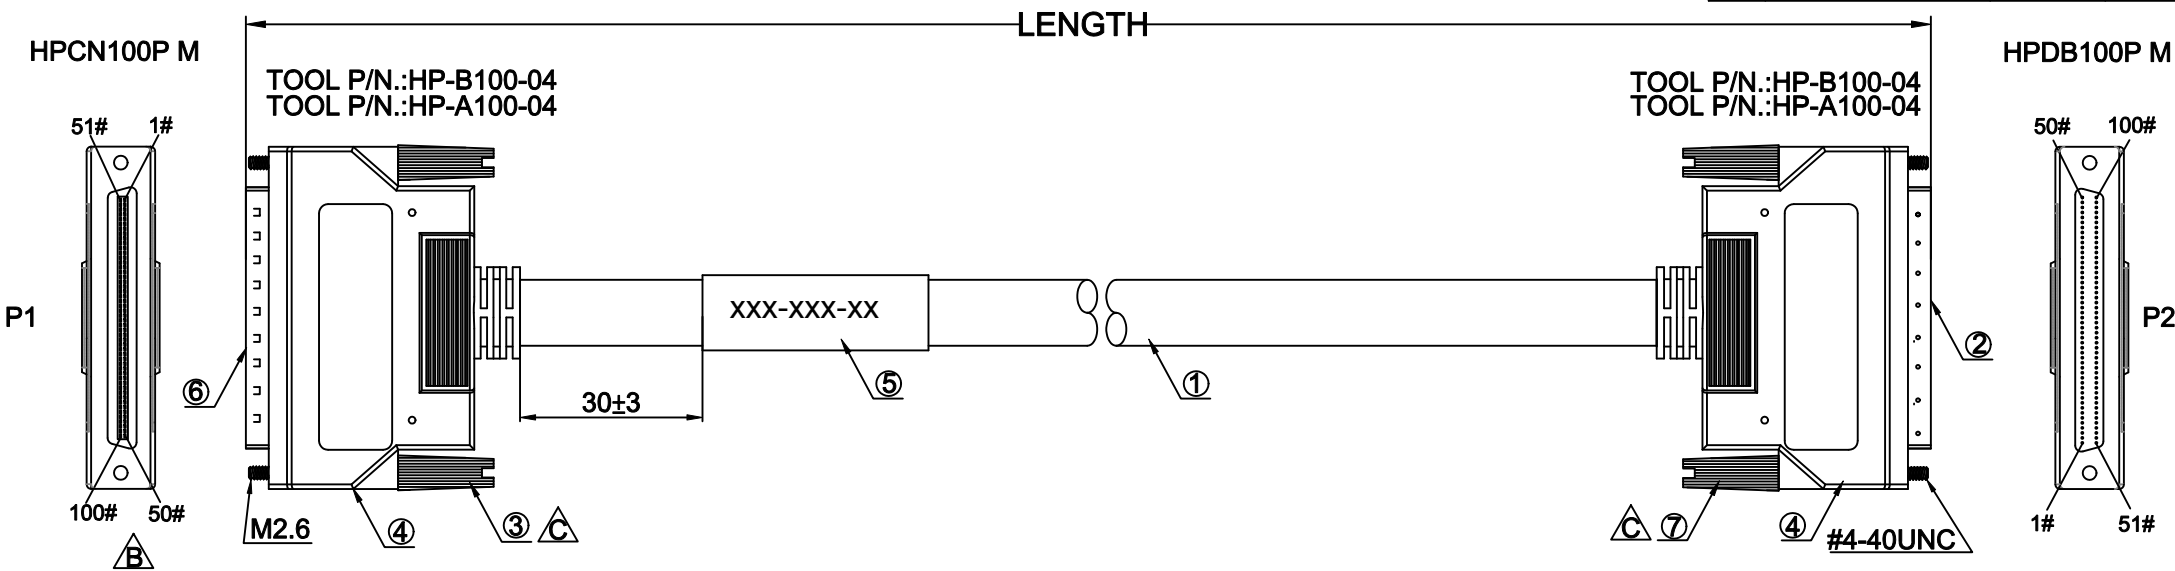

- NOTES:
- PIN ASSIGNMENT SEE TO WIRE LIST.
 - ELECTRICAL TEST CONDITION:
 - 100%OPEN,SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE:20 Mohm MIN.
DC 300V 0.01~0.08sec.
 - CONTACT RESISTANCE:3~5 ohm MAX.

7	2		SCREW:#4-40UNC E32.0 BLACK ABS NICKEL PLATED.
6	1	A0277	HPCN100P MALE BLACK INSULATOR I.D.C TYPE.
5	1		LABEL.
4		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
3	2		SCREW:M2.6 E32.0 BLACK ABS NICKEL PLATED.
2	1	A0187	HPDB100P MALE BLACK INSULATOR I.D.C TYPE.
1	1	E0566 D5499D	28AWG*50P+ADB OD:10.4MM BLACK PVC JACKET UL2990.
ITEM	QTY	PART NUMBER	DESCRIPTION

Seconn International Enterprise Co., Ltd.

	REV.	PART NO: SE-S-1090		
	C	SCSI HPCN100 Pin Male to HPDB100 Pin Male UL2990 Cable		
DRAW,BY: <i>Yi jialu</i>		CUSTOMER P/N:		
CHECK,BY:		SCALE	UNIT	SHEET
APP,BY:		FREE	mm	1/2

