

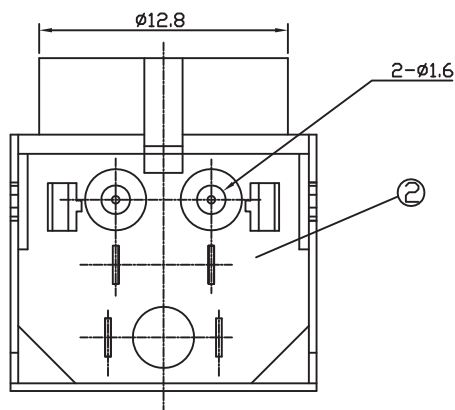
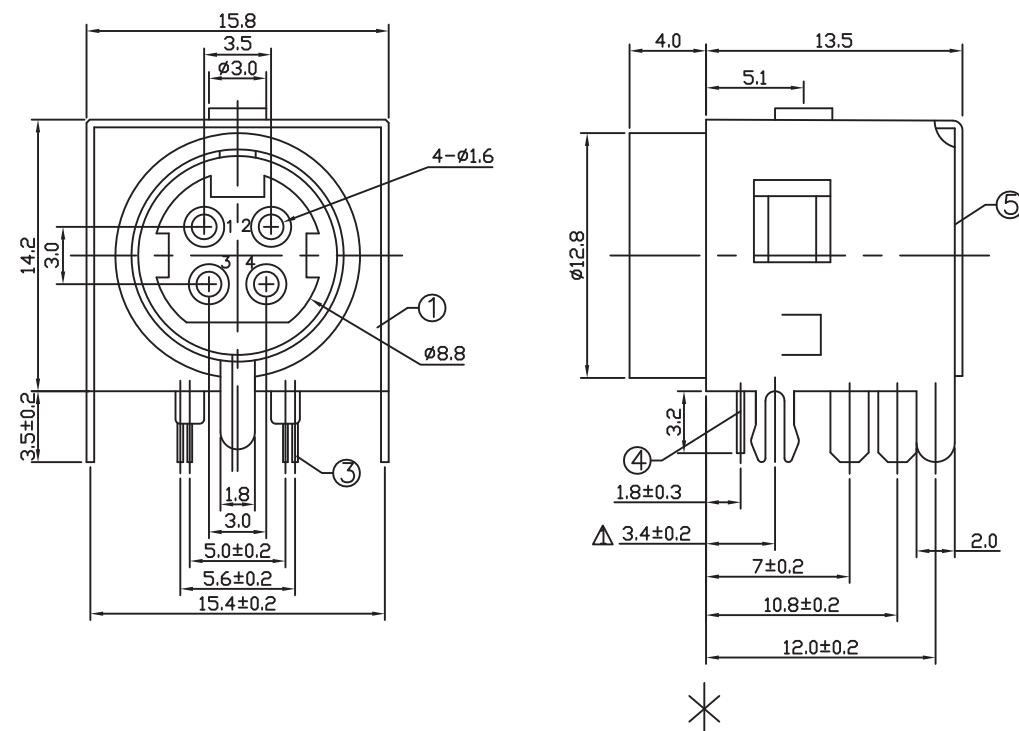


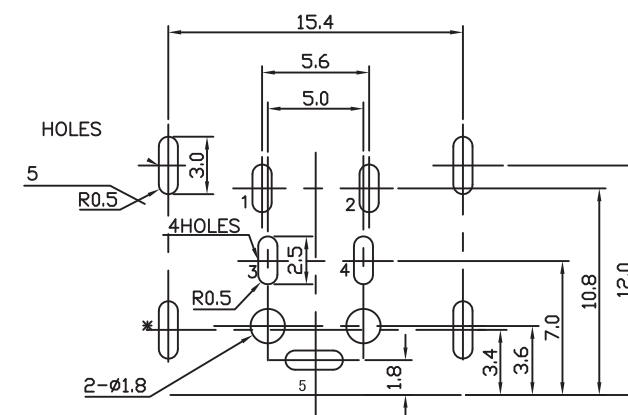

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

* REVISIONS				
LTR	DESCRIPTION	DATE	REVISED	APPROVED
Δ	修改尺寸符合現品	2008.10.14	ANJOU	GIEVEN

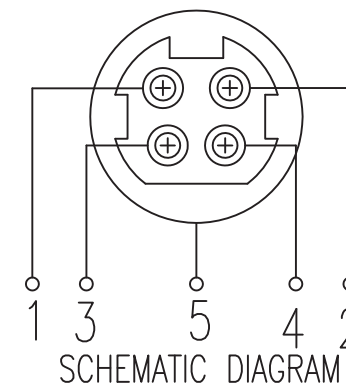

T:1.6 Dimensions of PC board holes

Tolerance : ± 0.1 (Printed-Top view)

LEAD FREE

5	COAT	1	SPCC	t=0.4	MB:Cu	Cu/Sn	PLATED
4	GROUND CONTACT	1	C2680	t=0.4	MB:Cu	Cu/Sn	PLATED
3	TERMINAL	4	C2680	t=0.3	MB:Ni	Ag	PLATED
2	COVER	1	PBT 4815		UL-94V0(BLACK)		
1	HOUSING	1	PBT 4815		UL-94V0(BLACK)		
LTR	PART NAME	QTY	MATERIAL		REMARK		

UNIT	mm	Projection		Seconn International Enterprise Co., Ltd.			
TOLERANCES				TITLE			
x. = ± ---- x.° ± ----°				Power Jack Connector Quick Lock Type			
x.x = ± ---- x.x° ± ----°							
x.xx = ± ---- .xx° ± ----°							
x.xxx = ± ---- .xxx° ± ----°							
DRAWN	ANJOU	DATE	2008/10/14	PART NO.	JAKS-S09038-4		
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	A