


RoHS COMPLIANT

DESCRIPTION CONTROL


REV	DESC	DATE	APP
A	FIRST RELEASE	2014/05/19	

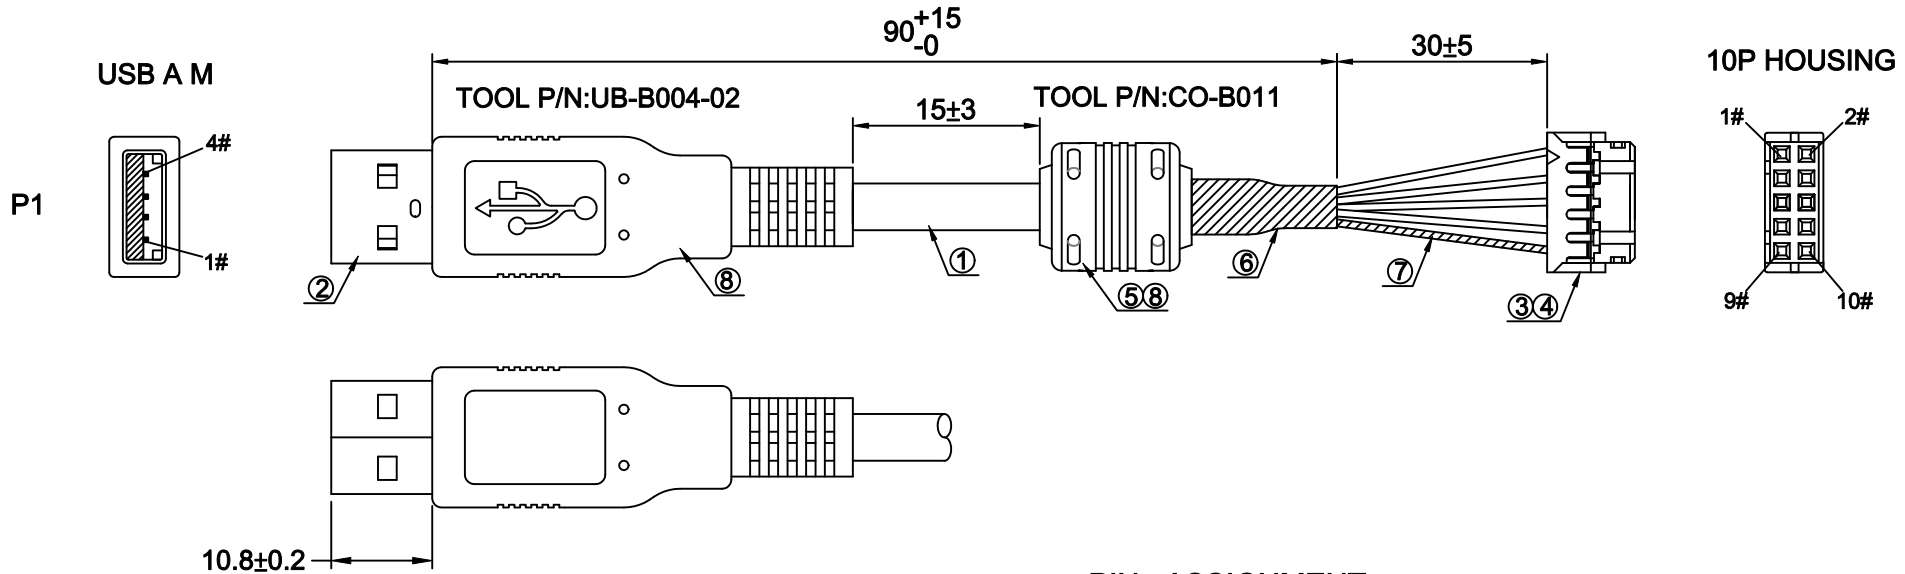

NOTES:

1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
 - (a). 100% OPEN, SHORT & MISWIRE TEST,
 - (b). INSULATOR RESISTANCE: 20 Mohm MIN.
DC 300V 0.01sec.
 - (c). CONTACT RESISTANCE: 1ohm MAX.

PIN ASSIGNMENT

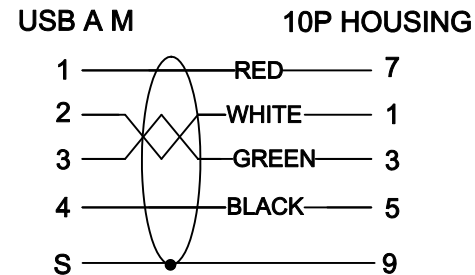

ITEM	QTY	PART NUMBER	DESCRIPTION
8		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
7	1		TRANSPARENT HEAT SHRINK TUBE.
6	1		BLACK HEAT SHRINK TUBE.
5	1	T0021	CORE:12*12.7*6.0MM.
4	5		TERMINAL:PITCH2.0MM.(SPHD-002T-P0.5)
3	1		HOUSING:2*5P PITCH2.0MM.(PHDR-10VS)
2	1	A0182	USB A TYPE MALE, SOLDER TYPE, WHITE INSULATOR, CONTACT GOLD PLATED 30U".
1	1	E0843	28AWG*1PAIR+24AWG*2C+ADB OD:4.5MM BLACK JACKET UL2725.

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.		
DRAWN	Deng zhifei	SCALE	FREE	TITLE			
CHECK, BY	CAO JIA WEI	REV	A	USB A M/10 P HOUSING			
APP, BY	Mr, Huang	DATE	2014/05/19	TOLERANCES			
DWG NO.	SE-S-0126			X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.	Opp2013-095-01			SHEET	1/1	SIZE	A4