
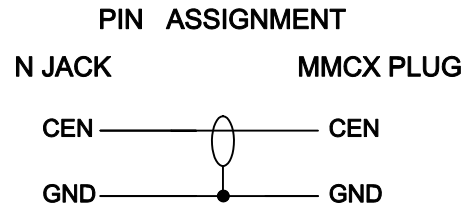


RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2014/07/28	

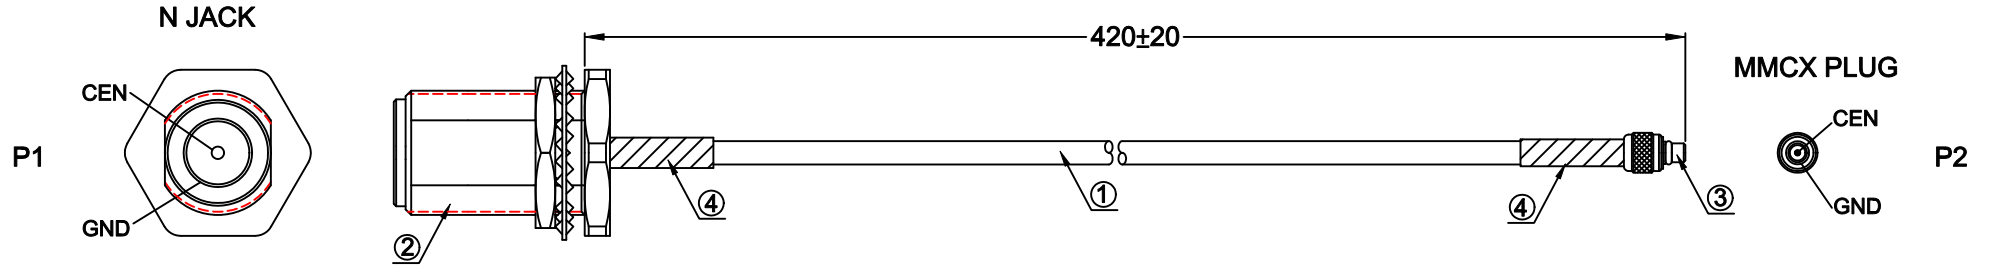

NOTES:

1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
 - (a).100%OPEN,SHORT & MISWIRE TEST,
 - (b). INSULATOR RESISTANCE:20 Mohm MIN.
DC 300V 0.01sec.
 - (c). CONTACT RESISTANCE:1ohm MAX.

4	2		BLACK HEAT SHRINK TUBE.
3	1	SECONN TC1402J-TBGG/6/	MMCX PLUG CRIMP TYPE FOR RG316D.
2	1	SECONN TC-321J-TBGN/2/2/	N JACK B/H CRIMP TYPE FOR RG316D.
1	1	SUIRONG 50051.011	RG-316D COAXIAL CABLE OD:3.0MM TRANSPARENT BROWN JACKET.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.			
DRAWN	Deng zhifei	SCALE	FREE	TITLE				
CHECK, BY		REV	A	N JACK/MMCX PLUG				
APP, BY		DATE	2014/07/28	TOLERANCES				
DWG NO.	SE-S-0145			X.= ±	.X= ±	.XX= ±	.XXX= ±	
PART NO.	N-MMCX-MU-W4			SHEET	1/1	SIZE	A4	