



**RoHS COMPLIANT**

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2014/08/27	

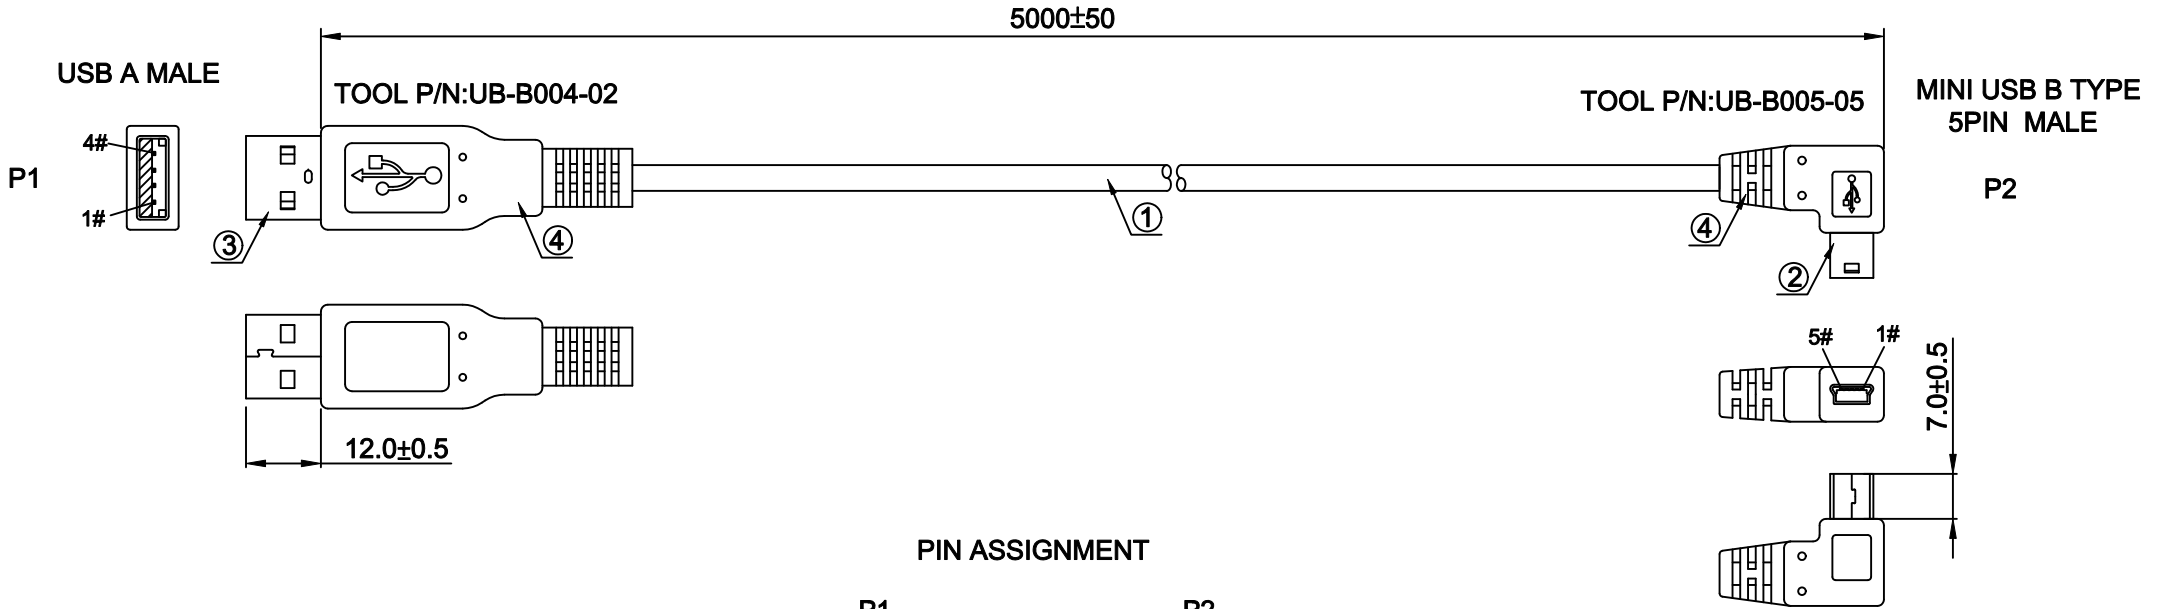

**PIN ASSIGNMENT**

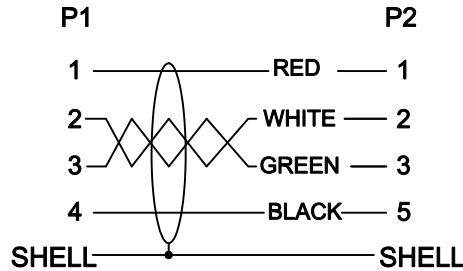

**NOTES:**

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
  - 100% OPEN, SHORT & MISWIRE TEST,
  - INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.03sec.
  - CONTACT RESISTANCE: 3ohm MAX.

4		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
3	1	A0182-1	USB A TYPE, MALE, WHITE INSULATOR, SOLDER TYPE.
2	1	A0582	MINI USB B 5Pin MALE, BLACK INSULATOR.
1	1	E0329 H16904G	28AWG*1P+28AWG*2C+A+D+B OD:3.5MM UL2725 BLACK PVC JACKET.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.
DRAWN	Deng zhifai	SCALE	FREE	TITLE	
CHECK, BY		REV	A	USB A M/MINIUSB 5P M	
APP, BY		DATE	2014/08/27	TOLERANCES	
DWG NO.	SE-S-0147			X.= ±	.X= ±
PART NO.	UB2001021L06000			.XX= ±	.XXX= ±
	SHEET	1/1	SIZE	A4	