


RoHS COMPLIANT


DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2014/11/21	

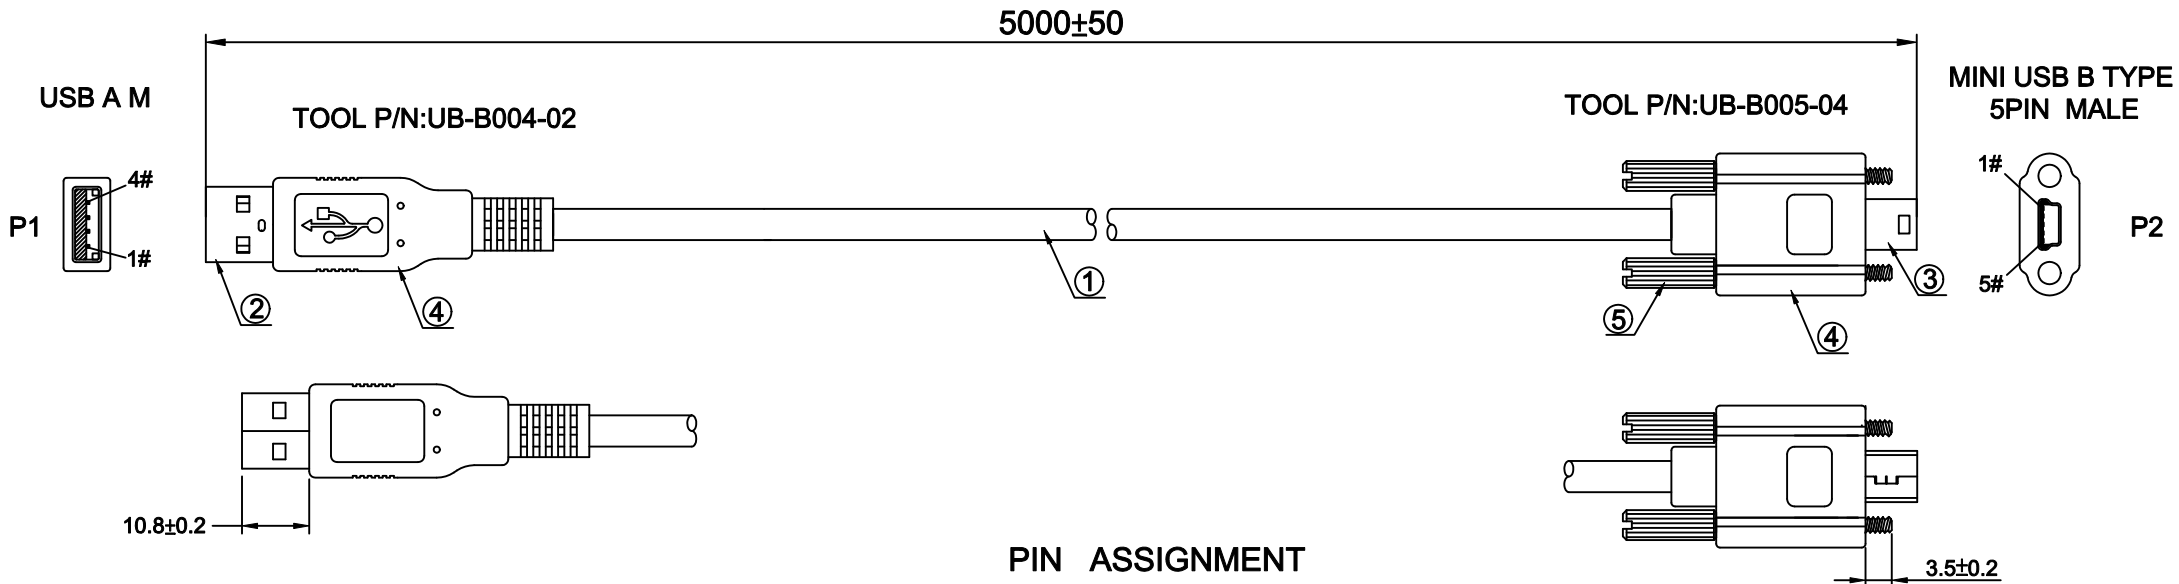


NOTES:

1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
 - (a). 100% OPEN, SHORT & MISWIRE TEST,
 - (b). INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.03sec.
 - (c). CONTACT RESISTANCE: 3ohm MAX.

PIN ASSIGNMENT

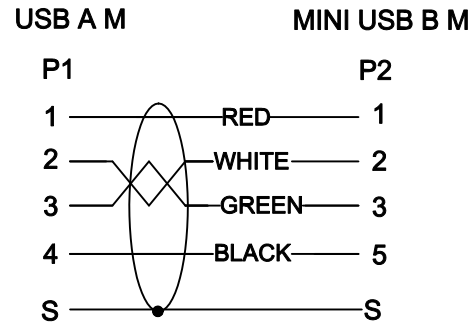

SCREW DETAIL:

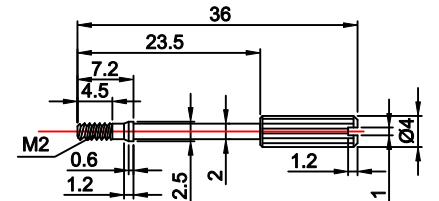

ITEM	QTY	PART NUMBER	DESCRIPTION
5	2	C0354	SCREW:M2 4.0*36MM METAL SCREW NICKEL PLATED.
4		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
3	1	A0197-1	MINI USB B TYPE 5Pin MALE, SOLDER TYPE, BLACK INSULATOR CONTACT GOLD PLATED 30U".
2	1	A0182	USB A TYPE MALE, SOLDER TYPE, WHITE INSULATOR, CONTACT GOLD PLATED 30U".
1	1	E0849 H7304R	28AWG*1PAIR+26AWG*2C+AM+SP+FPP, OD:4.5mm BLACK PVC JACKET UL20276.

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.
DRAWN	Deng zhifei	SCALE	FREE	TITLE	
CHECK, BY	Cao jiawei	REV	A	USB A M/MINIUSB 5P M	
APP, BY	Mr. Huang	DATE	2014/11/21	TOLERANCES	
DWG NO.	SE-S-0159	X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.	SE-S-0159-5M	SHEET	1/1	SIZE	A4