

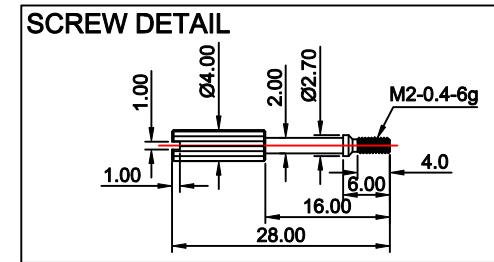


RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2014/11/21	

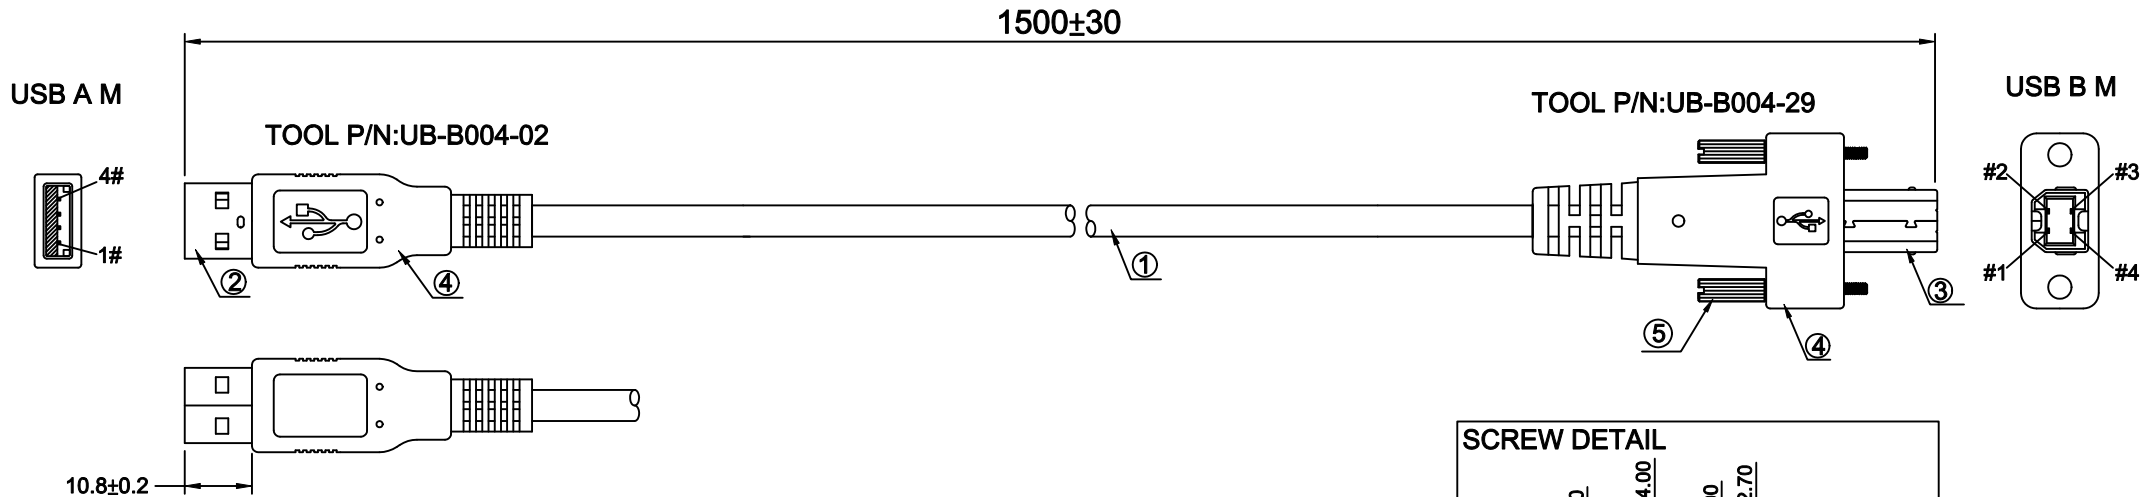

PIN ASSIGNMENT

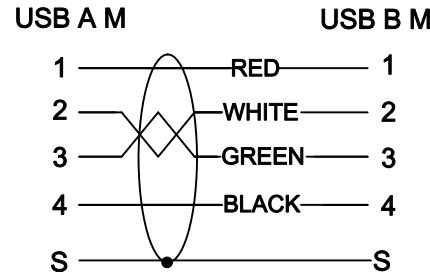

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100% OPEN, SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.01sec.
 - CONTACT RESISTANCE: 3ohm MAX.

5	2	C0371	SCREW:M2-0.4-6g 4.0*28MM,NICKEL PLATED.
4		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
3	1	A0190	USB B TYPE MALE, SOLDER TYPE, WHITE INSULATOR, CONTACT GOLD PLATED 30U".
2	1	A0182	USB A TYPE MALE, SOLDER TYPE, WHITE INSULATOR, CONTACT GOLD PLATED 30U".
1	1	E0849 H7304R	28AWG*1PAIR+26AWG*2C+AM+SP+FPP, OD:4.5mm BLACK PVC JACKET UL20276.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.			
DRAWN	<i>Deng zhifei</i>	SCALE	FREE	TITLE				
CHECK, BY	<i>Cao jiawei</i>	REV	A	USB A M/USB B M				
APP, BY	<i>Mr. Huang</i>	DATE	2014/11/21	TOLERANCES				
DWG NO.	SE-S-0160			X.= ±	.X= ±	.XX= ±	.XXX= ±	
PART NO.	SE-S-0160-1.5M			SHEET	1/1	SIZE	A4	