


RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2014/05/14	
B	CHANGE DRAWING	2014/06/24	
C	CHANGE DRAWING	2014/12/01	

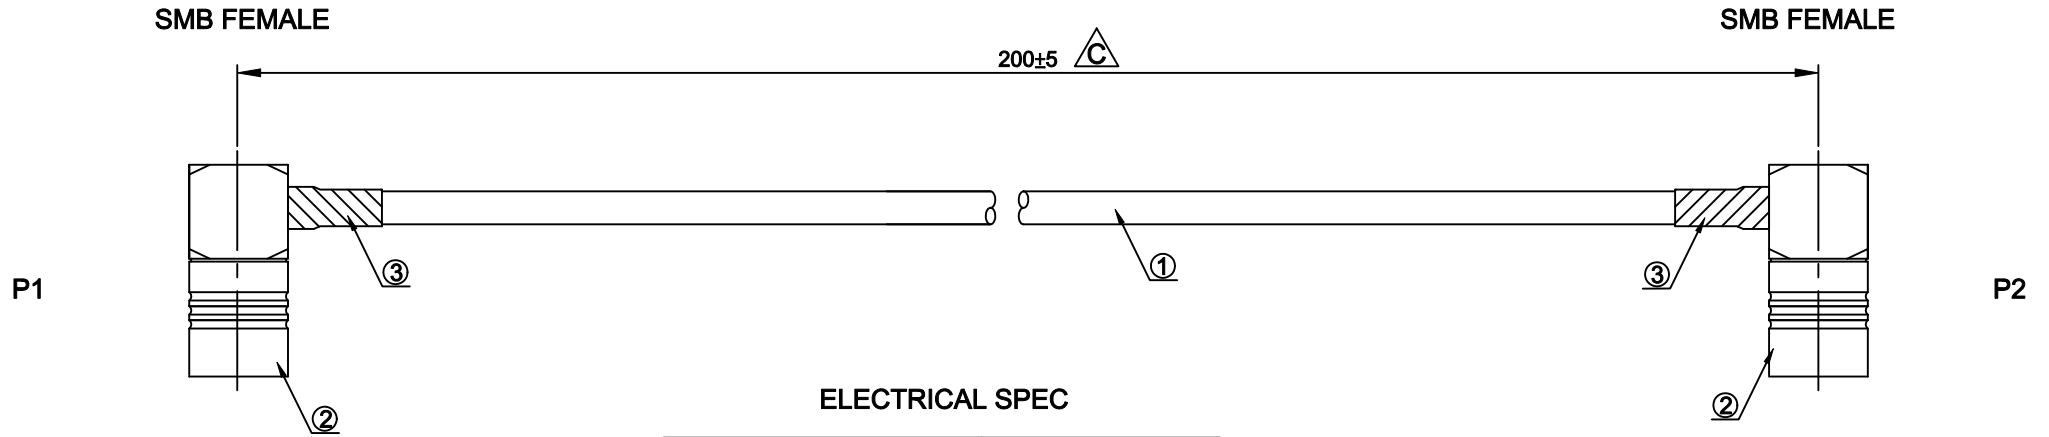


ELECTRICAL SPEC

ITEM	SPEC
IMPEDANCE	50 OHM
FREQUENCY	2300MHz-2700MHz
VSWR	<1.2
HANDR ING POWER	>AVA 20W
VOLTAGE RATING	335V,3SEC
INSULATION RESISTANCE	>1000MG@DC500V
ENVIRONMENT	ROHS COMPLIANT
INSERSION LOSS	MAX 0.4DB

NOTES:
 1. PIN ASSIGNMENT SEE TO WIRE LIST.
 2. ELECTRICAL TEST CONDITION:
 (a).100%OPEN,SHORT & MISWIRE TEST,
 (b). INSULATOR RESISTANCE:20 Mohm MIN.
 DC 300V 0.01sec,
 (c). CONTACT RESISTANCE: 1ohm MAX.
 3.FLAME RETARDANT: V-0.
 4.THE FREQUENCY RANGE: DC-4GHZ. $\triangle B$
 5.THE OPERATING TEMP.: -40C - +85C DEGREE.

PIN ASSIGNMENT

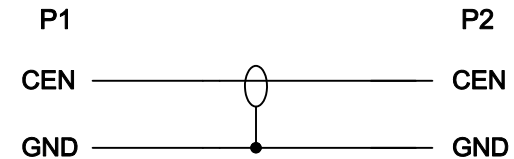

ITEM	QTY	PART NUMBER	DESCRIPTION
3	2		BLACK HEAT SHRINK TUBE.
2	2	CHEN PRECISION TC1203L-TBGG/1/	SMB R/A PLUG.
1	1	SUIRONG 50051.010	RG-405 COAX CABLE BLACK OD:2.5MM.

UNIT	mm	Projection		Seconn International Enterprise Co., Ltd.			
DRAWN	Deng ghifei	SCALE	FREE	TITLE			
CHECK, BY	Cao jiawei	REV	C	SMB PLUG/PLUG			
APP, BY	Mr. Huang	DATE	2014/05/14	TOLERANCES			
DWG NO.	SE-S-0129			X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.	W4			SHEET	1/1	SIZE	A4