



RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2015/06/16	

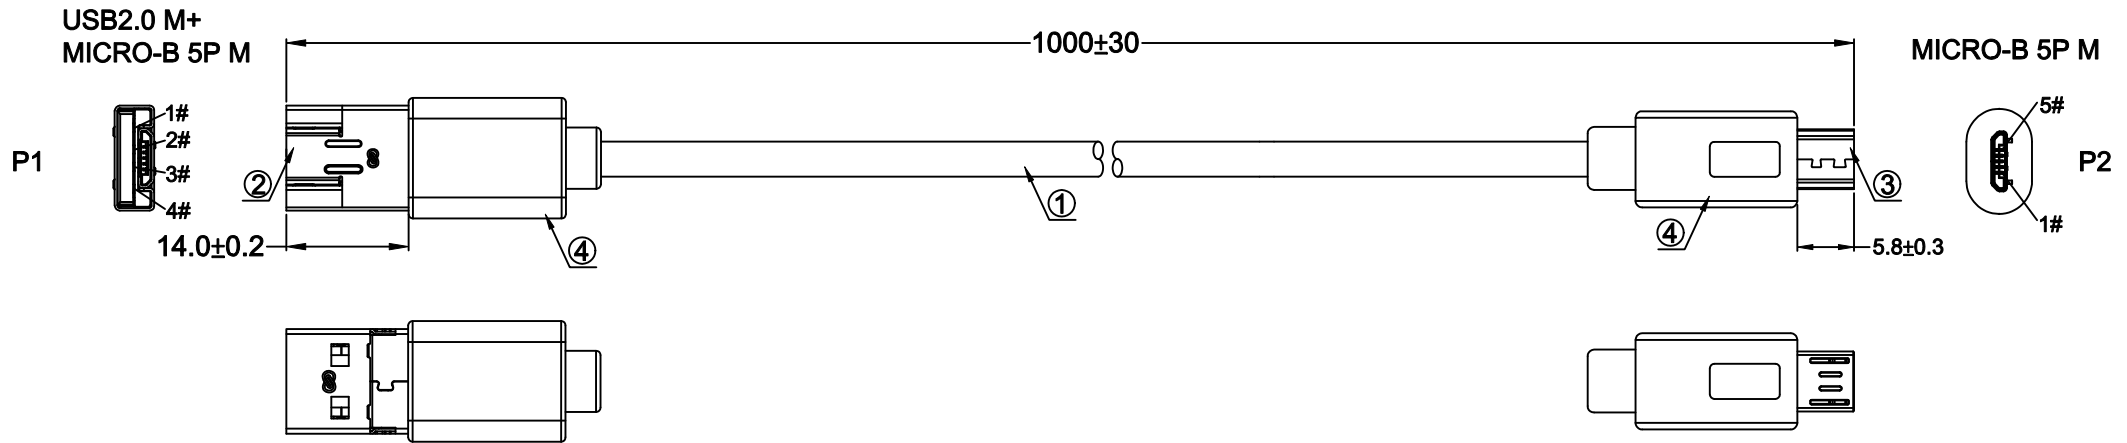

PIN ASSIGNMENT

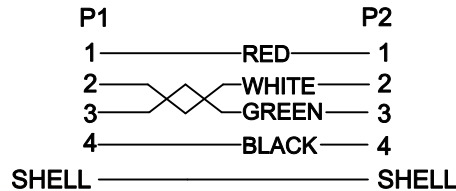

NOTES:
 1. PIN ASSIGNMENT SEE TO WIRE LIST.
 2. ELECTRICAL TEST CONDITION:
 (a).100%OPEN,SHORT & MISWIRE TEST,
 (b). INSULATOR RESISTANCE:10 Mohm MIN.
 DC 300V 0.01sec.
 (c). CONTACT RESISTANCE:2 ohm MAX.

4			ALL CONNECTORS OVERMOLD WHITE PVC.
3	1		CONNECTORS:MICRO-B 5P M BLACK INSULATOR SOLDER TYPE.
2	1		CONNECTORS:USB2.0 M+MICRO-B 5P M BLACK INSULATOR SOLDER TYPE.
1	1		28AWG*1P+24AWG*2C+AL+D+B OD:4.2MM WHITE PVC JACKET UL2725.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.
DRAWN	DENG ZHIFEI	SCALE	FREE	TITLE	
CHECK, BY	CAO JIAWEI	REV	A	USB2.0 M TO MICRO-B M	
APP, BY	MR.HUANG	DATE	2015/06/16	TOLERANCES	
DWG NO.	SE-S-0209			X.= ±	.X= ±
PART NO.				SHEET	1/1
				SIZE	A4