



**RoHS COMPLIANT**

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2015/06/19	

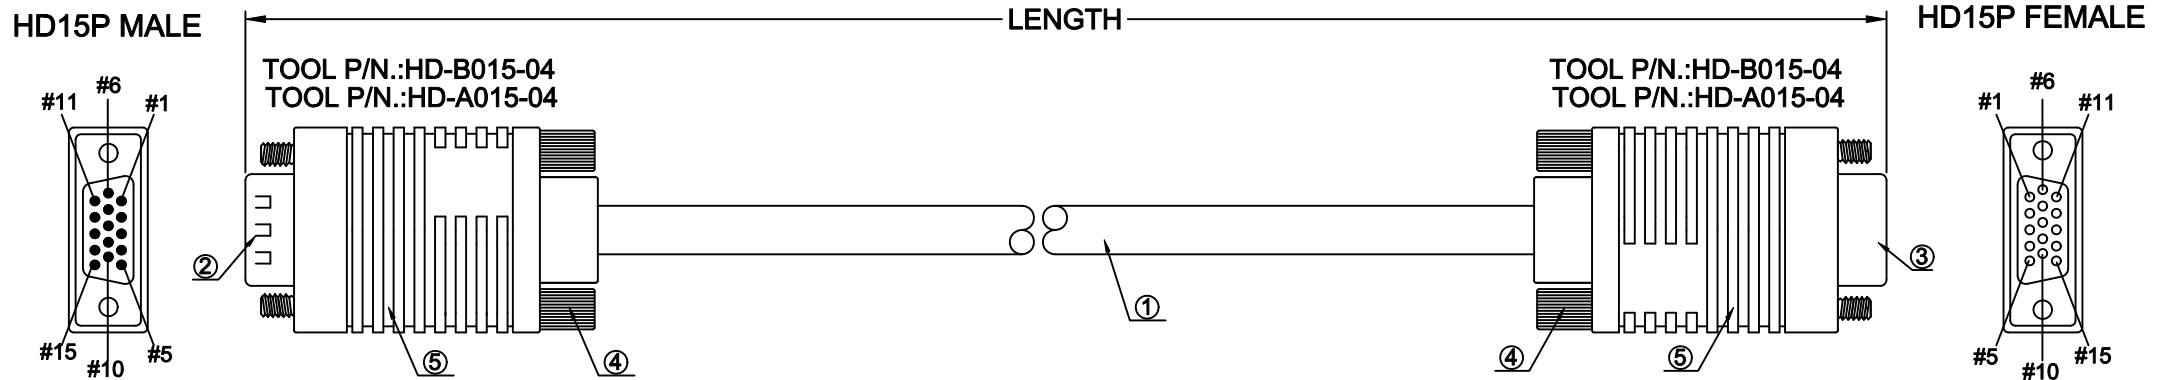

**PIN ASSIGNMENT**

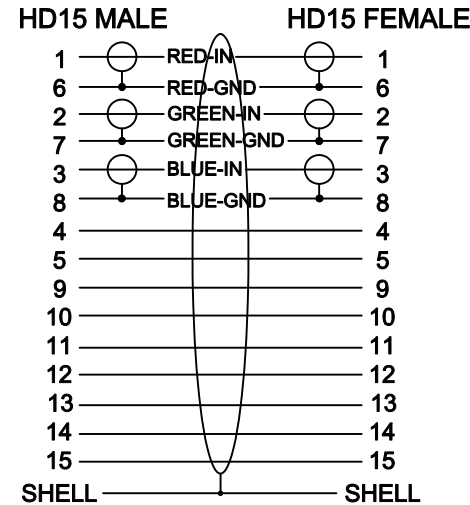

**NOTES:**

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
  - 100% OPEN, SHORT & MISWIRE TEST,
  - INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.01Sec.
  - CONTACT RESISTANCE: 3ohm MAX.

5		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
4	4	C0069	SCREW: #4-40UNC T40 BLACK ABS.
3	1	A0023	HD15 FEMALE, BLACK INSULATOR, SOLDER TYPE.
2	1	A0022	HD15 MALE, BLACK INSULATOR, SOLDER TYPE.
1	1	E0394	(32AWG*3COAX+30AWG*9C)+AM+BRAID, OD:5.0MM, BLACK PVC JACKET, UL20276
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.		
DRAWN	Deng zhifei	SCALE	FREE	TITLE			
CHECK, BY	Bao jiawei	REV	A	HD15 M/HD15 F			
APP, BY	Mr. huang	DATE	2015/06/19	TOLERANCES			
DWG NO.	SE-S-0212			X.= ±	.X.= ±	.XX.= ±	.XXX.= ±
PART NO.				SHEET	1/1	SIZE	A4