



RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2015/05/27	

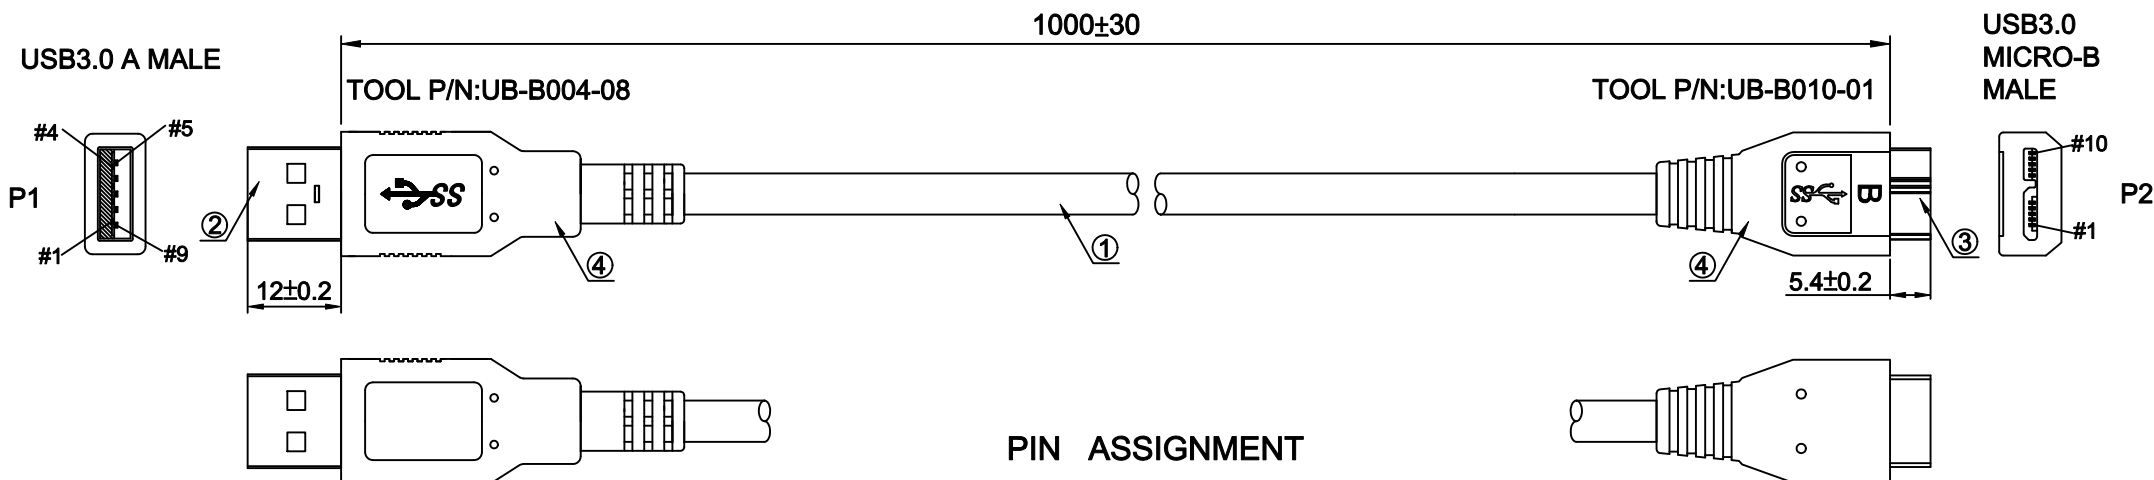

PIN ASSIGNMENT

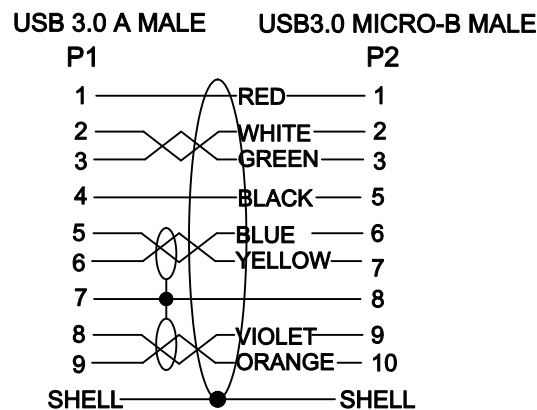

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100% OPEN, SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.01sec.
 - CONTACT RESISTANCE: 3 ohm MAX.

ITEM	QTY	PART NUMBER	DESCRIPTION
4		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
3	1	A0674-1	USB3.0 MICRO-B, MALE, BLUE INSULATOR, SOLDER TYPE.
2	1	A0710	USB 3.0 A , MALE, BLUE INSULATOR, SOLDER TYPE.
1	1	E0894 H1708AD	(28AWG*1P+D+AM+HM)*2PCS+(28AWG*1P+AM)*1PCS+26AWG*2C+F+AB OD:5.5MM UL2725 BLACK PVC JACKET.

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.
DRAWN	Deng zhifei	SCALE	FREE	TITLE	
CHECK, BY	Caojiawei	REV	A	USB 3.0 A MALE/USB3.0 MICRO-B MALE	
APP, BY	Mr. Huang	DATE	2015/05/27	TOLERANCES	
DWG NO.	SE-S-0225			X.= ±	.X= ±
PART NO.				SHEET	1/1
				SIZE	A4