



RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2015/05/20	
B	ADD LENGTH	2015/08/12	
C	CHANGE CABLE LENGTH	2016/01/22	

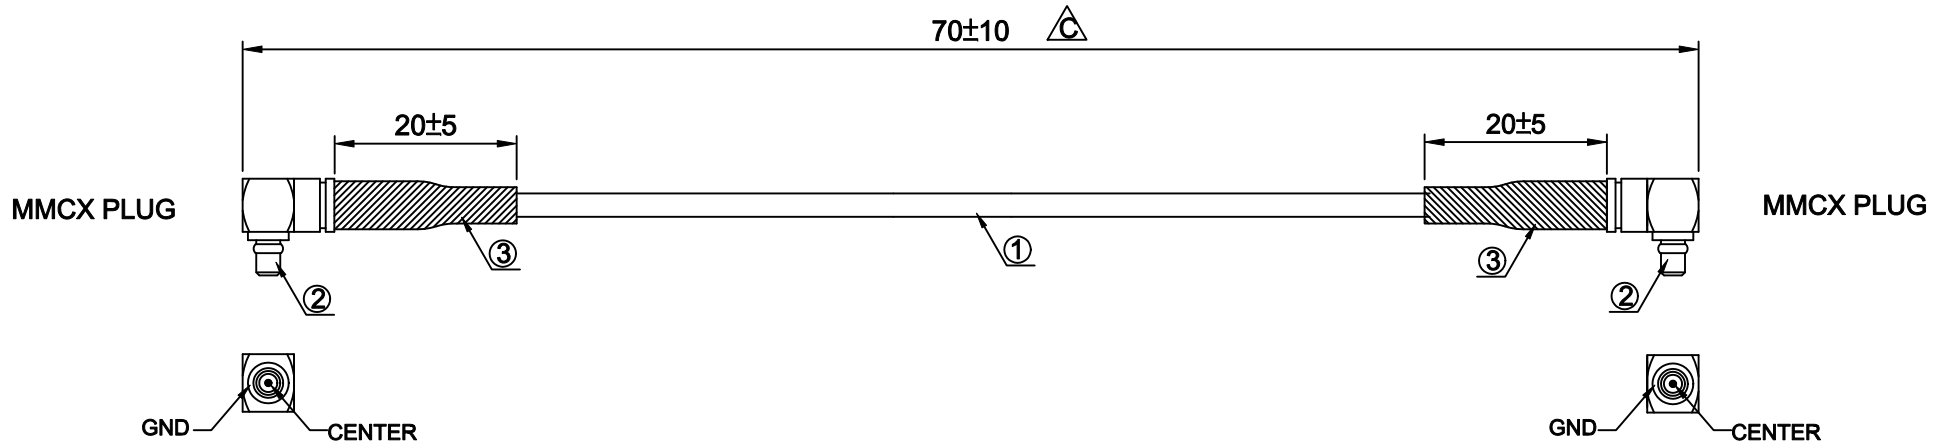

PIN ASSIGNMENT

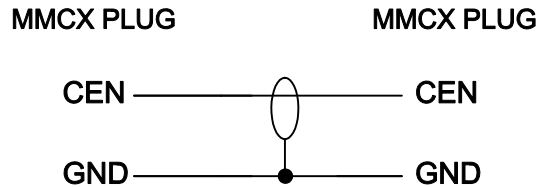

NOTES:

1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
 - (a). 100% OPEN, SHORT & MISWIRE TEST,
 - (b). INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.01sec.
 - (c). CONTACT RESISTANCE: 1ohm MAX.

ITEM	QTY	PART NUMBER	DESCRIPTION
3	2		BLACK HEAT SHRINK TUBE.
2	2		90°MMCX PLUG GOLD PLATED FOR 75Ω.
1	1	E0535	RG-179 30AWG*1C+B OD:3.0MM BLACK PVC JACKET.

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.		
DRAWN	Lu dongfu	SCALE	FREE	TITLE			
CHECK, BY	Bao jiawei	REV	C	90°MMCX PLUG/PLUG			
APP, BY	Mr. huang	DATE	2015/08/12	TOLERANCES			
DWG NO.	SE-S-0191			X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.	SE-S-0191-0.07M		SHEET	1/1	SIZE	A4	