



DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2011/06/20	
B	CHANGE LENGTH	2012/05/10	△

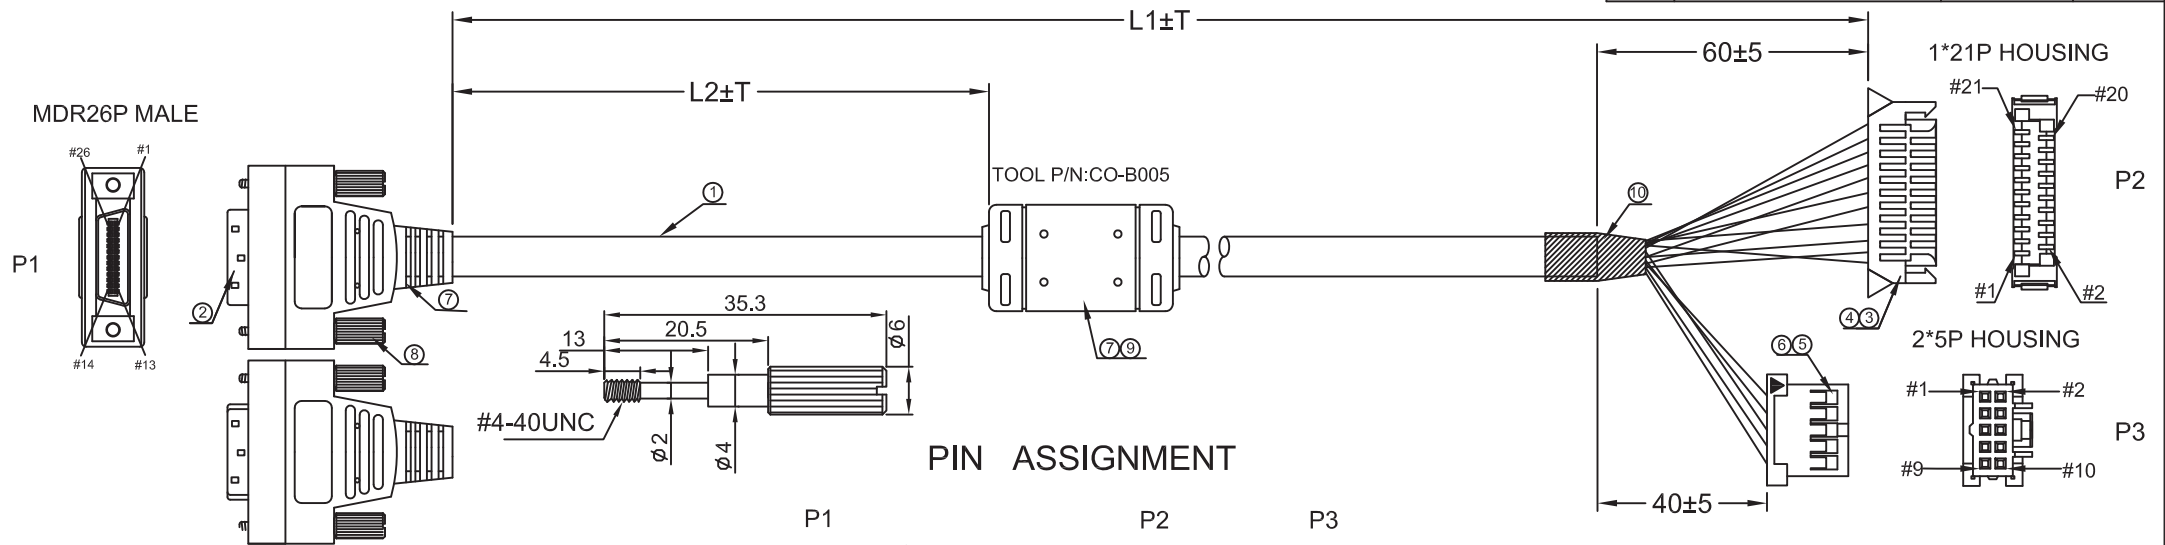

PIN ASSIGNMENT

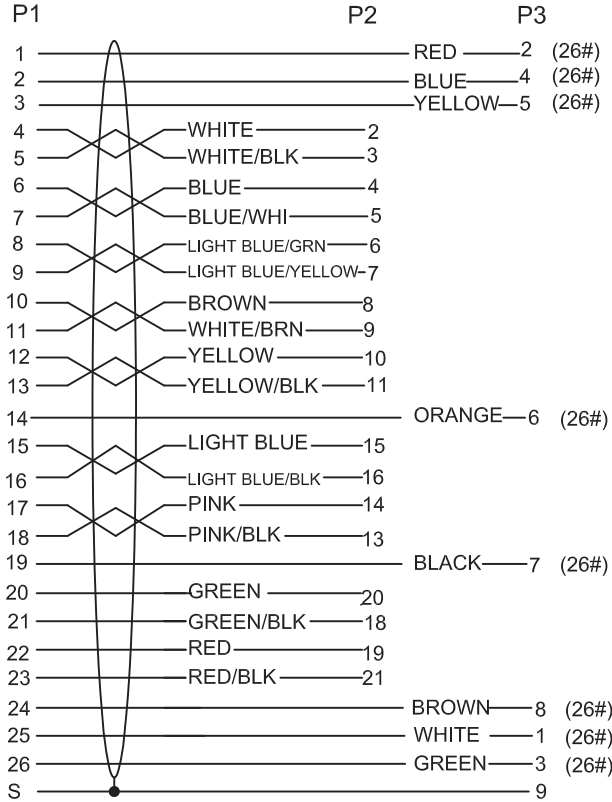

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100% OPEN, SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE: 10 Mohm MIN. DC 300V 0.01sec.
 - CONTACT RESISTANCE: 3 ohm.
- 外遮蔽不可剪掉要全接铆端或用电子线中间短接.
- 尾部端子要测铆压铜线 > 1-2kg, 不可用常规检测及判定

10	1	TU100002	HOT-TUBE : Ø 10*20MM T=0.25 125°C BLACK UL
9	2	CO003	CORE : 17.5MM*28.5MM*9.5MM
8	1	SRW013	SCREW-#4-40 6*35.3
7		PVCGY002	ALL CONNECTORS OVERMOLD GRAYPVC.
6	1	XADRP-10V HPH25013	JST HOUSING: 2*5PIN FEMALE PH2.5MM
5	9	SXA-001T-P0.6 TPH25013	JST TERMINAL: PH2.5MM AWG: 22# -28#
4	1	SHLVP-21V-S-L HPH05001	JST HOUSING: LVDS 1*21PIN PH0.5MM
3	18	SSHL-003GA1-P0.2 TPH05001	JST TERMINAL: 0.032-0.08mm AWG: 22# -28#
2	1	MDR26M001	MDR26P MALE SOLDER TYPE BLACK INSULATOR.
1	1	C289P002	28#*9P+26#*8C+AB OD9.0MM UL20276 GRAY PVC JACKET
ITEM	QTY	PART NUMBER	DESCRIPTION

Seconn International Enterprise Co., Ltd.

	REV.	MDR 26P To Housing 21P+2X5P Cable		
	B			
DRAW,BY: Geshanhua		P/N: SE-S-384		
CHECK,BY:		SCALE	UNIT	SHEET
APP,BY:		FREE	mm	1/1