


RoHS COMPLIANT


DESCRIPTION CONTROL

REV	DESC	DATE	APP
A	FIRST RELEASE	2013/03/01	

SCREW DETAIL

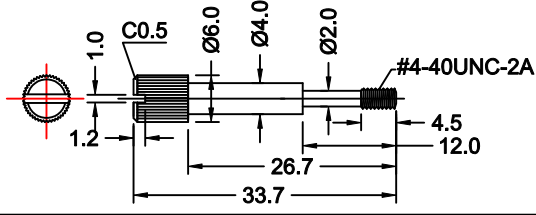


HD15 MALE



TOOL P/N.:DB-B009-03


TOOL P/N.:HD-B015-14

HD15 FEMALE

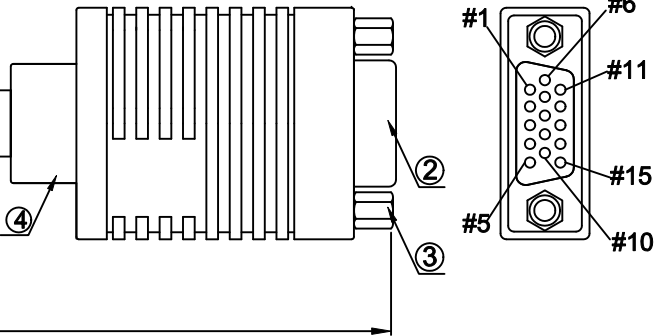


300±20

SCREW DETAIL

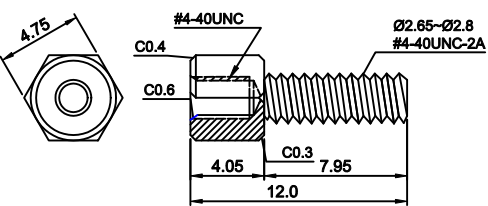

PIN ASSIGNMENT

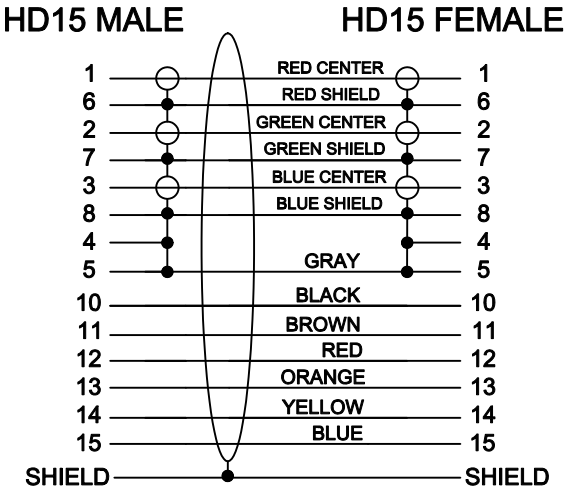

NOTES:

1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
(a).100%OPEN,SHORT & MISWIRE TEST,
(b). INSULATOR RESISTANCE:20 Mohm MIN.
DC 300V 0.01sec.
(c). CONTACT RESISTANCE:1 ohm MAX.

6	2	C0143	SCREW:#4-40UNC 6.0*33.7MM NICKEL PLATED.
5	1	A0022	HD15 MALE BLACK INSULATOR SOLDER TYPE.
4		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
3	2	C0234	SCREW:#4-40UNC 4.75*12.0MM NICKEL PLATED.
2	1	A0208	HD15 FEMALE,BLACK INSULATOR,SOLDER TYPE.
1	1	E0033	28AWG*UL1354*3(S)+24AWG*9C+ADB BLACK PVC JACKET OD:8.5MM UL2919.
ITEM	QTY	PART NUMBER	DESCRIPTION

Seconn International Enterprise Co., Ltd.

	REV.	VGA cable 15 Pin Female to 15 Pin 90 degree cable		
	A			
DRAW,BY:		P/N: SE-S-1590		
CHECK,BY:		SCALE	UNIT	SHEET
APP,BY:		FREE	mm	1/1