
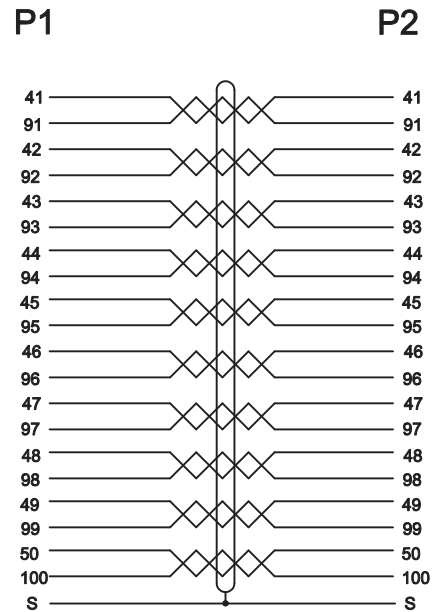
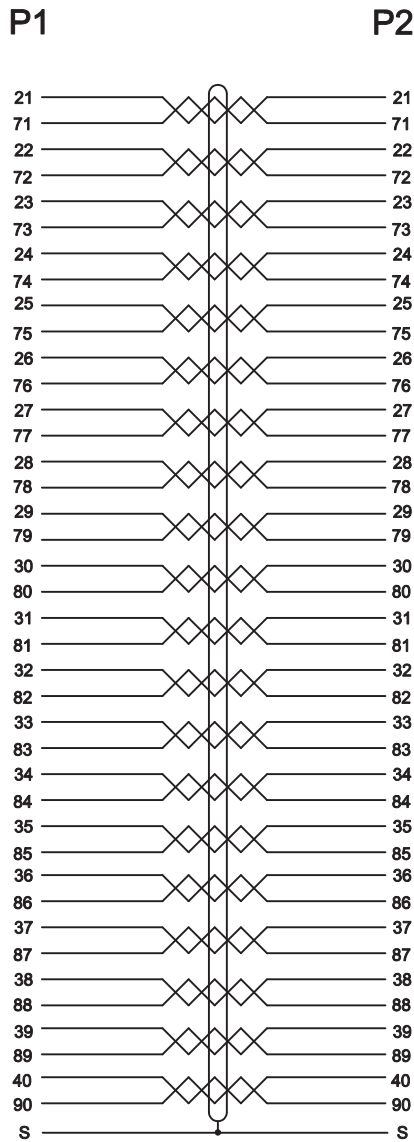


A

ROHS COMPLIANT

B

PIN ASSIGNMENT

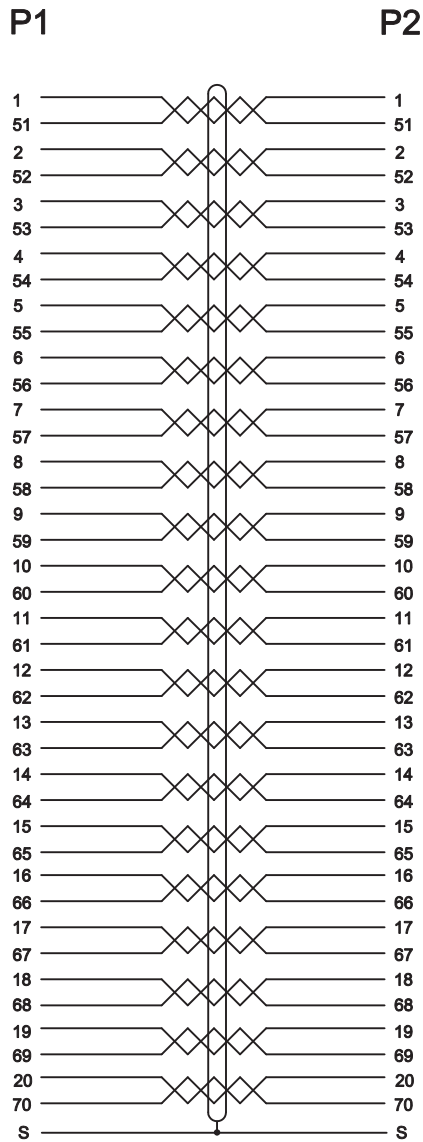

NOTES:

1. PIN ASSIGNMENT SEE TO WIRE LIST.

2. ELECTRICAL TEST CONDITION:

(a).100%OPEN,SHORT & MISWIRE TEST,

(b). INSULATOR RESISTANCE:20 Mohm MIN.

DC 300V 0.01~0.06sec,

(c). CONTACT RESISTANCE:3 ohm MAX.

Se Seconn International Enterprise Co., Ltd.

	REV.	HPDB100P Male to Mini HP		
	A	CN100P Male cable UL2990		
DRAW,BY:		P/N: SE-S-HPDBCN100P		
CHECK,BY:		SCALE	UNIT	SHEET
APP,BY:		FREE	mm	2 / 2