


**RoHS COMPLIANT**

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST EDITION	2016/09/01	

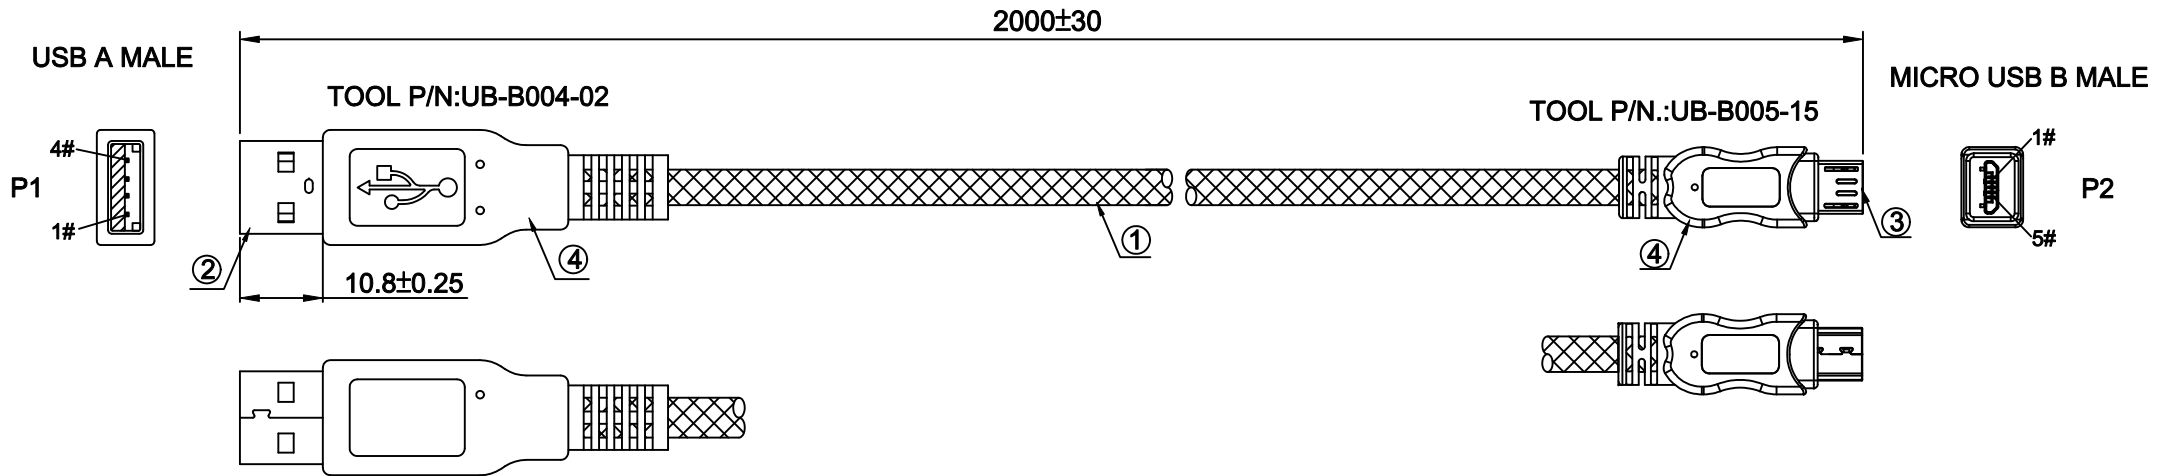


**ELECTRICAL CHARACTER:**

- 1.100% OPEN & SHORT TEST.
- 2.INSULATION RESISTANCE: 5 Mohm MIN.
- 3.CONTACT RESISTANCE: 3 ohm MAX.
- 4.HI-POT:DC300V 10us
- 5.TOTAL MATING FORCE:3.50 Kgf Max.
- TOTAL UNMATING FORCE:1.0 Kgf Min.

4		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
3	1	A0625	MICRO USB B MALE,PIN GOLD PLATED 30U" SOLDER TYPE.
2	1	A0182	USB A TYPE ,MALE ,WHITE INSULATOR GOLD FLASH SOLDER TYPE.
1	1		24AWG*2C OD:4.0MM UL2725 BLACK PVC JACKET OUTSIDE RED/WHITE BRAID.
ITEM	QTY	PART NUMBER	DESCRIPTION

**PIN ASSIGNMENT**

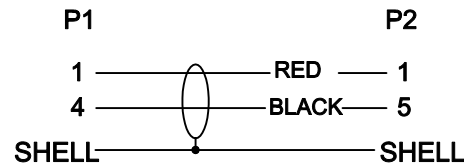

**Seconn International Enterprise Co., Ltd.**

	REV.	DWG NO: SE-S-0038		
	A	USB A Male To Micro USB B Male Cable		
DRAW,BY: zhaopeng		SCALE	UNIT	SHEET
CHECK,BY: Caojiawei		FREE	mm	1/1
APP,BY: Mr.Huang				