RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2016/11/15	

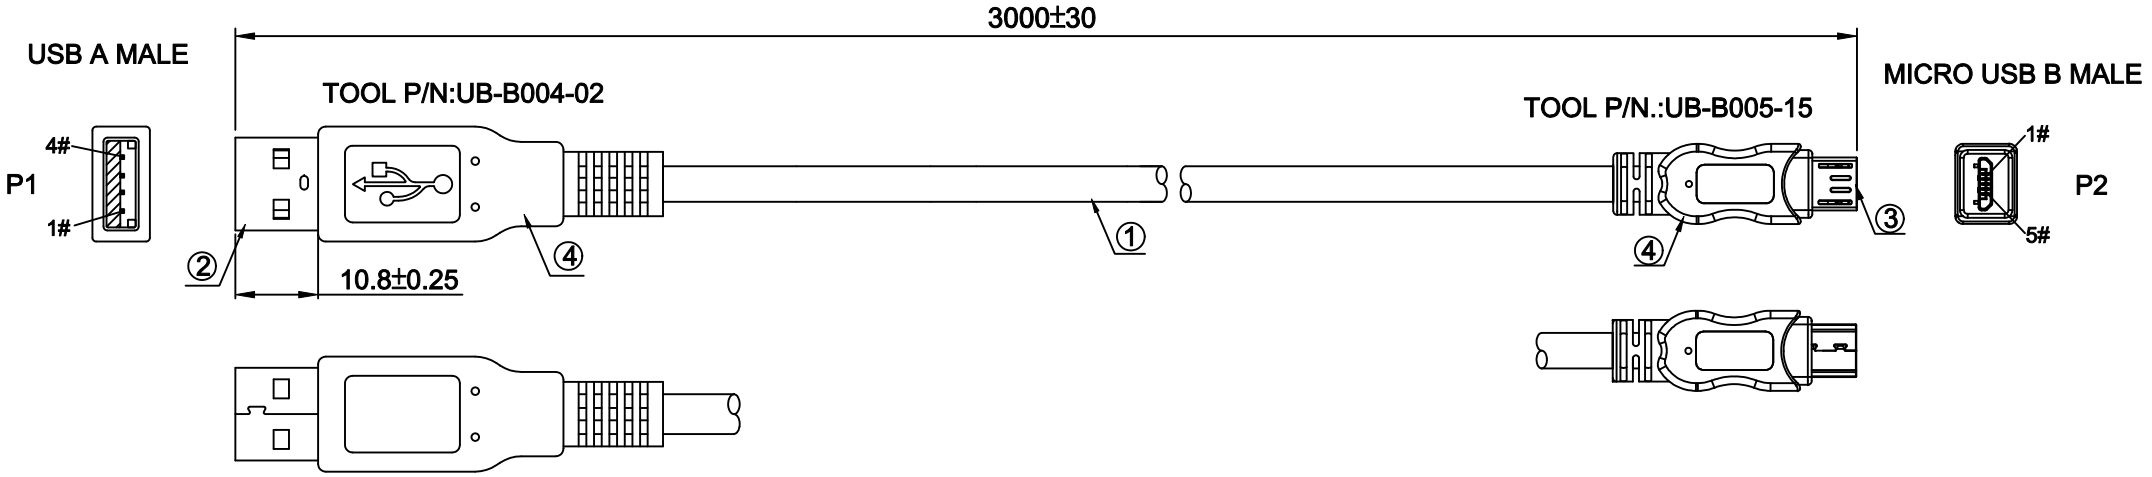

PIN ASSIGNMENT

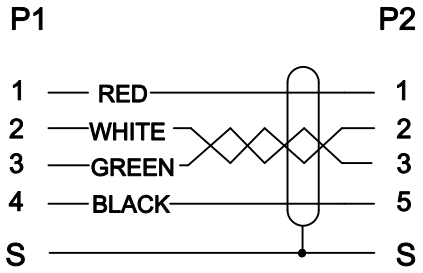

NOTES:

1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
   (a).100%OPEN,SHORT & MISWIRE TEST,
   (b). INSULATOR RESISTANCE:20 Mohm MIN.
   DC 300V 0.01sec.
   (c). CONTACT RESISTANCE:3ohm MAX.

ITEM	QTY	PART NUMBER	DESCRIPTION
4		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
3	1	A0625	MICRO USB B MALE,PIN GOLD PLATED 30U" SOLDER TYPE.
2	1	A0182	USB A TYPE ,MALE ,WHITE INSULATOR GOLD FLASH SOLDER TYPE.
1	1	E0423	28AWG*1PAIR+20AWG*2C +ADB OD:5.1MM BLACK PVC JACKET.

UNIT	mm	Projection		Seconn International Enterprise Co., Ltd.	
DRAWN	ZHAO PENG	SCALE	FREE	TITLE	
CHECK,BY	Cao jiawei	REV	A	USB-A M/MICRO USB-B M	
APP,BY	Mr.Huang	DATE	2016/11/15	TOLERANCES	
DWG NO.	SE-S-0287			X.= ± .X= ± .XX= ± .XXX= ±	
PART NO.	SE-S-0287-3M			SHEET 1/1	SIZE A4