


螺帽鎖到底: L:55.3 +/- 0.3

L:56.3 +/- 0.3 (含防塵蓋吊繩)

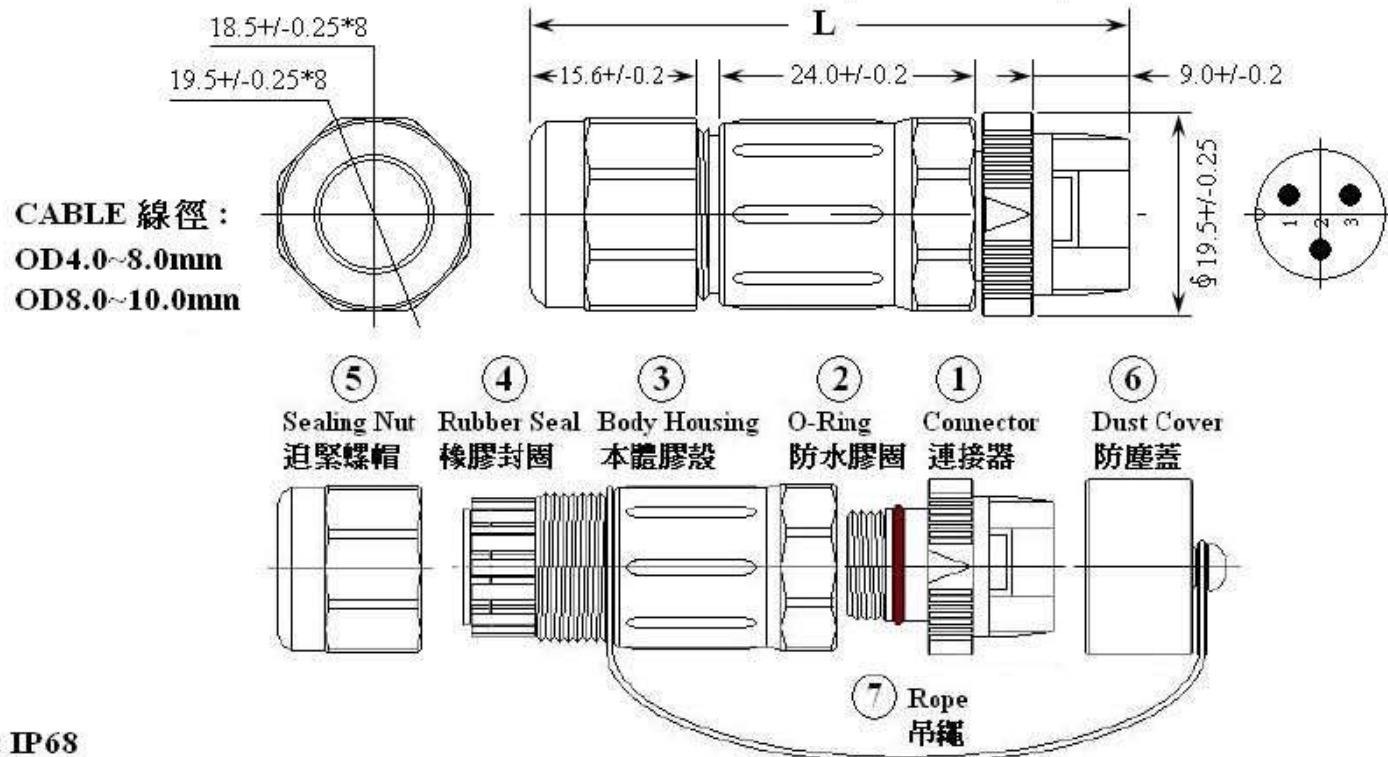

Water Proof : IP68
UV Resist

7	Rope	RUBBER EPDM	BLACK
6	Dust Cover	RUBBER EPDM	BLACK
5	Sealing Nut	PA66-UL94V-1 UV RESIST	BLACK
4	Rubber Seal	RUBBER EPDM	BLACK
3	Body Housing	PA66-UL94V-1 UV RESIST	BLACK
2	O-Ring	SILICON RUBBER	BROWN
1	Connector	PA66-UL94V-0 / BARSS GOLD PLATED	BLACK
NO	PART NAME	MATERIAL	COLOR

PIN 數選項	Electrial Specification
125180AS-RM-02~05P	10A / 250V
125100AS-RM-04~06P	3A / 250V
125210AS-RM-02+05P	7A+3A / 250V
125075AS-RM-08~18P	2A / 250V

Se Seconn International Enterprise Co., Ltd.

TOLERANCES			PROJECTION	TITLE			
AS DRAWING				Waterproof Connector male type for Wire			
			UNIT mm				
DRAWN	Guo	DATE	2013/04/16	PART NO.	S125AS-RM-NP+DC		
SCALE	4:1	SIZE	A4	SHEET	1/1	REV	A/0