
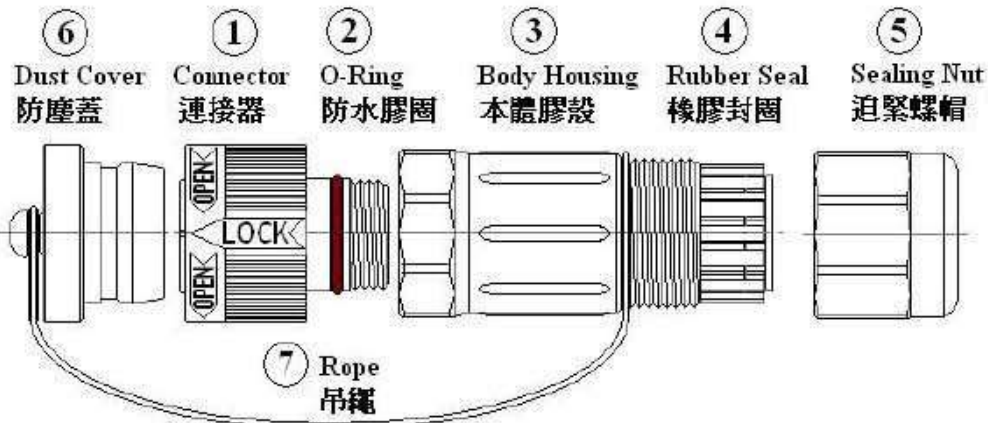


螺帽鎖到底: L:55.3 +/- 0.3

L:56.3 +/- 0.3 (含防塵蓋吊繩)

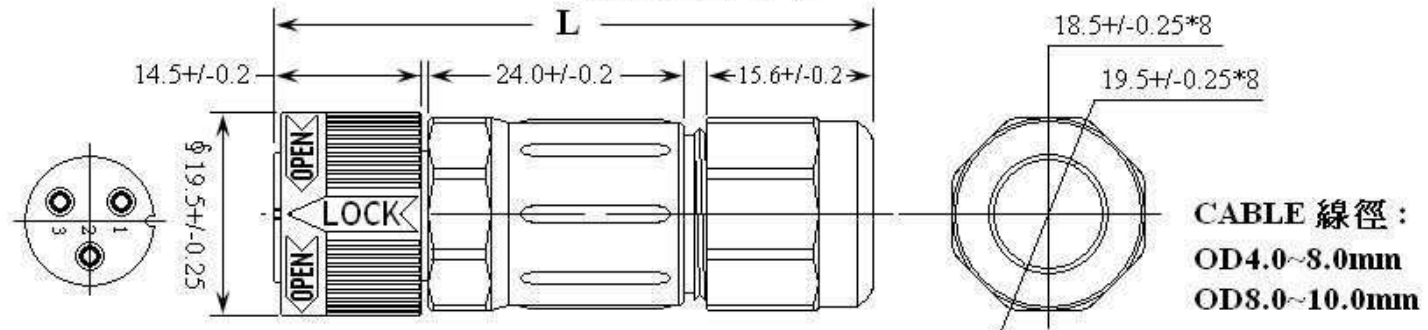

Water Proof : IP68
UV Resist

7	Rope	RUBBER EPDM	BLACK
6	Dust Cover	RUBBER EPDM	BLACK
5	Sealing Nut	PA66-UL94V-1 UV RESIST	BLACK
4	Rubber Seal	RUBBER EPDM	BLACK
3	Body Housing	PA66-UL94V-1 UV RESIST	BLACK
2	O-Ring	SILICON RUBBER	BROWN
1	Connector	PA66-UL94V-0 / BARSS GOLD PLATED	BLACK
NO	PART NAME	MATERIAL	COLOR

PIN 數選項

125180AS-PF-02~05P
125100AS-PF-04~06P
125210AS-PF-02+05P
125075AS-PF-08~18P

Electrial Specification

10A / 250V
3A / 250V
7A+3A / 250V
2A / 250V



Seconn International Enterprise Co., Ltd.

TOLERANCES		PROJECTION	TITLE			
AS DRAWING			Waterproof Connector Female type for Wire			
		UNIT				
		mm				
DRAWN	Guo	DATE	2013/04/16	PART NO.	S125AS-PF-NP+DC	
SCALE	4:1	SIZE	A4	SHEET	1/1	REV A/0