


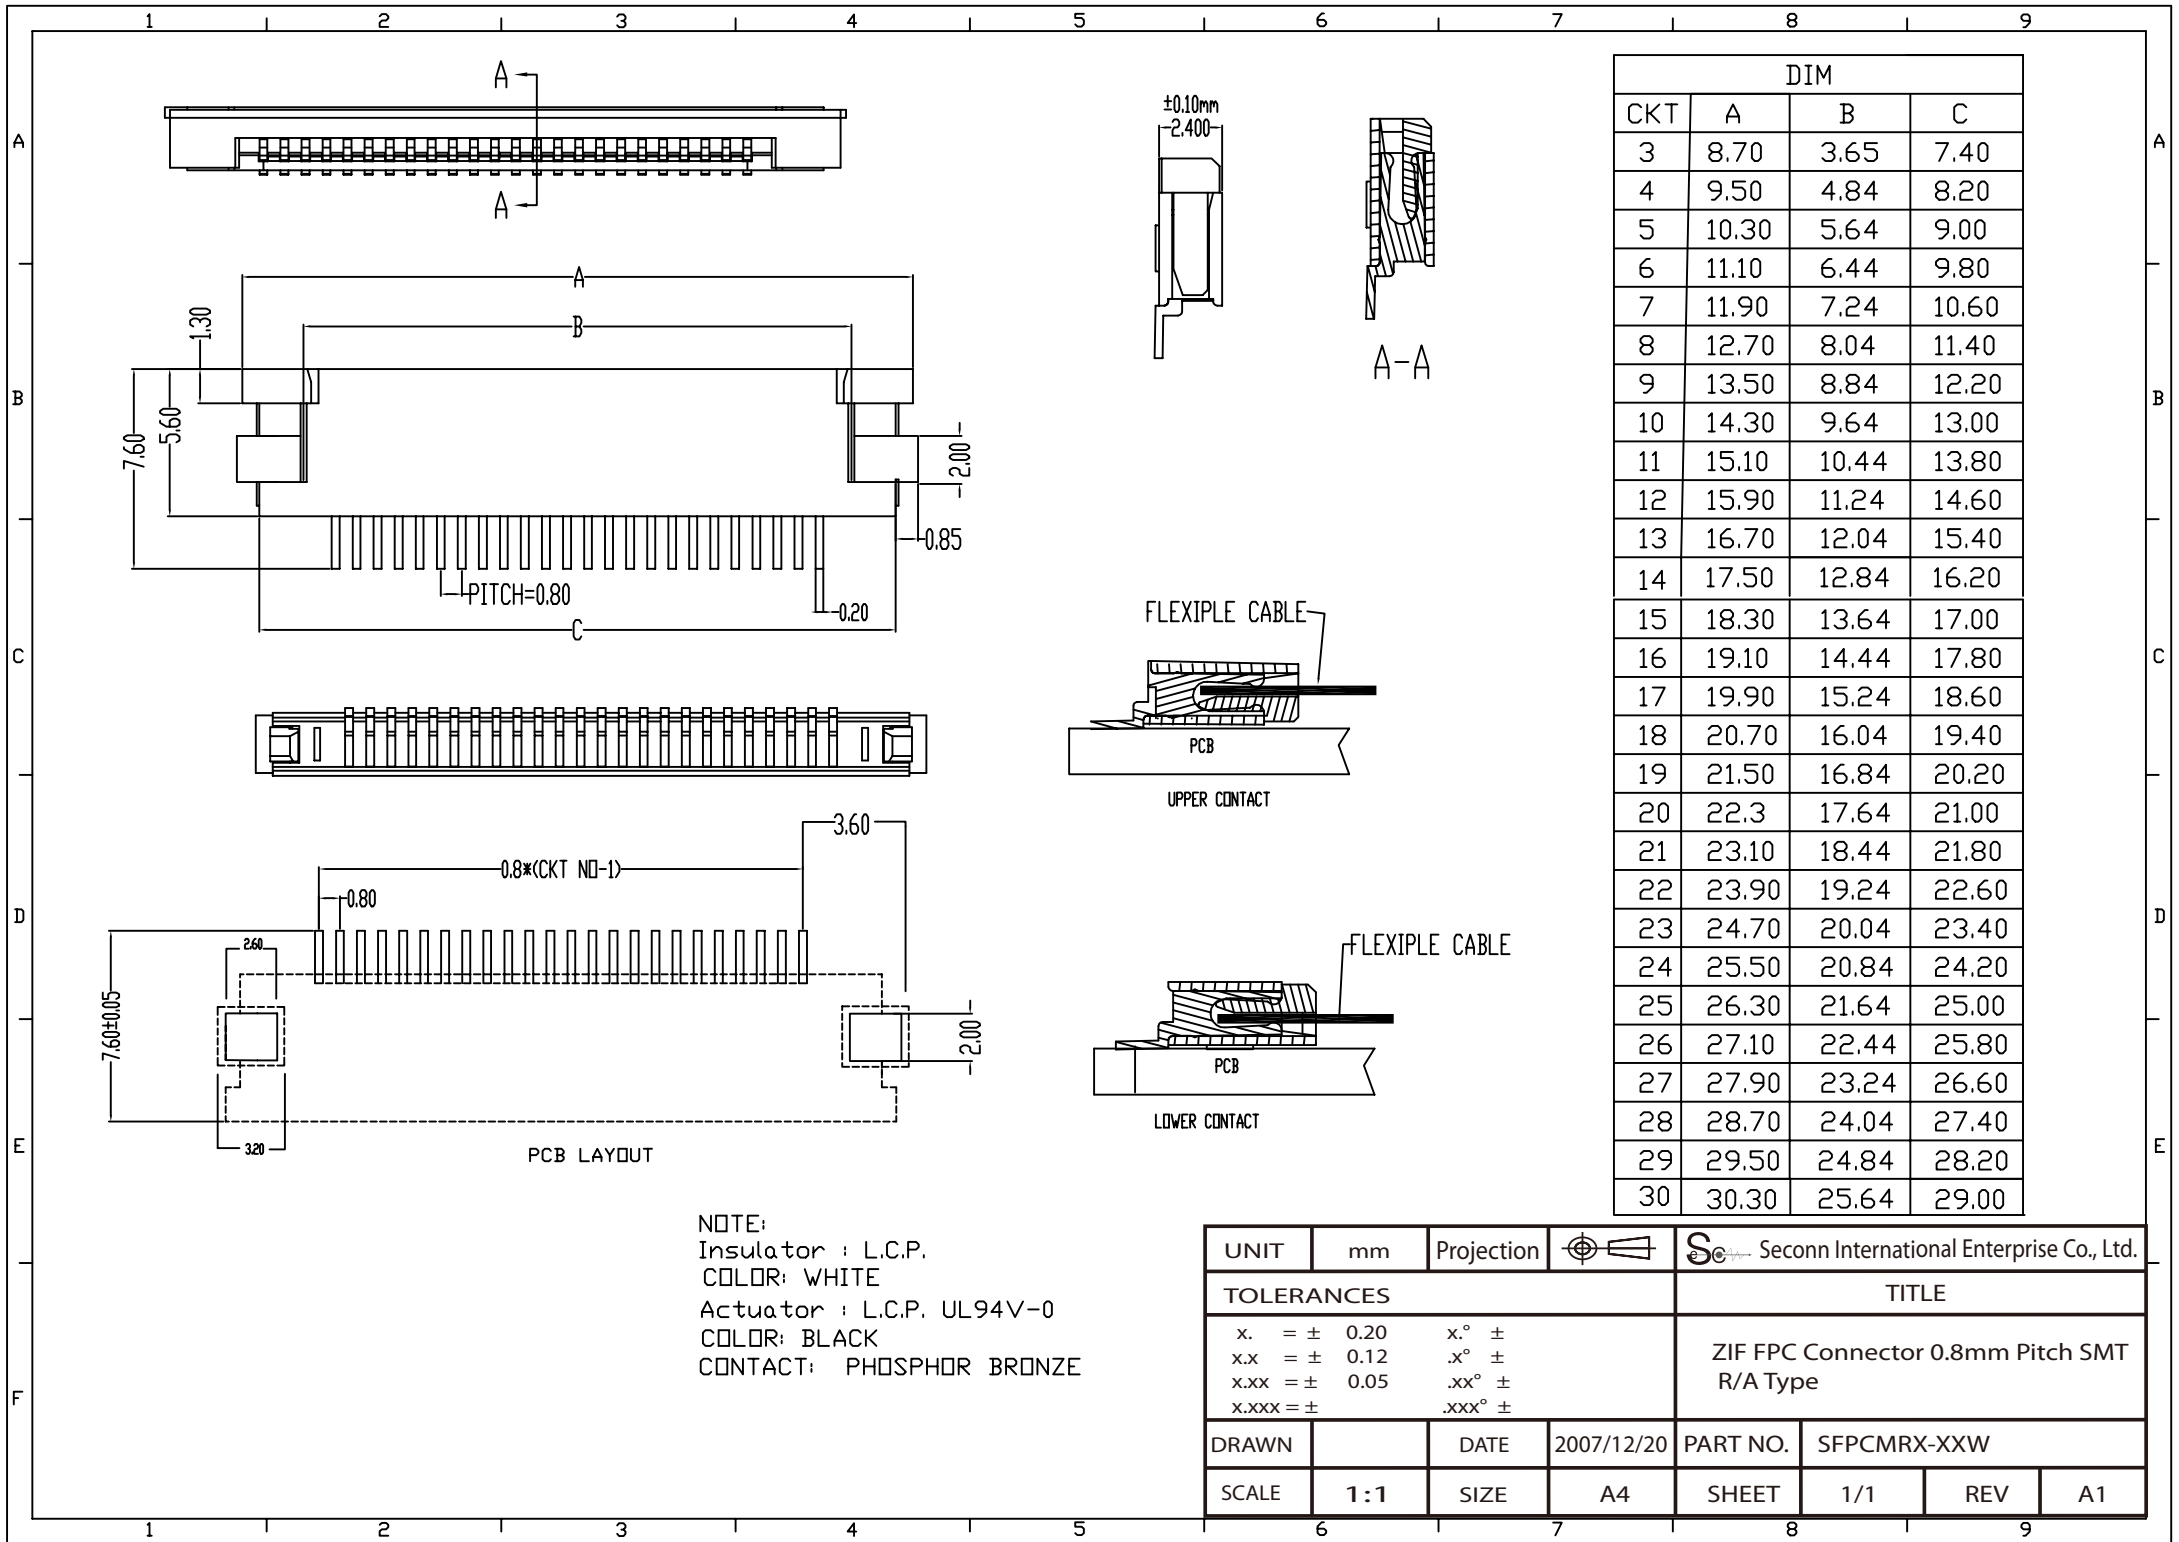

DIM			
CKT	A	B	C
3	8.70	3.65	7.40
4	9.50	4.84	8.20
5	10.30	5.64	9.00
6	11.10	6.44	9.80
7	11.90	7.24	10.60
8	12.70	8.04	11.40
9	13.50	8.84	12.20
10	14.30	9.64	13.00
11	15.10	10.44	13.80
12	15.90	11.24	14.60
13	16.70	12.04	15.40
14	17.50	12.84	16.20
15	18.30	13.64	17.00
16	19.10	14.44	17.80
17	19.90	15.24	18.60
18	20.70	16.04	19.40
19	21.50	16.84	20.20
20	22.3	17.64	21.00
21	23.10	18.44	21.80
22	23.90	19.24	22.60
23	24.70	20.04	23.40
24	25.50	20.84	24.20
25	26.30	21.64	25.00
26	27.10	22.44	25.80
27	27.90	23.24	26.60
28	28.70	24.04	27.40
29	29.50	24.84	28.20
30	30.30	25.64	29.00

NOTE:
Insulator : L.C.P.
COLOR: WHITE
Actuator : L.C.P. UL94V-0
COLOR: BLACK
CONTACT: PHOSPHOR BRONZE

UNIT	mm	Projection		Secon International Enterprise Co., Ltd.			
TOLERANCES				TITLE			
x.	= ± 0.20	x.°	±	ZIF FPC Connector 0.8mm Pitch SMT R/A Type			
x.x	= ± 0.12	x.°	±				
x.xx	= ± 0.05	.xx°	±				
x.xxx	= ±	.xxx°	±				
DRAWN		DATE	2007/12/20	PART NO.	SFPCMRX-XXW		
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	A1