



型 号	模 号	變更內容	變更日期	版本
USB AM	KL194			

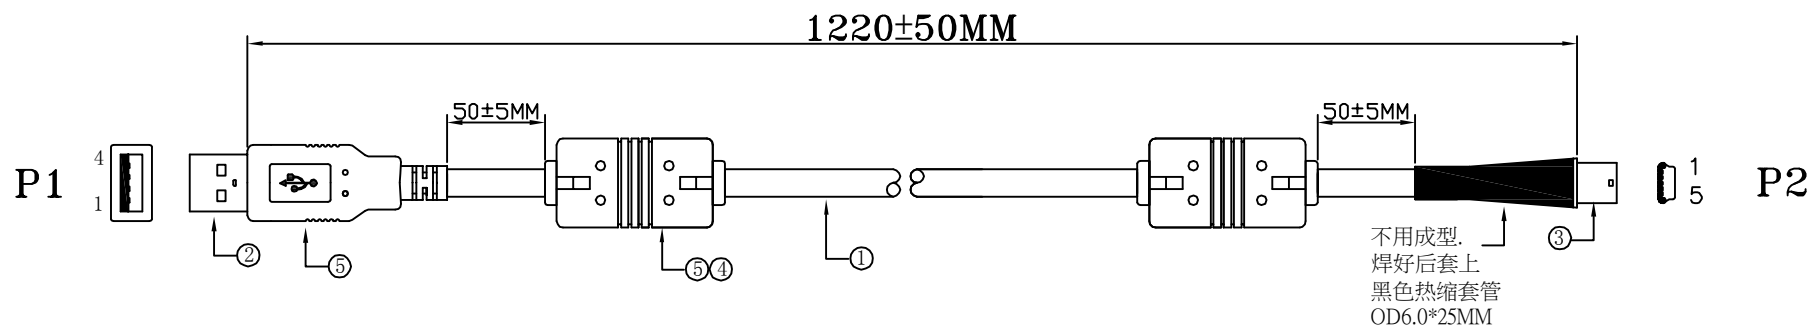


PACKING: 单PCS圆形理线.在再依照
外箱大小装入PE袋.

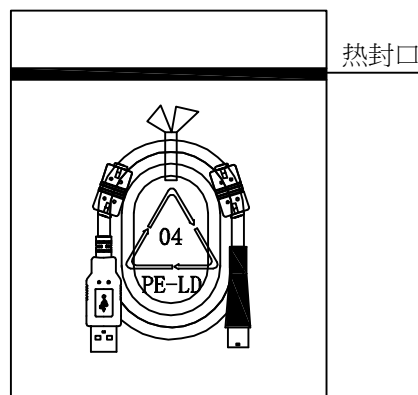

ELECTRONIC TEST:

1. 100% TEST, (Open, Short, Miss Wire).
2. Conduct Resistance: $2\Omega/\text{max}$.
3. Insulation Resistance: $10M\Omega/\text{min}$.
4. Hi-Pot: DC 300v ms.

PIN OUT

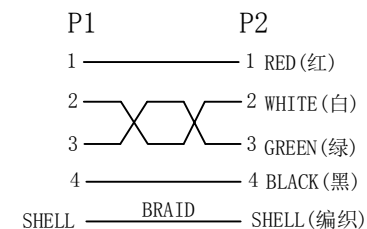

PART LIST:本产品均符合”ROHS”环保标准，用的材料均为相当品。

6	热缩套管: OD6.0*25MM	1	PCS
5	PVC:45P BLACK(黑色)		KG/K
4	Ø9.5*5*20MM BLACK	2	PCS
3	USB MINI5P M:GOLD FLASH CONNECTOR, NICKEL PLAIED SHELL, PLASTLC:WHITE.	1	SET
2	USB AM:GOLD FLASH CONNECTOR, NICKEL PLAIED SHELL, PLASTLC:WHITE.	1	SET
1	CABLE:UL2725 28AWG*1P+24AWG*2C+AB OD:4.5MM 2.0 OLOR: BLACK(黑色)	1	PCS
ITEM	STANDARD SPECIFICATION	Q' TY	UNIT

TOLERANCES			PROJECTION	TITLE			
AS DRAWING				USB A Male to Mini USB 5 Pin Cable Black Color L:1220mm			
			UNIT				
			mm				
DRAWN	DIANA	DATE		PART NO.	SC-S-K1709-1103		
SCALE		SIZE	A4	SHEET	1/1	REV	A