



RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2017/02/20	
B	CHANGE PIN ASSIGNMENT	2017/03/22	

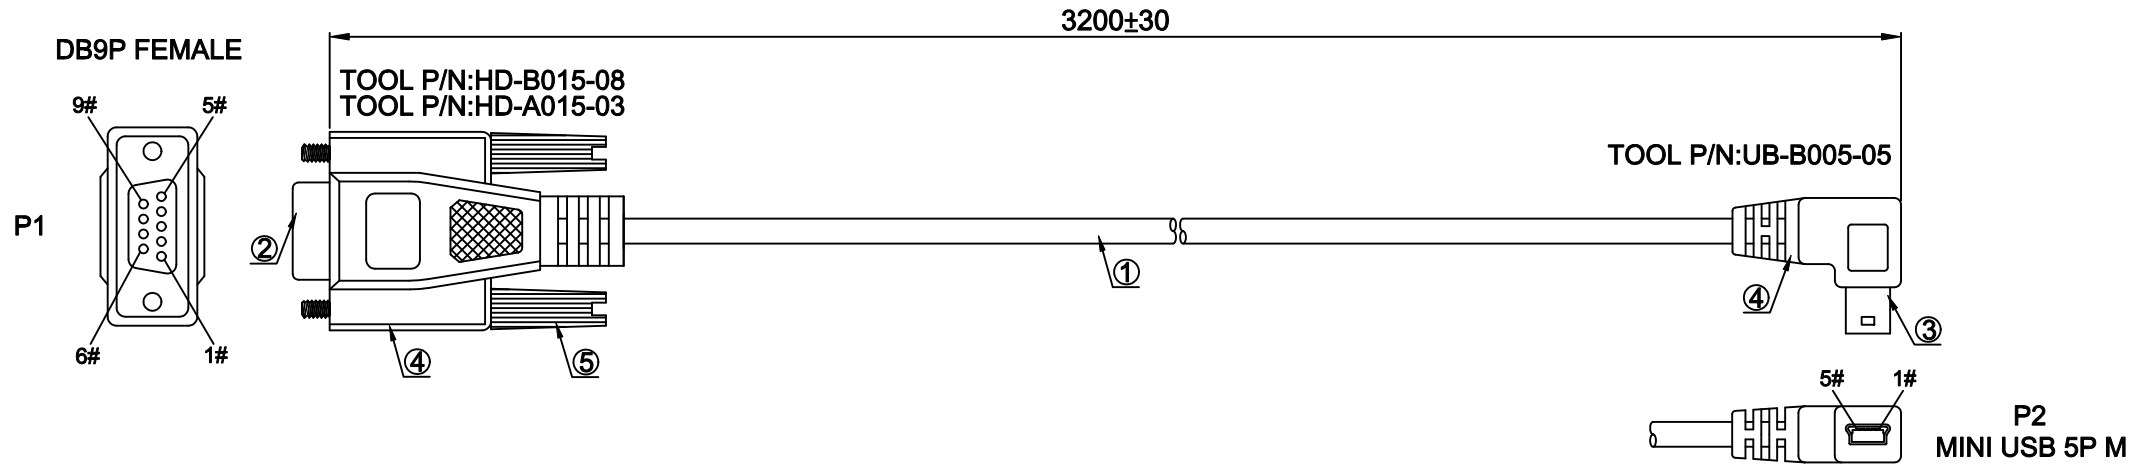


PIN ASSIGNMENT

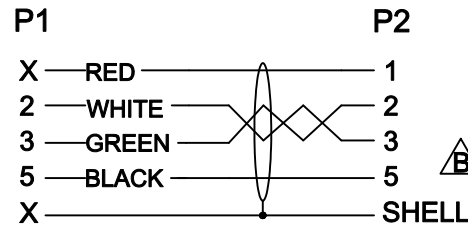

NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
 - 100% OPEN, SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.01sec.
 - CONTACT RESISTANCE: 3ohm MAX.

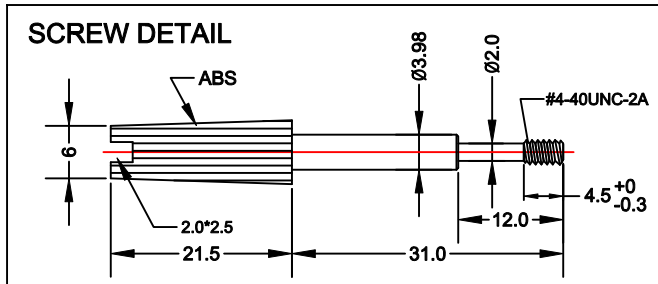

ITEM	QTY	PART NUMBER	DESCRIPTION
5	2	C0052	SCREW:#4-40UNC E31 BLACK ABS.
4		G0001	ALL CONNECTORS OVERMOLD BLACK PVC.
3	1	A0582	MINI USB 5P MALE BLACK INSULATOR SOLDER TYPE.
2	1	A0010	DB9P FEMALE BLACK INSULATOR SOLDER TYPE.
1	1	E0843	28AWG*1PAIR+24AWG*2C+ADB OD:4.5mm BLACK PVC JACKET UL2725.

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.
DRAWN	Deng zhifei	SCALE	FREE	TITLE	
CHECK, BY	Cao jianwei	REV	B	DB9 F/MINI USB 5P M	
APP, BY	Mr. Huang	DATE	2017/02/20	TOLERANCES	
DWG NO.	SE-S-0307			X.= ±	.X.= ±
PART NO.	SE-S-0307-3.2M			.XX.= ±	.XXX.= ±
	SHEET	1/1	SIZE	A4	