

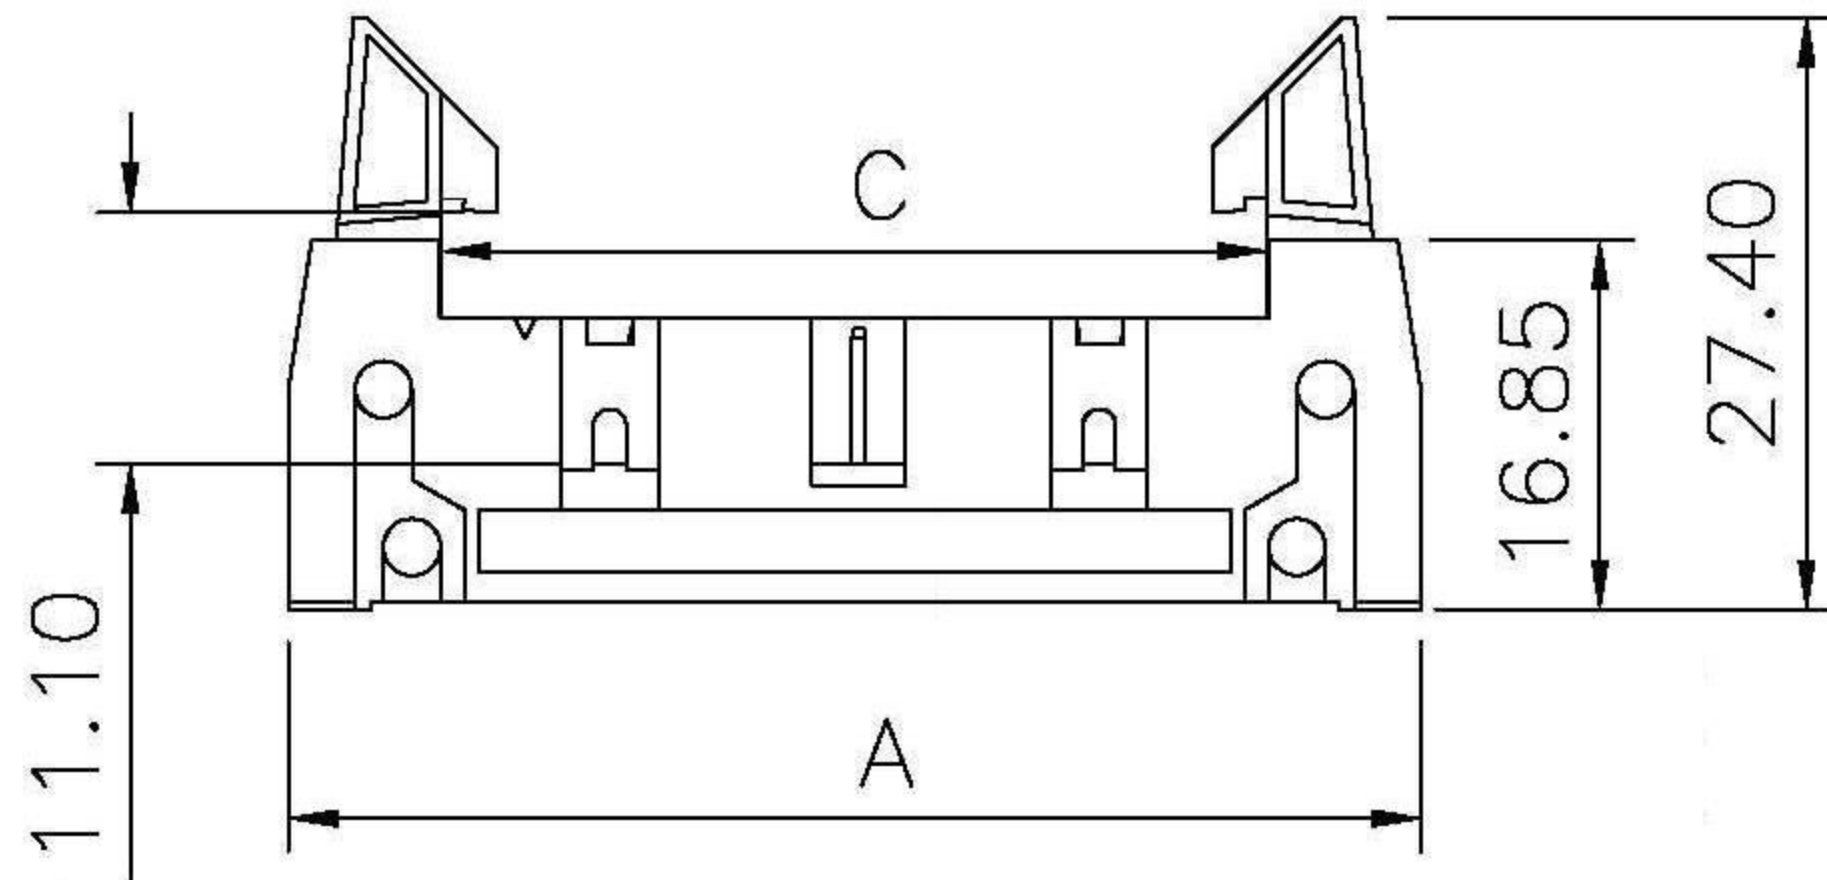
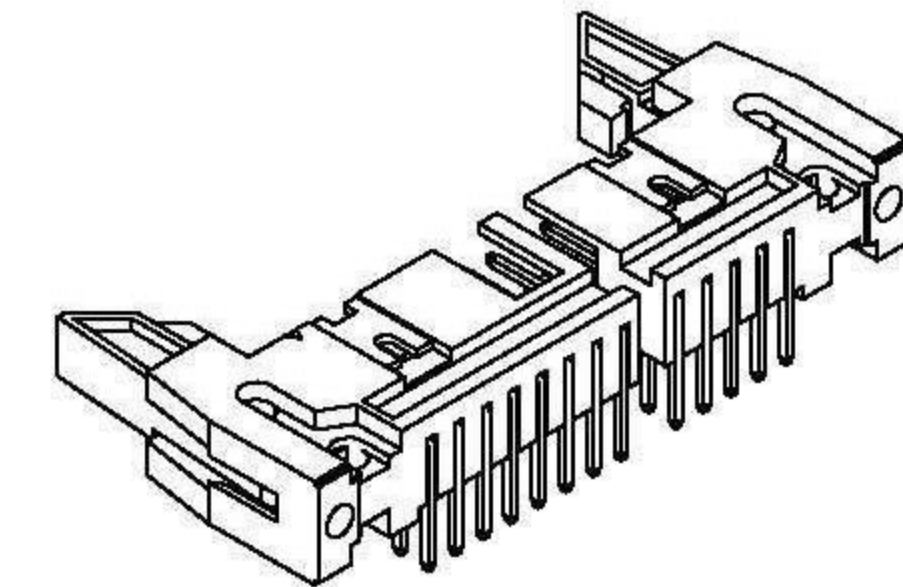
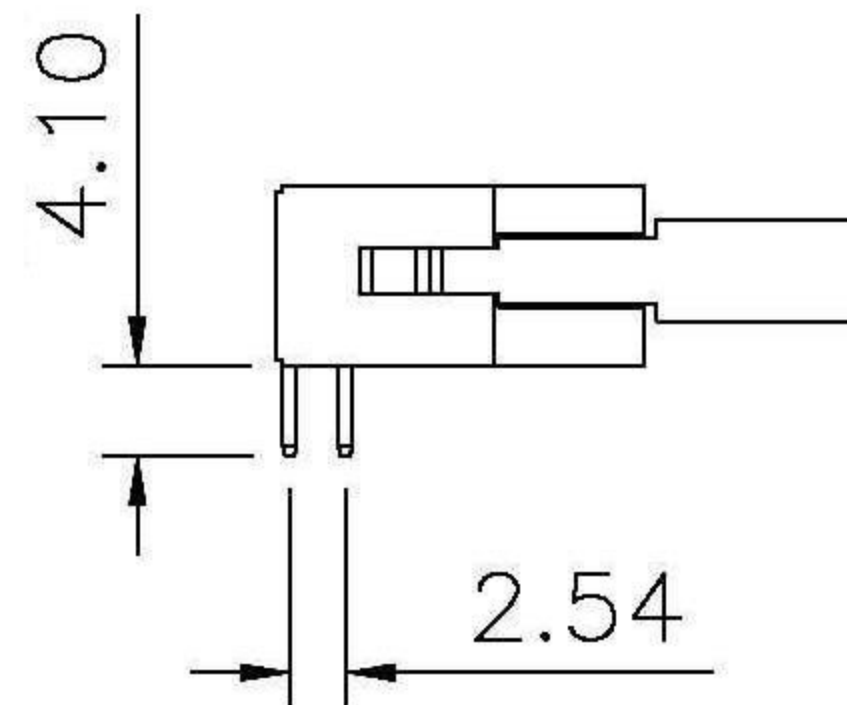


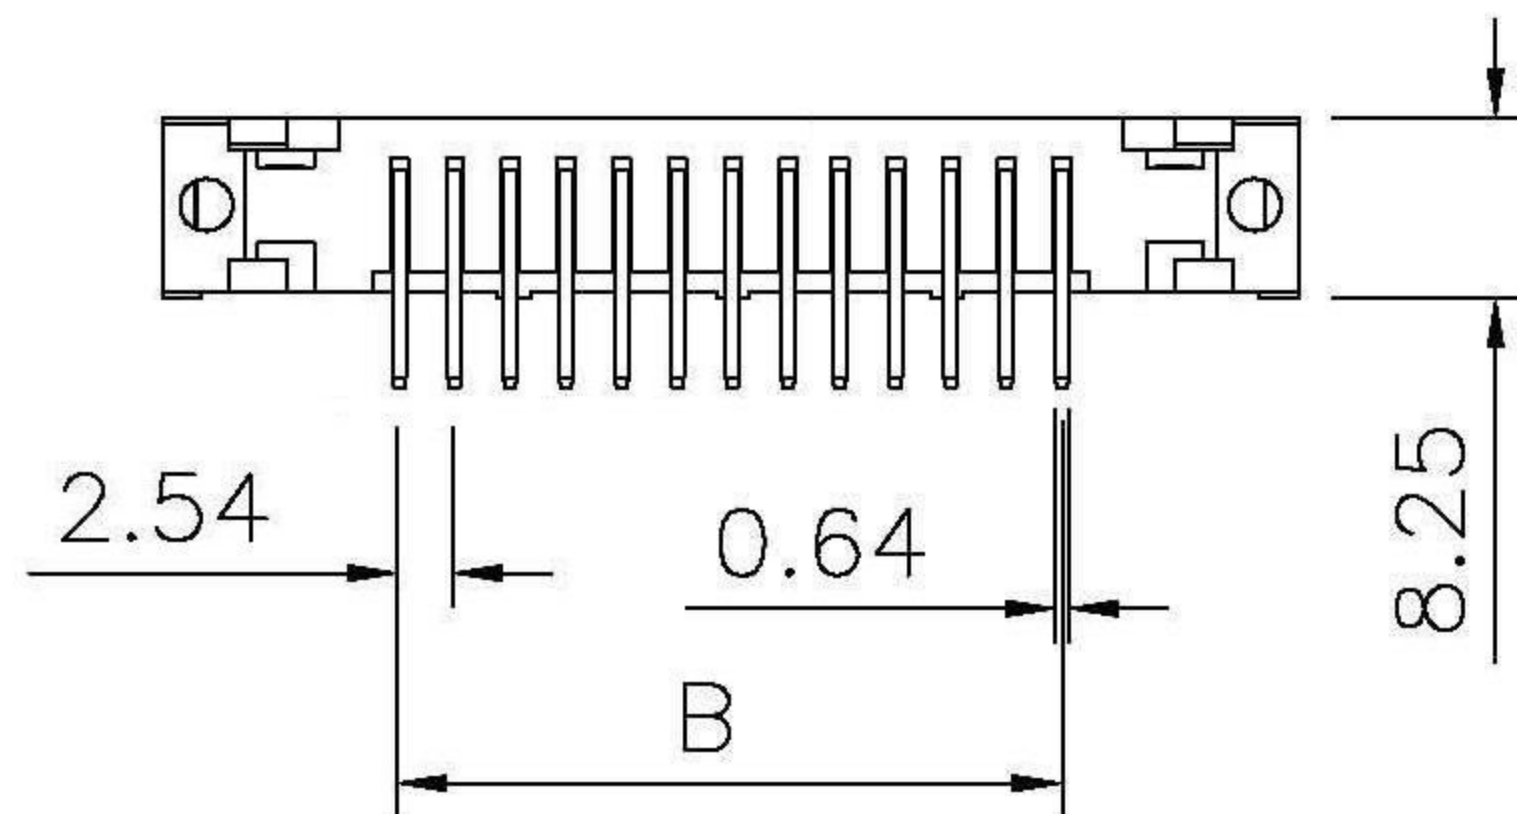

Recommended P.C. Board Hole Layout

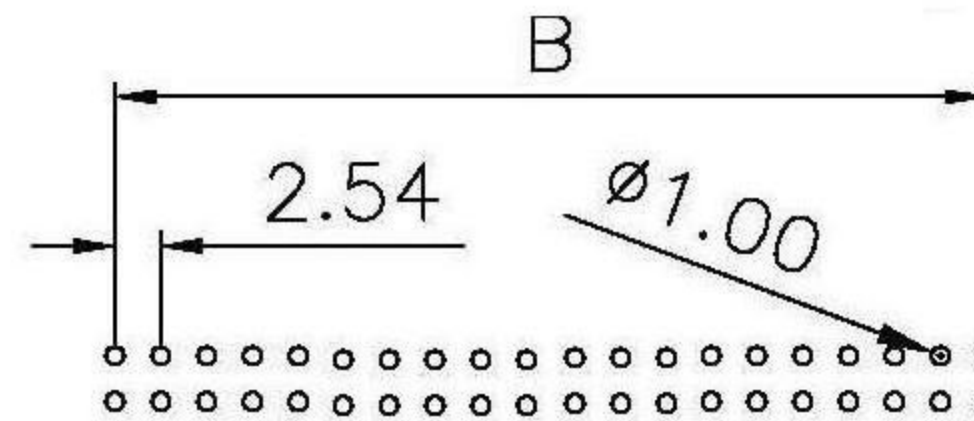

Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min
 Dielectric Withstanding: AC 1000 V
 Operating Temperature: - 40° ~ +105° C
 Contact Material: Copper Alloy
 Insulator Material: Polyester,UL 94V-0
 Standard: PBT

Finish: Gold Plated or Duplex Plated
 Standard: Gold Flash all over
 Note:
 Duplex Plating: Gold Plated on contact area,
 Tin on solder area

Insulator Material: Polyester,UL 94V-0
 Standard: Nylon-6T
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds

CONTACTS	10 pin	12 pin	14 pin	16 pin	20 pin	24 pin	26 pin
A	31.90	34.60	36.98	39.52	44.60	49.68	52.15
B	10.16	12.70	15.24	17.78	22.86	27.94	30.48
C	18.00	20.54	23.08	25.62	30.70	35.78	38.32
CONTACTS	30 pin	34 pin	40 pin	50 pin	60 pin	64 pin	
A	57.40	62.38	70.00	82.70	95.60	100.7	
B	35.56	40.64	48.26	60.96	73.66	78.74	
C	43.40	48.48	56.10	68.80	81.82	86.90	

RoHS Compliant

Seconn International Enterprise Co., Ltd.

TOLERANCES			PROJECTION	TITLE			
x.x = ± 0.25 x.xx = ± 0.20				2.54mm Shrouded Header, Right Angle, Short Latch			
			UNIT				
			mm				
DRAWN	David	DATE	2007/09/01	PART NO.	SH-S2XXR0XXT00		
SCALE		SIZE	A4	SHEET	1/1	REV	01