



**RoHS COMPLIANT**

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2013/07/12	
B	ADD PACKING	2013/11/27	

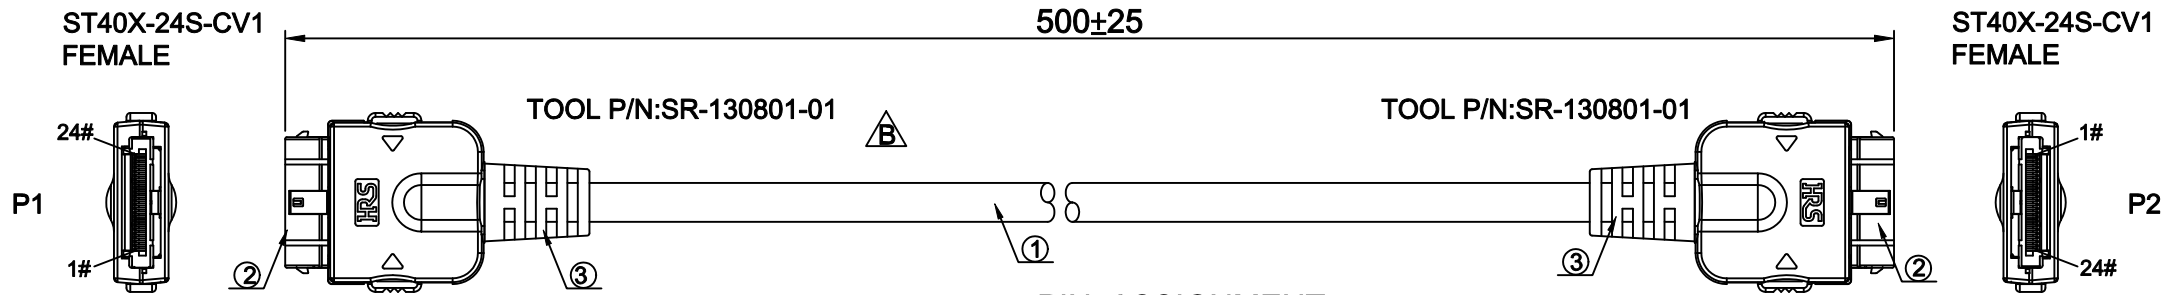

**PIN ASSIGNMENT**

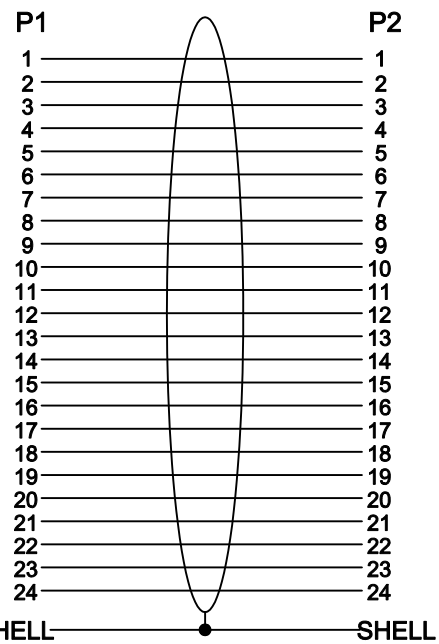

**NOTES:**

- PIN ASSIGNMENT SEE TO WIRE LIST.
- ELECTRICAL TEST CONDITION:
  - 100% OPEN, SHORT & MISWIRE TEST,
  - INSULATOR RESISTANCE: 20 Mohm MIN. DC 300V 0.01sec.
  - CONTACT RESISTANCE: 1 ohm MAX.

ITEM	QTY	PART NUMBER	DESCRIPTION
3		G0069	SR OVERMOLD BLACK PVC.
2	2		24PIN FEMALE ASSEMBLING TYPE HIROSE:ST40X-24S-CV1.
1	1		30AWG*24C+AM+D+BRAIN BLACK PVC JACKET OD:5.0MM UL2835.

UNIT	mm	Projection			Seconn International Enterprise Co., Ltd.
DRAWN	<i>Huang shenggen</i>	SCALE	FREE	TITLE	
CHECK, BY	<i>James</i>	REV	B	ST40X-24S-CV1 F/F	
APP, BY	<i>Mr. Huang</i>	DATE	2013/07/12	TOLERANCES	
DWG NO.	SE-S-0083			X.= ±	.X= ±
PART NO.	0162-000-003		SHEET	1/2	SIZE
					A4