

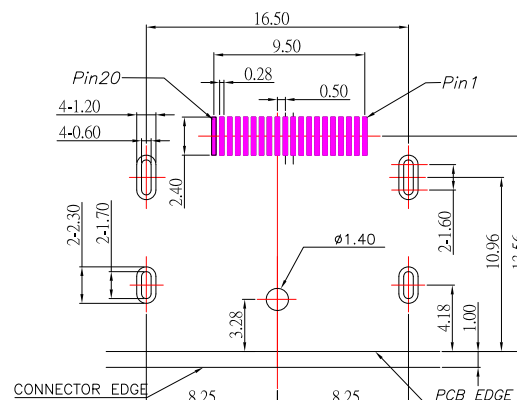
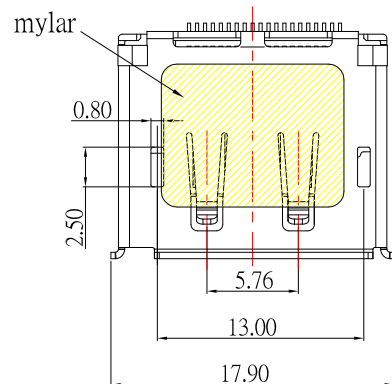





RECOMMENDED PCB LAYOUT

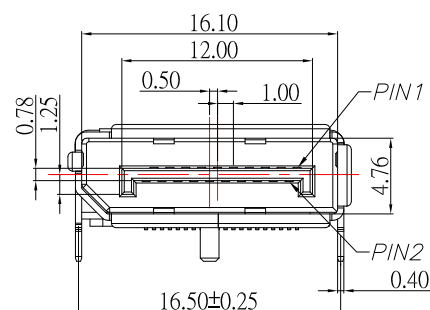

1.SPECIFICATION:

- 1.1 Current Rate: 0.5 A
- 1.2 Voltage Rate: 40V AC
- 1.3 insulator Resistance: 100 MΩ Min
- 1.4 Dielectric Strength: 500V AC
- 1.5 Contact Resistance: 30mΩ Max

2.MATERIAL:

- 2.1 Housing: LCP, Black
- 2.2 Contact: Brass
- 2.3 Shell: Brass

3.Finish:

- 3.1 Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 3.2 Shell: Nickel under Plated surface layer

Seconn International Enterprise Co., Ltd.

TOLERANCES			PROJECTION	TITLE			
30 -50 mm ±0.50 15 -30 mm ±0.40 05 -15 mm ±0.30 UP To 05 mm ±0.20				Display Port female SMT Type Connector			
DRAWN	Jack Lu	DATE	2018/04/20	PART NO.	SDP-F205-S297		
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	A1