
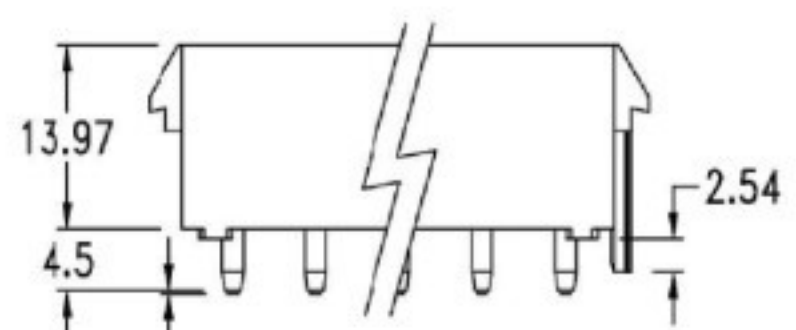


SPVA-6350-106P/SPVA-6350-106

Single Row

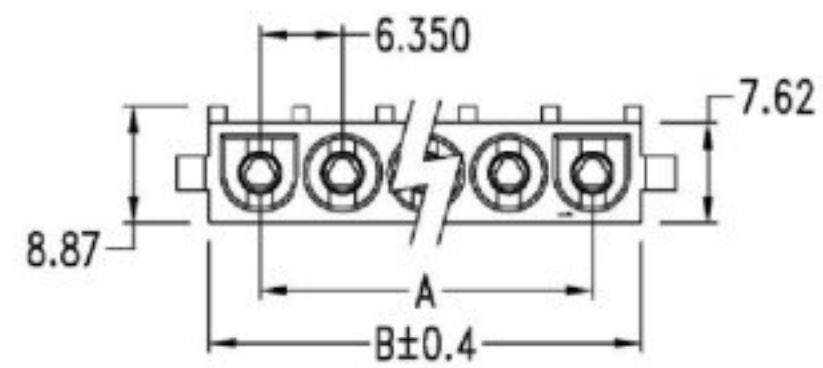



Features:

- 2 ~ 10, 12, 15 circuits available
- Pin Material: Tin-plated phosphor bronze
- Standard Color: Nature

RoHS compliant


Specification:

- Current rating: 13A (2~4P), 11A (6~15P)
- Voltage rating: 600V
- Dielectric withstanding voltage: 5000V AC/minute
- Ambient temperature rise: -55°C ~ 105°C

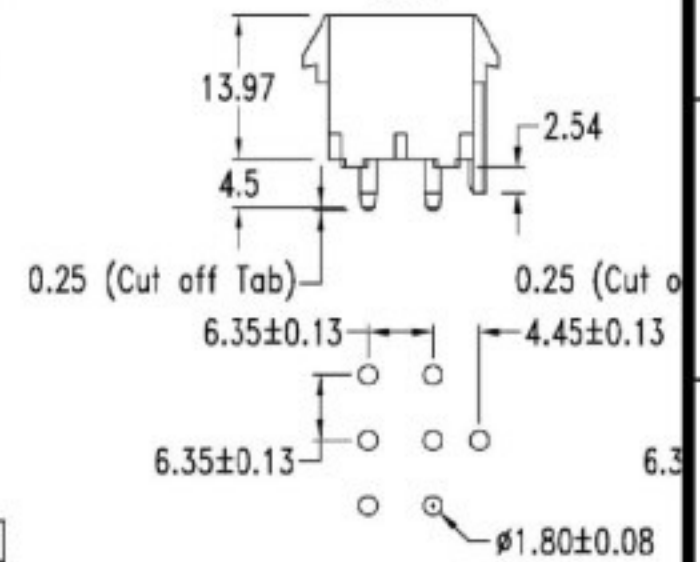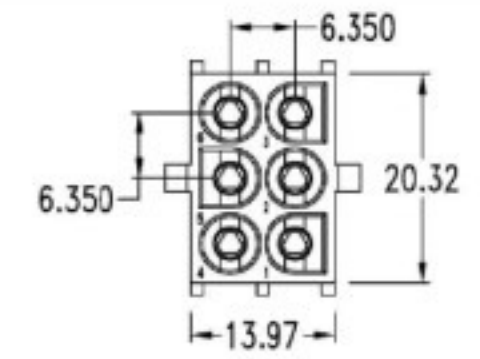

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	6.35	13.97	7	38.10	45.72
3	12.70	20.32	8	44.45	52.07
4	19.05	26.67	9	50.80	58.42
5	25.40	33.02	10	57.15	64.77
6	31.75	39.37			

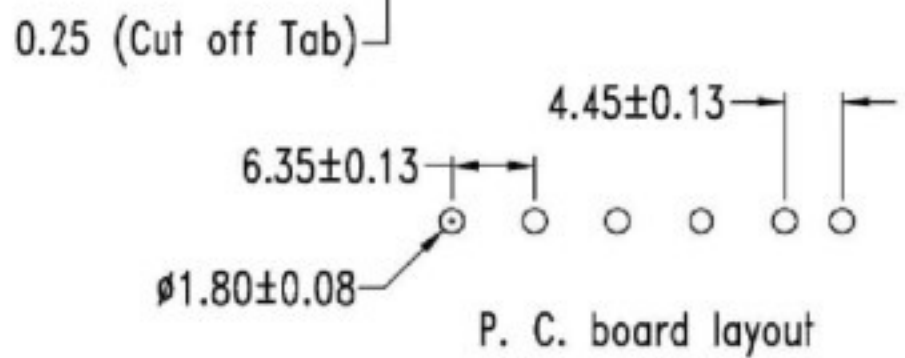

Part No.	Insulation material	Feature
SPVA-6350-1xxP	UL 94V-2	with Polarizing
SPVA-6350-1xx		without Polarizing

UNIT	mm	Projection	Secon International Enterprise Co., Ltd.			
TOLERANCES			TITLE			
x. = ± .xxx = ± 0.08			6.35mm(.250") Power Connector			
.x = ±0.4			PART NO. SPVA-6350-1xxP			
.xx = ±0.25			SCALE 1:1 SIZE A4 SHEET 1/1 REV A0			
DRAWN	Kevin	DATE	10-20-04			