


REVISION			
REV.	DESCRIPTION	APPROVAL	DATE
A	FIRST TIME ISSUE	CUIMANMAN	09.09.12

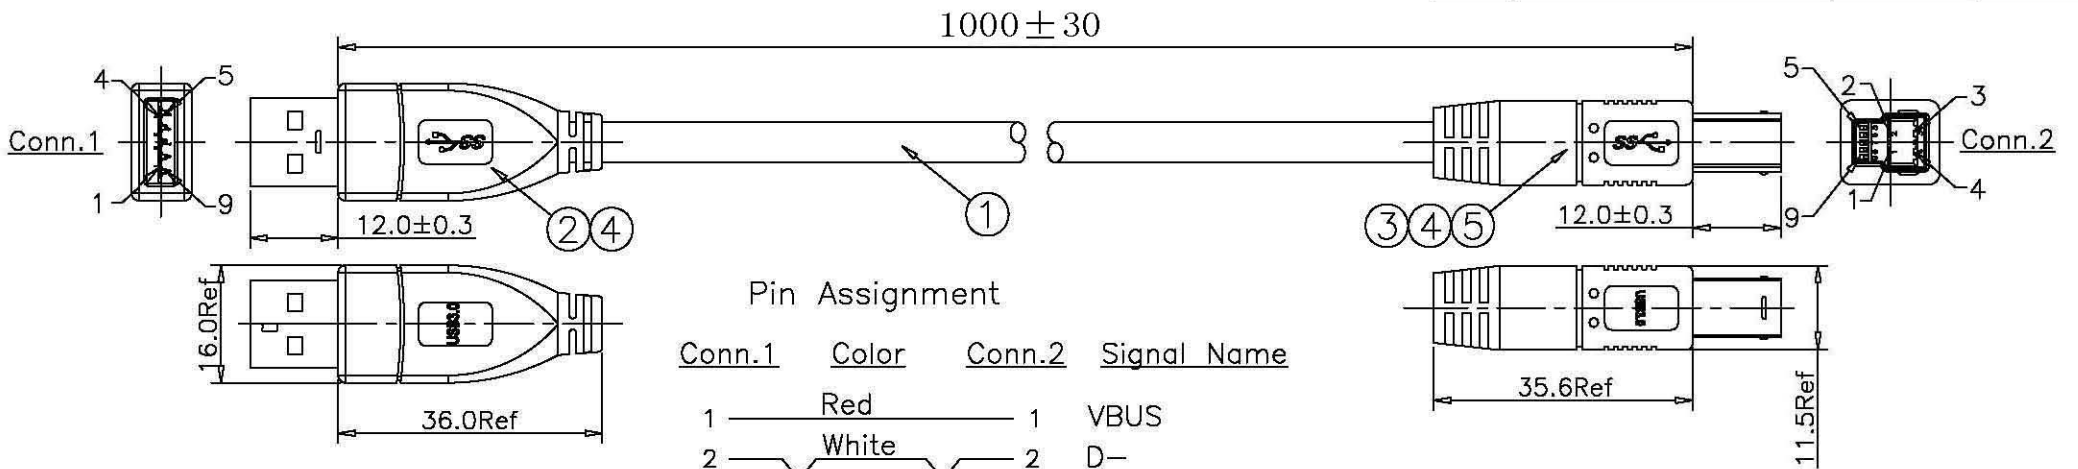

Pin Assignment

Conn.1	Color	Conn.2	Signal Name
1	Red	1	VBUS
2	White	2	D-
3	Green	3	D+
4	Black	4	GND
5	Blue	5	StdA_SSRX-
6	Yellow	6	StdA_SSRX+
7	Drain Wire	7	GND_Drain
7	Drain Wire	7	GND_Drain
8	Purple	8	StdA_SSTX-
9	Orange	9	StdA_SSTX+
Shell	Braid	Shell	Shield

NOTE:

1.THIS COMPONENT AND ITS HOMOGENEOUS SUBCOMPONENTS ARE ROHS COMPLIANT.

ELECTRONIC TEST CONDITION:
 100% OPEN SHORT & MISWIRE TEST.
 CONTACT RESISTANCE:2Ω/MAX
 INSULATION RESISTANCE:15MΩ/MIN.AT DC 300V

⑤	PVC	MOLDED 45 PVC BLUE(S603)	2PCS
④	LD-PE	MOLDED LD-PE	1PCS
③	CONN	USB 3.0 B MALE,SOLDER TYPE,INSULATOR BLUE,CONTACT	1PCS
		GOLD PLATED 30U", SPCC SHELL NICKEL PLATED	
②	CONN	USB 3.0 A MALE,SOLDER TYPE,INSULATOR BLUE,CONTACT	1PCS
		GOLD PLATED 30U", SPCC SHELL NICKEL PLATED	
①	CABLE	USB 3.0 UL20276 [(28AWG/1P+MY/AL+D)*2] +	1PCS
		28AWG*2C+28AWG/1P+AL+F+Braid(144/0.10TC)	
		PVC JACKET:BLUE O.D:5.5±0.1mm.	
ITEM	NAME	DESCRIPTION	Q'TY

mm SCALE NONE SHEET 1/1 DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED .X ± .XX ± .XXX ± ANGLES ± REV. A CUS. REV.	PART NO. USB 3.0 A male to USB 3.0 B Male Cable blue color CUS. P/N US-SC10AMBM03B	SECONN INTERNATIONAL ENTERPRICE CO., LTD DATE CHECKED DATE APPROVED DATE
---	--	--